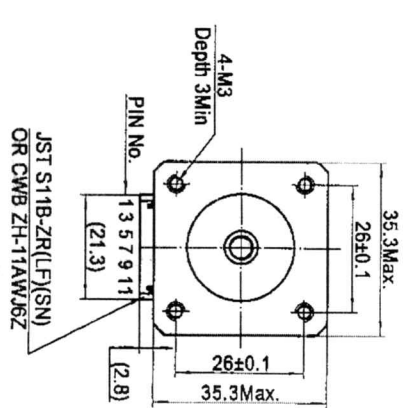
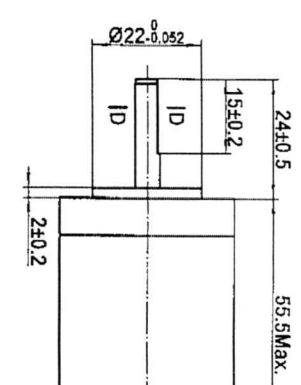



连接针位vs. 引线颜色 Pin No. vs. Lead Wire Colour			
ZHR-11 ZH-11Y ULTC3AY UL	XHP-4 PIN No.	颜色 Color	
1	4	黑 Black	
5	3	绿 Green	
7	2	红 Red	
11	1	蓝 Blue	

励磁顺序vs. 旋转方向
Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CCW
1	+	+	-	-	
2	-	+	+	+	
3	-	-	+	+	
4	+	-	-	+	


从安装面看为顺时针方向
Clockwise view from mounting side

标签 Label Detail



混合式步进电机规格 Hybrid Stepping Motor Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	3.3V DC
4. 额定电流 Rated Current	1.5Amp
5. 保持转矩 Holding Torque	0.4Nm Typ. (Two phase on/rated current)
6. 相电阻 Phase Resistance	2.2ohm±10%(20°C)
7. 相电感 Phase Inductance	3.6mH±20%(1kHz 1V ms)
8. 转子惯量 Rotor Inertia	35gcm²
9. 电机重量 Motor Weight	240g
10. 绝缘等级 Insulation Class	B(130°C)

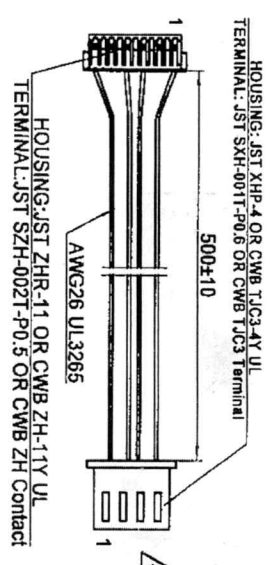



MOONS' *moving in better ways*

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

REV.	版本记录 REVISION RECORD	DATE	UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE	Drawing No: 4611110059325	Rev. A1	SCALE 1:1	Sheet 1 of 1
A1	EC-C22-347; 共计2处	2022.08.04		工艺 Process Standardize	审核 Check	8.5				
A0	原始版本 Original revision	2022.01.14		设计 Design	余贵辉	8.5				


46111100XXXXX

6±0.3
Pulley position
6±0.5
Shaft length
17.4Max.
1.5±0.2
Ø16-0.01
(2.5)
(3.5)
(2.5)

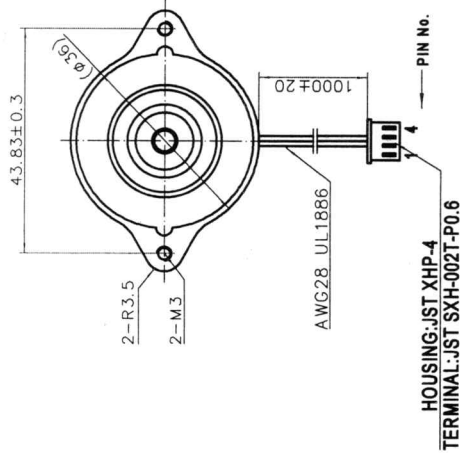

接线图

Wiring Diagram



Pin No. vs. Lead Wire Colour

PIN No.	颜色 Colour
1	蓝 BLU
2	红 RED
3	橙 ORG
4	黑 BLK

励磁顺序 vs. 旋转方向

Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

规格 Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	1.9V DC
4. 额定电流 Rated Current	1A
5. 保持力矩 Holding Torque	100mNm Typ. (Two phases on rated current)
6. 相电阻 Phase Resistance	1.9Ω±10% (20°C)
7. 相电感 Phase Inductance	1.41mH±20% (1kHz 1V rms)
8. 转子惯量 Rotor Inertia	9gcm²
9. 电机重量 Motor Weight	85g
10. 绝缘等级 Insulation Class	B(130°C)

齿轮规格 Gear Specification

齿型 Profile	渐开线 Involute
模数 Module	m=0.5
齿数 Number of Teeth	Z=10
压力角 Pressure Angle	a=20°
齿顶圆直径 Outside DIA	da=6
分度圆直径 Pitch DIA	d=5
材料 Material	SUS303

MOONS' STEPPING MOTOR
TYPE CSE14HRA1L10A-01
XXXXXXXX YY/MM/DD

Work Order 加工单
Date 日期

Unit: mm

第一角画法

FIRST ANGLE METHOD
未注线性与角度尺寸公差
Tolerances for linear and angular dimensions without individual tolerance indications
GB/T 1804-m eqv ISO 2768-1 : m
未注形状与位置尺寸公差
Geometrical tolerances for features without individual tolerance indications
GB/T 1194-K eqv ISO 2768-2 : K



批准 Approve

标准化 Standard

工艺 Technology

审核 Check

设计 Design

NAMES

SIGNATURE

DATE

Rev.A0

MOONS'

Shanghai Moons' Electric Co., Ltd.

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

Hybrid Stepping Motor

Type: CSE14HRA1L10A-01



Rev.A0

SCALE 1:1

Sheet 1 of 1

物料号
Material NO.

JST 56B-PH-K-S (LF) (SN)
or MOLEX 89401-0610

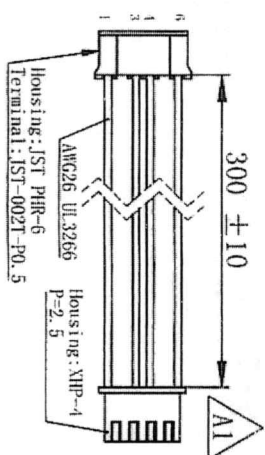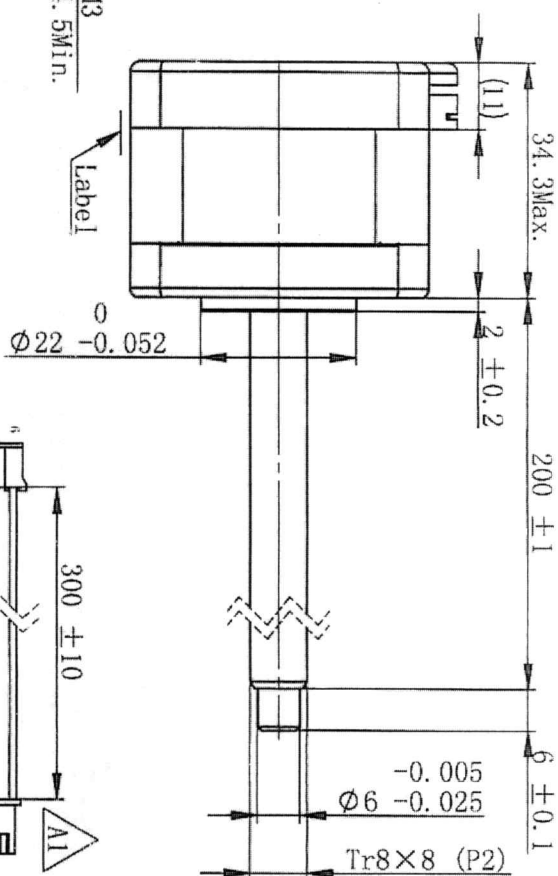

励磁顺序 vs. 旋转方向
Exciting Sequence vs.
Direction of Rotation

STEP	A	B	C	D
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

CW

CCW

从安装面看为顺时针方向
Clockwise view from
mounting side

STEP	A	B	C	D
1	+	+	-	-
2	-	+	+	-
3	-	-	+	+
4	+	-	-	+

接线图
Wiring Diagram

P-01517 710-01984

1	相数 Number of Phase	2
2	步长 Linear Travel/Step	0.04 mm (1.8°)
3	额定电压 Rated Voltage	5.7 V DC
4	额定电流 Rated Current	0.65 Amp
5	额定推力 Rated Thrust	34 N (6300 rpm, rated current)
6	相电阻 Phase Resistance	8.7 ohm $\pm 10\%$ (20°C)
7	相电感 Phase Inductance	15.2 mH $\pm 20\%$ (1 kHz 1V rms)
8	转子惯量 Rotor Inertia	38 gcm ²
9	重量 Weight	0.21 Kg
10	绝缘等级 Insulation Class	B (130°C)
11	丝杠直径 Screw Diameter	8 mm
12	丝杠导程 Lead	8 mm

受控文件
日期 2022-8-9
上海大智慧数据服务有限公司

连接器针位 vs. 引线颜色 Pin No. vs. Lead Wire Colour				
连接器 连接器	Pin No.	颜色 Colour	Pin No.	连接器 连接器
PHR-6	1	黑 BLA	4	XHP-4
PHR-6	3	绿 GRN	3	XHP-4
PHR-6	4	红 RED	2	XHP-4
PHR-6	6	蓝 BLU	1	XHP-4

Pin No. vs. Lead Wire Colour

Terminal: IST-002T-P0.5

版本变更

版本

变更说明

茶名

印 籍

A1	
----	--

增加连接器XHP-4

杨淑娟

2022/8/4

 II. **Keep nut on screw.**
非专业人士请勿拆卸电力
Avoid disassembly without

未标注线性尺寸和公差
tolerance for linear and dimension
without individual tolerance indications
GB/T 1804-A1 eqv ISO 2768-1:MA

未标注形状和位置尺寸公差
Geometrical tolerance for features
without individual tolerance indications
GB/T 1184-K eqv ISO 2768-2:K

Design	杨淑娟	2022/9/4	 
校核 Check	张杰	8.9.	First Angle Method

MOONS'
moving in better ways
 上海市闵行区
 鸣嘉路168号
 (021) 52634688

材料
Material

12

	●
	●
	●
	●

100

1

1

标准 Standard	8/10
批准 Approve	8/9

Page

1 of 1

版本
Version

1:1	
A1	

型号	Model NO.
物料号	Material NO.

LE1745-46

408-200-0-
230000430

65

