




D-D(2:1)

Ø5.0±0.012

4.5±0.1

混合式步进电机规格 Hybrid Stepping Motor Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	3.3V DC
4. 额定电流 Rated Current	1.5Amp
5. 保持力矩 Holding Torque	0.4Nm Typ.(Two phase on/rated current)
6. 相电阻 Phase Resistance	2.2ohm±10%(20°C)
7. 相电感 Phase Inductance	3.6mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	35gcm²
9. 电机重量 Motor Weight	240g
10. 绝缘等级 Insulation Class	B(130°C)

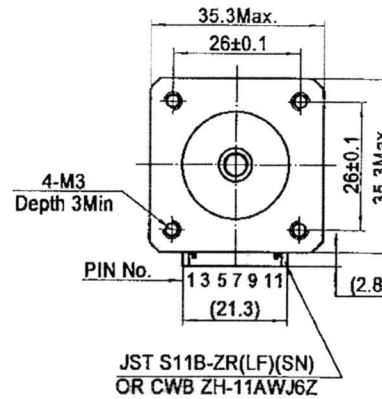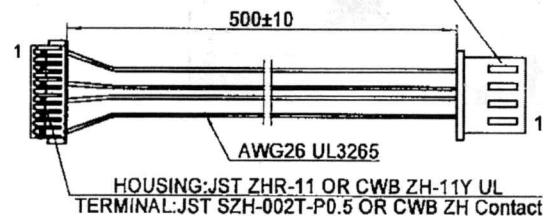JST S11B-ZR(LF)(SN)
OR CWB ZH-11AWJ6ZHOUSING: JST XHP-4 OR CWB TJC3-4Y UL
TERMINAL: JST SXH-001T-P0.6 OR CWB TJC3 Terminal接线图
Wiring Diagram① 连接器针位 vs. 引线颜色
Pin No. vs. Lead Wire Colour


ZHR-11 ZH-11Y UL PIN No.	XHP-4 TJC3-4Y UL PIN No.	颜色 Color
1	4	黑 Black
5	3	绿 Green
7	2	红 Red
11	1	蓝 Blue

励磁顺序 vs. 旋转方向
Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	CCW
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向
Clockwise view from mounting side

标签 Label Detail

MOONS'
moving in better ways

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

Unit: mm

第一角画法
FIRST ANGLE METHOD未注线性与角度尺寸公差
Tolerances for linear and angular dimensions
without individual tolerance indications

GB/T 1804-m eqv ISO 2768-1: m

未注形状与位置尺寸公差
Geometrical tolerance for features without
individual tolerance indications

GB/T 1184-K eqv ISO 2768-2: K

批准 Approve

标准化 Standardize

工艺 Process Review

审核 Check

设计 Design

NAMES

SIGNATURE

DATE

8.5
8.4
8.5
8.5
余贵辉
2022.08.04

Drawing No: 4611110059325

Rev. A1

SCALE 1:1

Sheet 1 of 1

A1 EC:C22-347;共计2处

A0 原始版本 Original revision

REV. 版本记录 REVISION RECORD




2022.08.04

2022.01.14

DATE

UNLESS OTHERWISE SPECIFIED


46111100XXXX

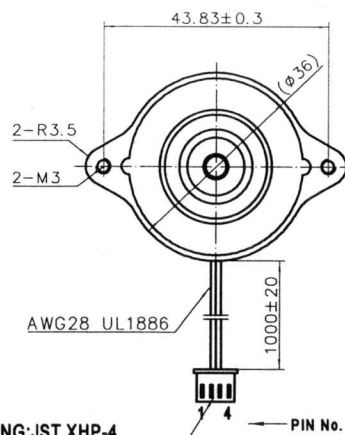

HOUSING:JST XHP-4
TERMINAL:JST SXH-002T-P0.6

接线图

Wiring Diagram



Pin No. vs. Lead Wire Colour

PIN No.	颜色 Colour
1	蓝 BLU
2	红 RED
3	橙 ORG
4	黑 BLK

励磁顺序vs.旋转方向

Exciting Sequence vs. Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	CCW ↑ ↓ CW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向

Clockwise view from mounting side

规格 Specifications


1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	1.9V DC
4. 额定电流 Rated Current	1A
5. 保持力矩 Holding Torque	100mNm Typ. (Two phases on rated current)
6. 相电阻 Phase Resistance	1.9Ω±10% (20°C)
7. 相电感 Phase Inductance	1.41mH±20% (1kHz 1V rms)
8. 转子惯量 Rotor Inertia	9gcm ²
9. 电机重量 Motor Weight	85g
10. 绝缘等级 Insulation Class	B(130°C)

齿轮规格 Gear Specification

齿型Profile	渐开线Involute
模数Module	m=0.5
齿数Number of Teeth	Z=10
压力角Pressure Angle	a=20°
齿顶圆直径 Outside DIA	da=6
分度圆直径 Pitch DIA	d=5
材料Material	SUS303

Work Order
加工单号MOONS' STEPPING MOTOR
TYPE CSE14HRA1L410A-01
XXXXXXX YY/MM/DDDate Format
日期格式Unit: mm
第一角画法
FIRST ANGLE METHOD

未注线性与角度尺寸公差
Tolerances for linear and angular dimensions without
individual tolerance indications
GB/T 1804-m eqv ISO 2768-1 : m
未注形状与位置尺寸公差
Geometrical tolerance for features without
individual tolerance indications
GB/T 1184-K eqv ISO 2768-2 : K



批准 Approve

标准化 Standard

工艺 Technology

审核 Check

设计 Design

施赛赛

2021.5.17

MOONS'

Hybrid Stepping Motor

Shanghai Moons' Electric Co., Ltd.

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

Type: CSE14HRA1L410A-01

Rev.A0

SCALE 1:1

Sheet 1 of 1

REV.

1

2

3

4

5

6


7

8

Material NO. 4611230000430

Unit: mm

JST S6B-PH-K-S(LF) (SN)
or MOLEX 89401-0610

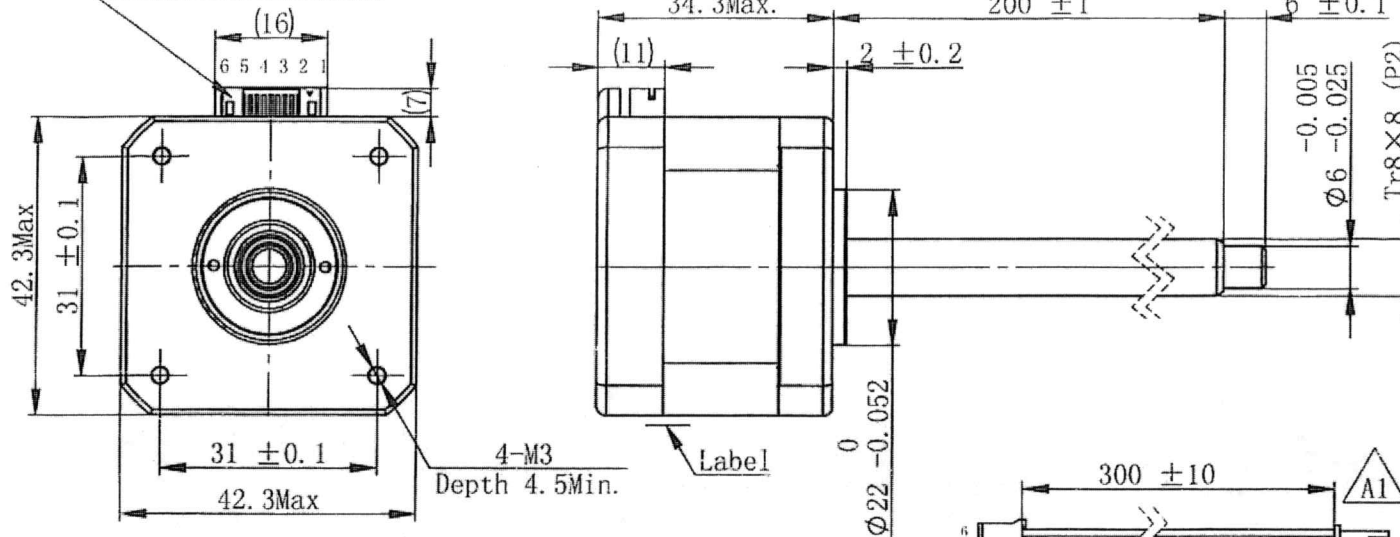

规格 Specifications

1	相数 Number Of Phase	2
2	步长 Linear Travel/Step	0.04 mm (1.8°)
3	额定电压 Rated Voltage	5.7 V DC
4	额定电流 Rated Current	0.65 Amp
5	额定推力 Rated Thrust	34 N (300rpm, rated current)
6	相电阻 Phase Resistance	8.7 ohm ± 10% (20°C)
7	相电感 Phase Inductance	15.2 mH ± 20% (1kHz 1V rms)
8	转子惯量 Rotor Inertia	38 gcm ²
9	重量 Weight	0.21 kg
10	绝缘等级 Insulation Class	B (130°C)
11	丝杠直径 Screw Diameter	8 mm
12	丝杠导程 Lead	8 mm

版本变更

版本	变更说明	签名	日期
A1	增加连接器XHP-4	杨淑娟	2022/8/4

受控文件

日期 2022-8-9

上海志邦智能自动化技术有限公司


未标注线性尺寸和公差
Tolerance for linear and dimensions
without individual tolerance indications
GB/T 1804-M eqv ISO 2768-1:M

未标注形状与位置尺寸公差
Geometrical tolerance for features
without individual tolerance indications
GB/T 1184-K eqv ISO 2768-2:K

I. 请避免螺母脱离丝杠
Keep nut on screw.
II. 非专业人士请勿拆卸电机
Avoid disassembly without
qualification.


连接器针位 vs. 引线颜色
Pin No. vs. Lead Wire Colour

连接器	Pin No.	颜色 Colour	Pin No.	连接器
PHR-6	1	黑 BLA	4	XHP-4
PHR-6	3	绿 GRN	3	XHP-4
PHR-6	4	红 RED	2	XHP-4
PHR-6	6	蓝 BLU	1	XHP-4

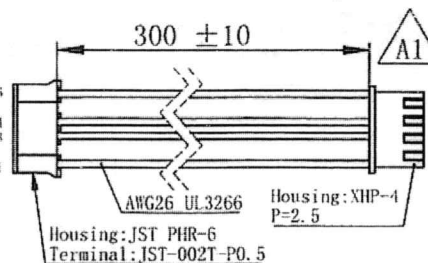

P-01517 210-0984

接线图 Wiring Diagram



励磁顺序 vs. 旋转方向
Exciting Sequence vs.
Direction of Rotation

STEP	A	B	C	D	
1	+	+	-	-	↑ CCW ↓ CW
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向
Clockwise view from
mounting side

电机标签
Motor label

MOONS' LEAD SCREW MOTOR
LE174S-T0808-200-0-S-065
XXXXXXXX

批次号

设计 Design	杨淑娟	2022/8/4	First Angle Method		上海市闵行区 鸣嘉路168号 (021)52634688
校核 Check	张杰	8/9			
工艺 Process	周子航	8/9	材料 Material	总图	比例 Scale
标准化 Standard	周子航	8/9			
批准 Approve	周子航	8/9	Page 1 of 1	版本 Version	A1
零件名 Part Name				直线步进电机	
型号 Model NO.				LE174S-T0808-200-0-S-065	
物料号 Material NO.				4611230000430	