Tank Level Report - Monthly - September 2026

nanneer global

This report presents the KPIs for Tank Level, outlining the different timings the data was captured at. The report is designed to track performance and support strategic decision-making based on the results.

Executive Summary

Parameter	Value
Report Period	Monthly
Total Readings	187
Total Items	7
Total Parameters	2
Total Alerts	7


Descriptive Statistics


Item	Parameter	Min	Max	Average
Filter Feed Tank	Level (%)	35.00	90.00	57.50
Treated Water Tank	Level (%)	20.00	95.00	69.07
Collection Tank	Level (%)	40.00	100.00	70.87
Soft Water Tank	Level (%)	40.00	90.00	65.09
SBR Aeration Tank	Level (%)	0.00	70.00	45.38


Alerts Summary

S.No	Date	Item	Parameter	Value	Status	Attended By	Resolved By
1	2026-09-01	Treated Water Tank	Level	20.00	active	-	-
2	2026-09-02	Treated Water Tank	Level	20.00	active	-	-
3	2026-09-03	Treated Water Tank	Level	20.00	active	-	-
4	2026-09-04	Treated Water Tank	Level	20.00	active	-	-
5	2026-09-07	SBR Aeration Tank	Level	15.00	active	-	-
6	2026-09-08	SBR Aeration Tank	Level	0.00	active	-	-
7	2026-09-11	Collection Tank	Level	100.00	active	-	-


Control Charts

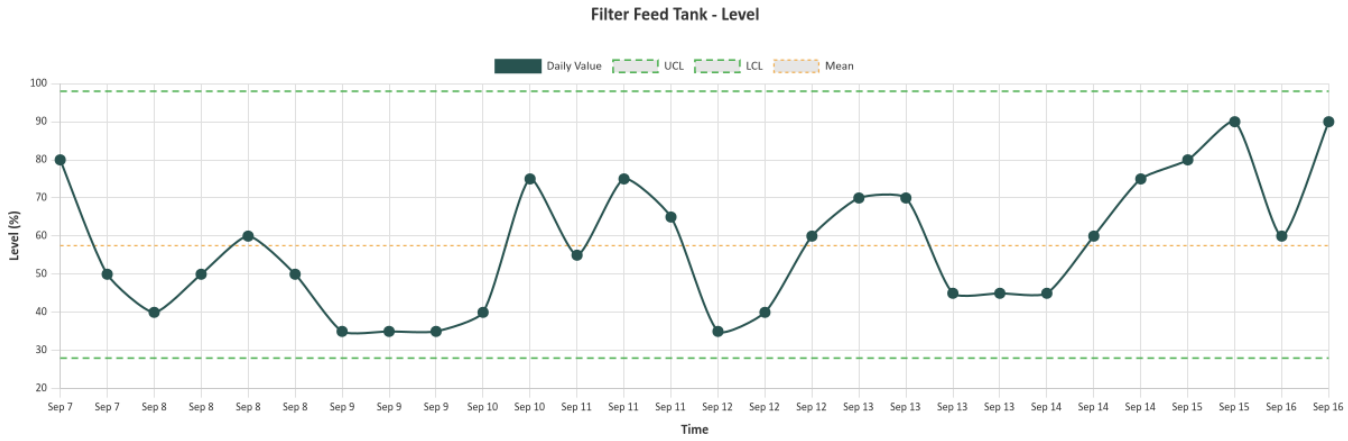

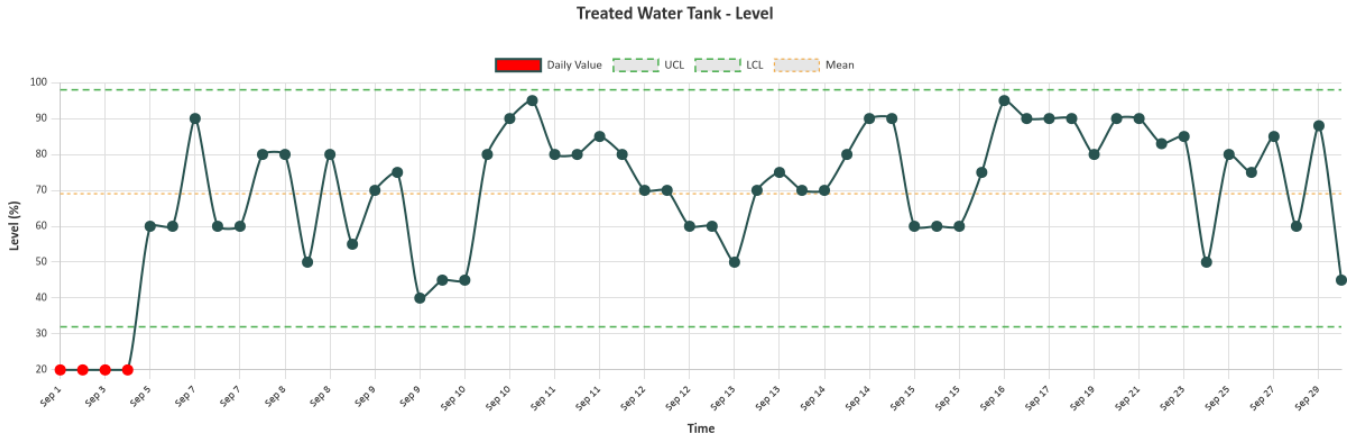


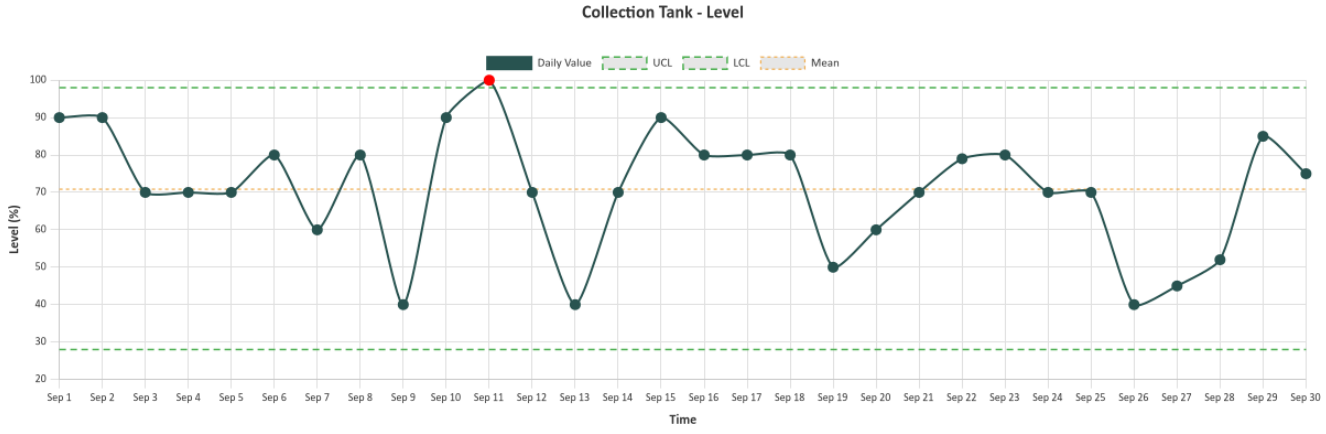

Soft Water Tank - Level

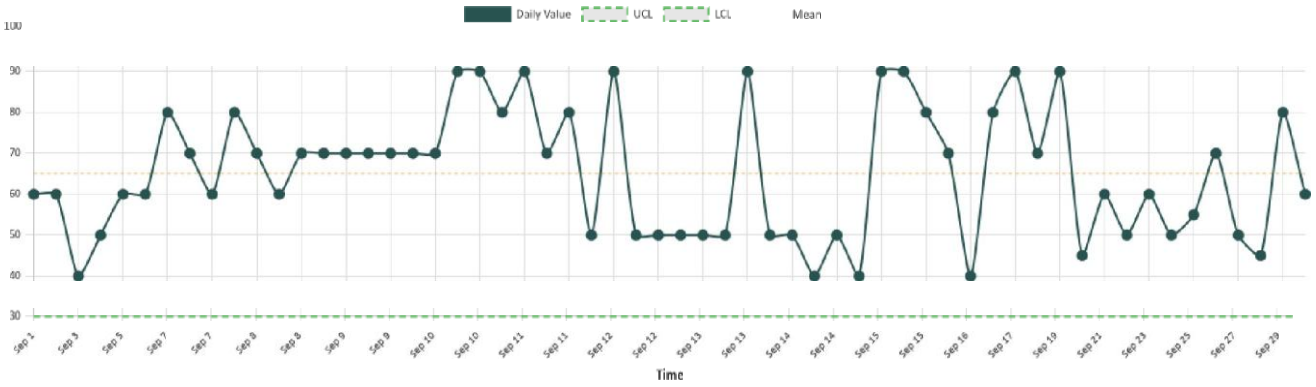

SBR Aeration Tank - Level

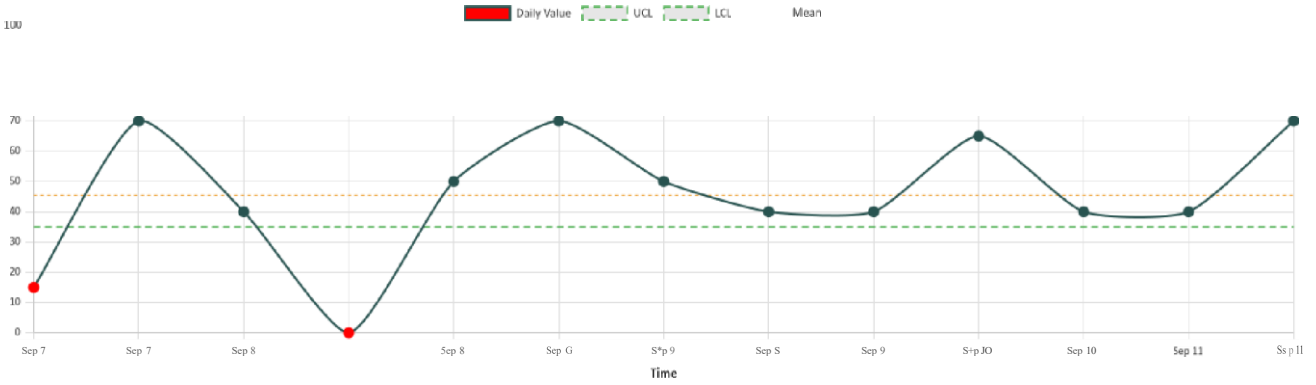

Per-Item Variability Analysis

Detailed analysis of daily average level variability for each tank in this module

Overview: This section provides item-level analysis of tank level variability. Each item's level patterns are evaluated using statistical measures including standard deviation, variance, and coefficient of variation (CV). Items with CV >= 20% are considered to have high variability and may require attention. Out of 5 items analyzed, 4 items have been identified with high variability.

Item Name	Mean	Std Dev	Variance	CV (%)	Range	Category
Collection Tank	70.87 %	15.98 %	255.25 %	22.54%	60.00 %	Moderate
Filter Feed Tank	59.50 %	13.64 %	186.00 %	22.92%	50.00 %	Moderate
SBR Aeration Tank	46.67 %	5.94 %	35.28 %	12.73%	15.00 %	Stable
Soft Water Tank	63.04 %	13.65 %	186.42 %	21.66%	50.00 %	Moderate
Treated Water Tank	66.94 %	22.18 %	491.90 %	33.13%	70.00 %	High Variability

Treated Water Tank - Process Stability Analysis

Analysis of process stability using the Coefficient of Variation (CV) metric


Coefficient of Variation (CV) Methodology: The Coefficient of Variation is a standardized measure of variability, calculated as CV = (Standard Deviation / Mean) × 100%. It provides a relative measure of variability that is independent of the scale of measurement. Lower CV values indicate more stable and consistent processes, while higher values suggest greater variability and potential optimization opportunities.

Coefficient of Variation

33.13%

CV Scale Reference

Very Stable	Stable	Moderate	High Variability
< 10%	10 - 20%	20 - 30%	> 30%

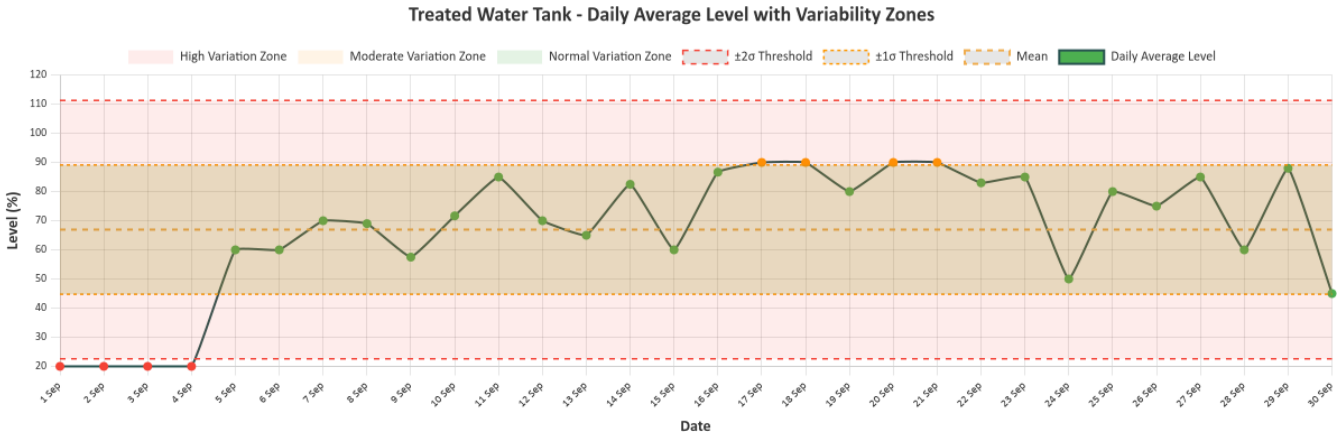

Statistical Summary

Mean Daily Level	66.94 %
Standard Deviation	22.18 %
Variance	491.90 %
Coefficient of Variation (CV)	33.13%
Range (Variation)	70.00 %
CV Category	High Variability

Consistency Analysis

Days Within ±1s (Normal Variation)	22 days (73.33%)
Days Within ±2s (Moderate Variation)	26 days (86.67%)
Days with High Variability	8 days (26.67%)

Collection Tank - Process Stability Analysis

Analysis of process stability using the Coefficient of Variation (CV) metric


Coefficient of Variation (CV) Methodology: The Coefficient of Variation is a standardized measure of variability, calculated as CV = (Standard Deviation / Mean) × 100%. It provides a relative measure of variability that is independent of the scale of measurement. Lower CV values indicate more stable and consistent processes, while higher values suggest greater variability and potential optimization opportunities.

Coefficient of Variation

22.54%

CV Scale Reference

Very Stable	Stable	Moderate	High Variability
< 10%	10 - 20%	20 - 30%	> 30%

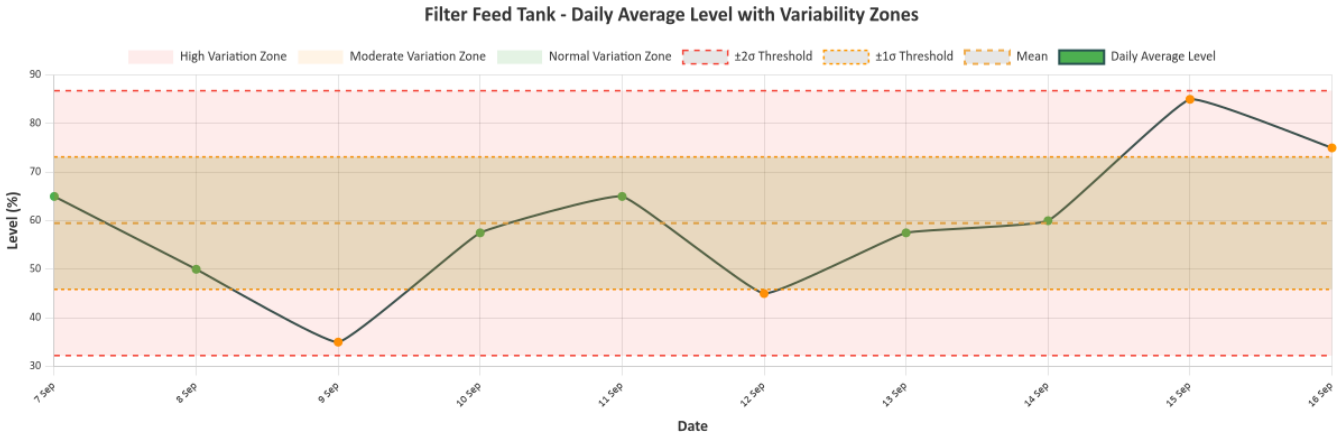

Statistical Summary

Mean Daily Level	59.50 %
Standard Deviation	13.64 %
Variance	186.00 %
Coefficient of Variation (CV)	22.92%
Range (Variation)	50.00 %
CV Category	Moderate

Consistency Analysis

Days Within ±1s (Normal Variation)	6 days (60.00%)
Days Within ±2s (Moderate Variation)	10 days (100.00%)
Days with High Variability	4 days (40.00%)

Collection Tank - Process Stability Analysis

Analysis of process stability using the Coefficient of Variation (CV) metric


Coefficient of Variation (CV) Methodology: The Coefficient of Variation is a standardized measure of variability, calculated as CV = (Standard Deviation / Mean) × 100%. It provides a relative measure of variability that is independent of the scale of measurement. Lower CV values indicate more stable and consistent processes, while higher values suggest greater variability and potential optimization opportunities.

Coefficient of Variation

22.54%

CV Scale Reference

Very Stable	Stable	Moderate	High Variability
< 10%	10 - 20%	20 - 30%	> 30%

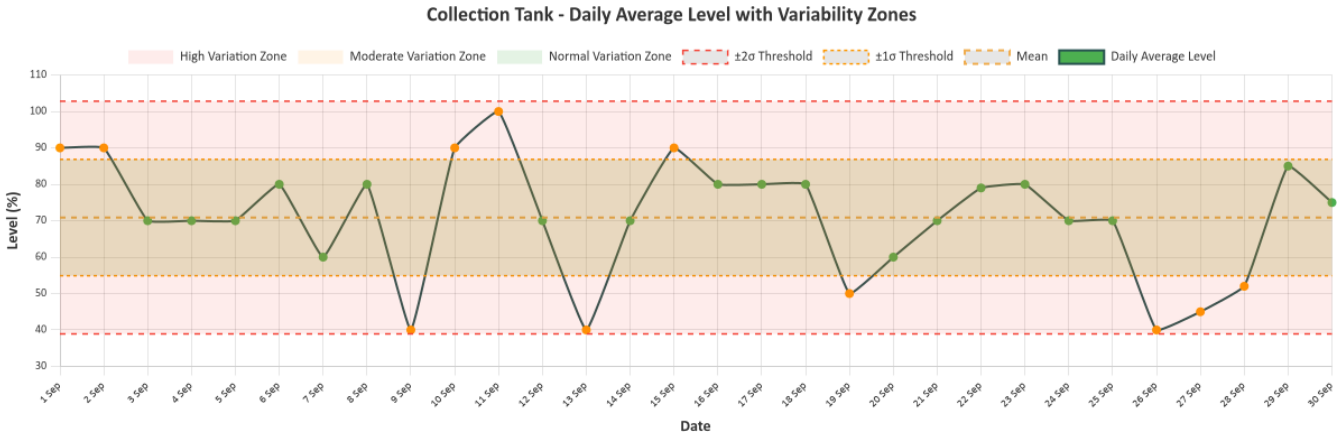

Statistical Summary

Mean Daily Level	70.87 %
Standard Deviation	15.98 %
Variance	255.25 %
Coefficient of Variation (CV)	22.54%
Range (Variation)	60.00 %
CV Category	Moderate

Consistency Analysis

Days Within ±1s (Normal Variation)	19 days (63.33%)
Days Within ±2s (Moderate Variation)	30 days (100.00%)
Days with High Variability	11 days (36.67%)

SBR Aeration Tank - Process Stability Analysis

Analysis of process stability using the Coefficient of Variation (CV) metric


Coefficient of Variation (CV) Methodology: The Coefficient of Variation is a standardized measure of variability, calculated as CV = (Standard Deviation / Mean) × 100%. It provides a relative measure of variability that is independent of the scale of measurement. Lower CV values indicate more stable and consistent processes, while higher values suggest greater variability and potential optimization opportunities.

Coefficient of Variation

12.73%

CV Scale Reference

Very Stable	Stable	Moderate	High Variability
< 10%	10 - 20%	20 - 30%	> 30%

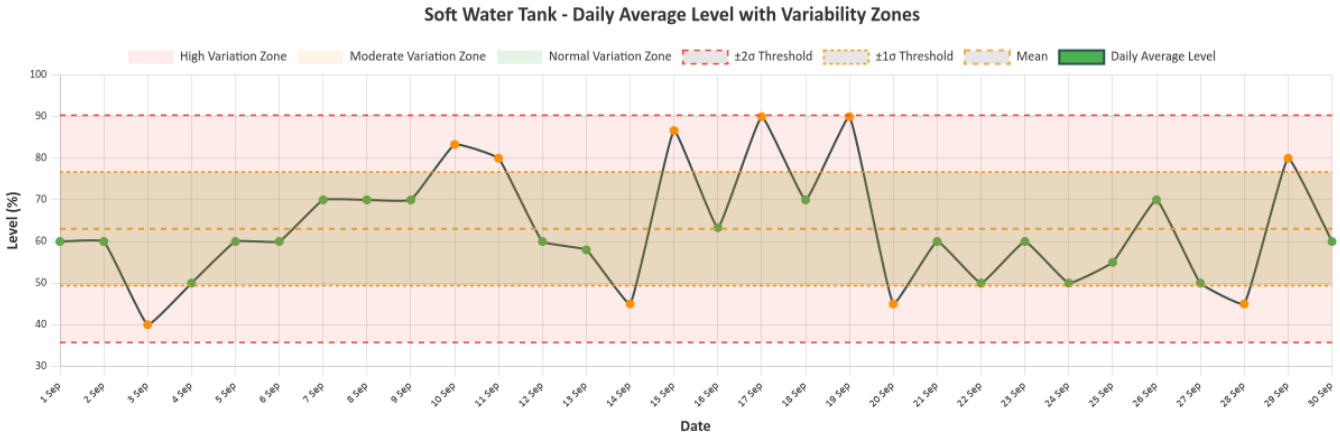

Statistical Summary

Mean Daily Level	63.04 %
Standard Deviation	13.65 %
Variance	186.42 %
Coefficient of Variation (CV)	21.66%
Range (Variation)	50.00 %
CV Category	Moderate

Consistency Analysis

Days Within ±1s (Normal Variation)	20 days (66.67%)
Days Within ±2s (Moderate Variation)	30 days (100.00%)
Days with High Variability	10 days (33.33%)

SBR Aeration Tank - Process Stability Analysis

Analysis of process stability using the Coefficient of Variation (CV) metric


Coefficient of Variation (CV) Methodology: The Coefficient of Variation is a standardized measure of variability, calculated as CV = (Standard Deviation / Mean) × 100%. It provides a relative measure of variability that is independent of the scale of measurement. Lower CV values indicate more stable and consistent processes, while higher values suggest greater variability and potential optimization opportunities.

Coefficient of Variation

12.73%

CV Scale Reference

Very Stable	Stable	Moderate	High Variability
< 10%	10 - 20%	20 - 30%	> 30%

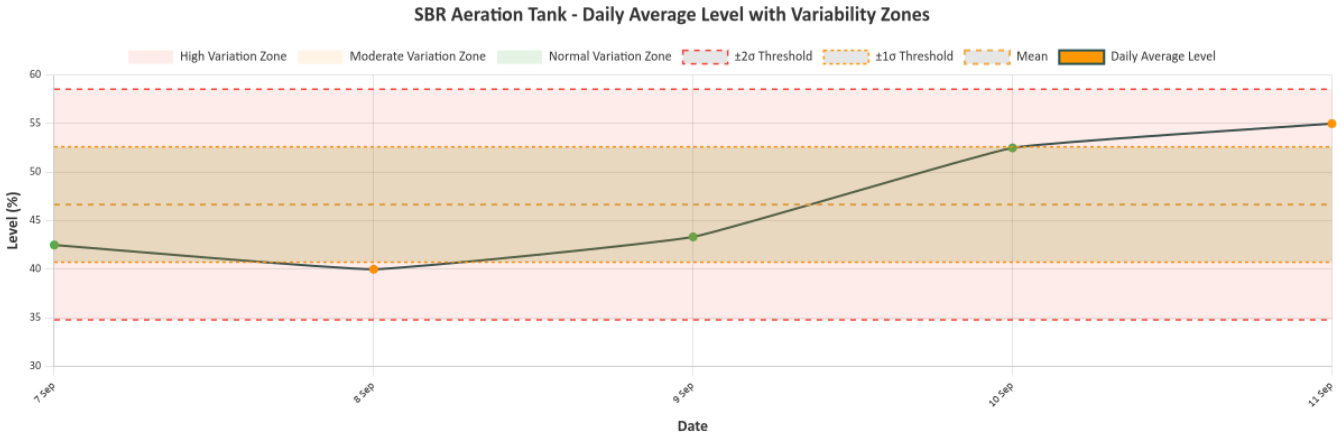

Statistical Summary

Mean Daily Level	46.67 %
Standard Deviation	5.94 %
Variance	35.28 %
Coefficient of Variation (CV)	12.73%
Range (Variation)	15.00 %
CV Category	Stable

Consistency Analysis

Days Within ±1s (Normal Variation)	3 days (60.00%)
Days Within ±2s (Moderate Variation)	5 days (100.00%)
Days with High Variability	2 days (40.00%)

SBR Aeration Tank - Process Stability Analysis

Analysis of process stability using the Coefficient of Variation (CV) metric

Appendix

Detailed daily data for Tank level

Items	Parameters	Sep 1	Sep 2	Sep 3	Sep 4	Sep 5	Sep 6	Sep 7	Sep 8	Sep 9	Sep 10	Sep 11	Sep 12	Sep 13	Sep 14	Sep 15	Sep 16	Sep 17	Sep 18	Sep 19	Sep 20	Sep 21	Sep 22	Sep 23	Sep 24	Sep 25	Sep 26	Sep 27	Sep 28	Sep 29	Sep 30
Filter Feed Tank	Level (%)	-	-	-	-	-	-	65.00	50.00	35.00	57.50	65.00	45.00	57.50	60.00	85.00	75.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MBBR Aeration Tank	Level (%)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Treated Water Tank	Level (%)	20.00	20.00	20.00	20.00	60.00	60.00	70.00	69.00	57.50	71.67	85.00	70.00	65.00	82.50	60.00	86.67	90.00	90.00	80.00	90.00	90.00	83.00	85.00	50.00	80.00	75.00	85.00	60.00	88.00	45.00
Collection Tank	Level (%)	90.00	90.00	70.00	70.00	70.00	80.00	60.00	80.00	40.00	90.00	100.00	70.00	40.00	70.00	90.00	80.00	80.00	80.00	50.00	60.00	70.00	79.00	80.00	70.00	70.00	40.00	45.00	52.00	85.00	75.00
Sludge Holding Tank	Level (%)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Raw Water Tank	Level (%)	60.00	60.00	40.00	50.00	60.00	60.00	70.00	70.00	70.00	83.33	80.00	60.00	58.00	45.00	86.67	63.33	90.00	70.00	90.00	45.00	60.00	50.00	60.00	50.00	55.00	70.00	50.00	45.00	80.00	60.00
SBR Aeration Tank	Level (%)	-	-	-	-	-	-	42.50	40.00	43.33	52.50	55.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Coefficient of Variation (CV) Methodology: The Coefficient of Variation is a standardized measure of variability, calculated as CV = (Standard Deviation / Mean) × 100%. It provides a relative measure of variability that is independent of the scale of measurement. Lower CV values indicate more stable and consistent process, while higher values suggest greater variability and potential optimization opportunities.

Coefficient of Variation

12.73%

CV Scale Reference