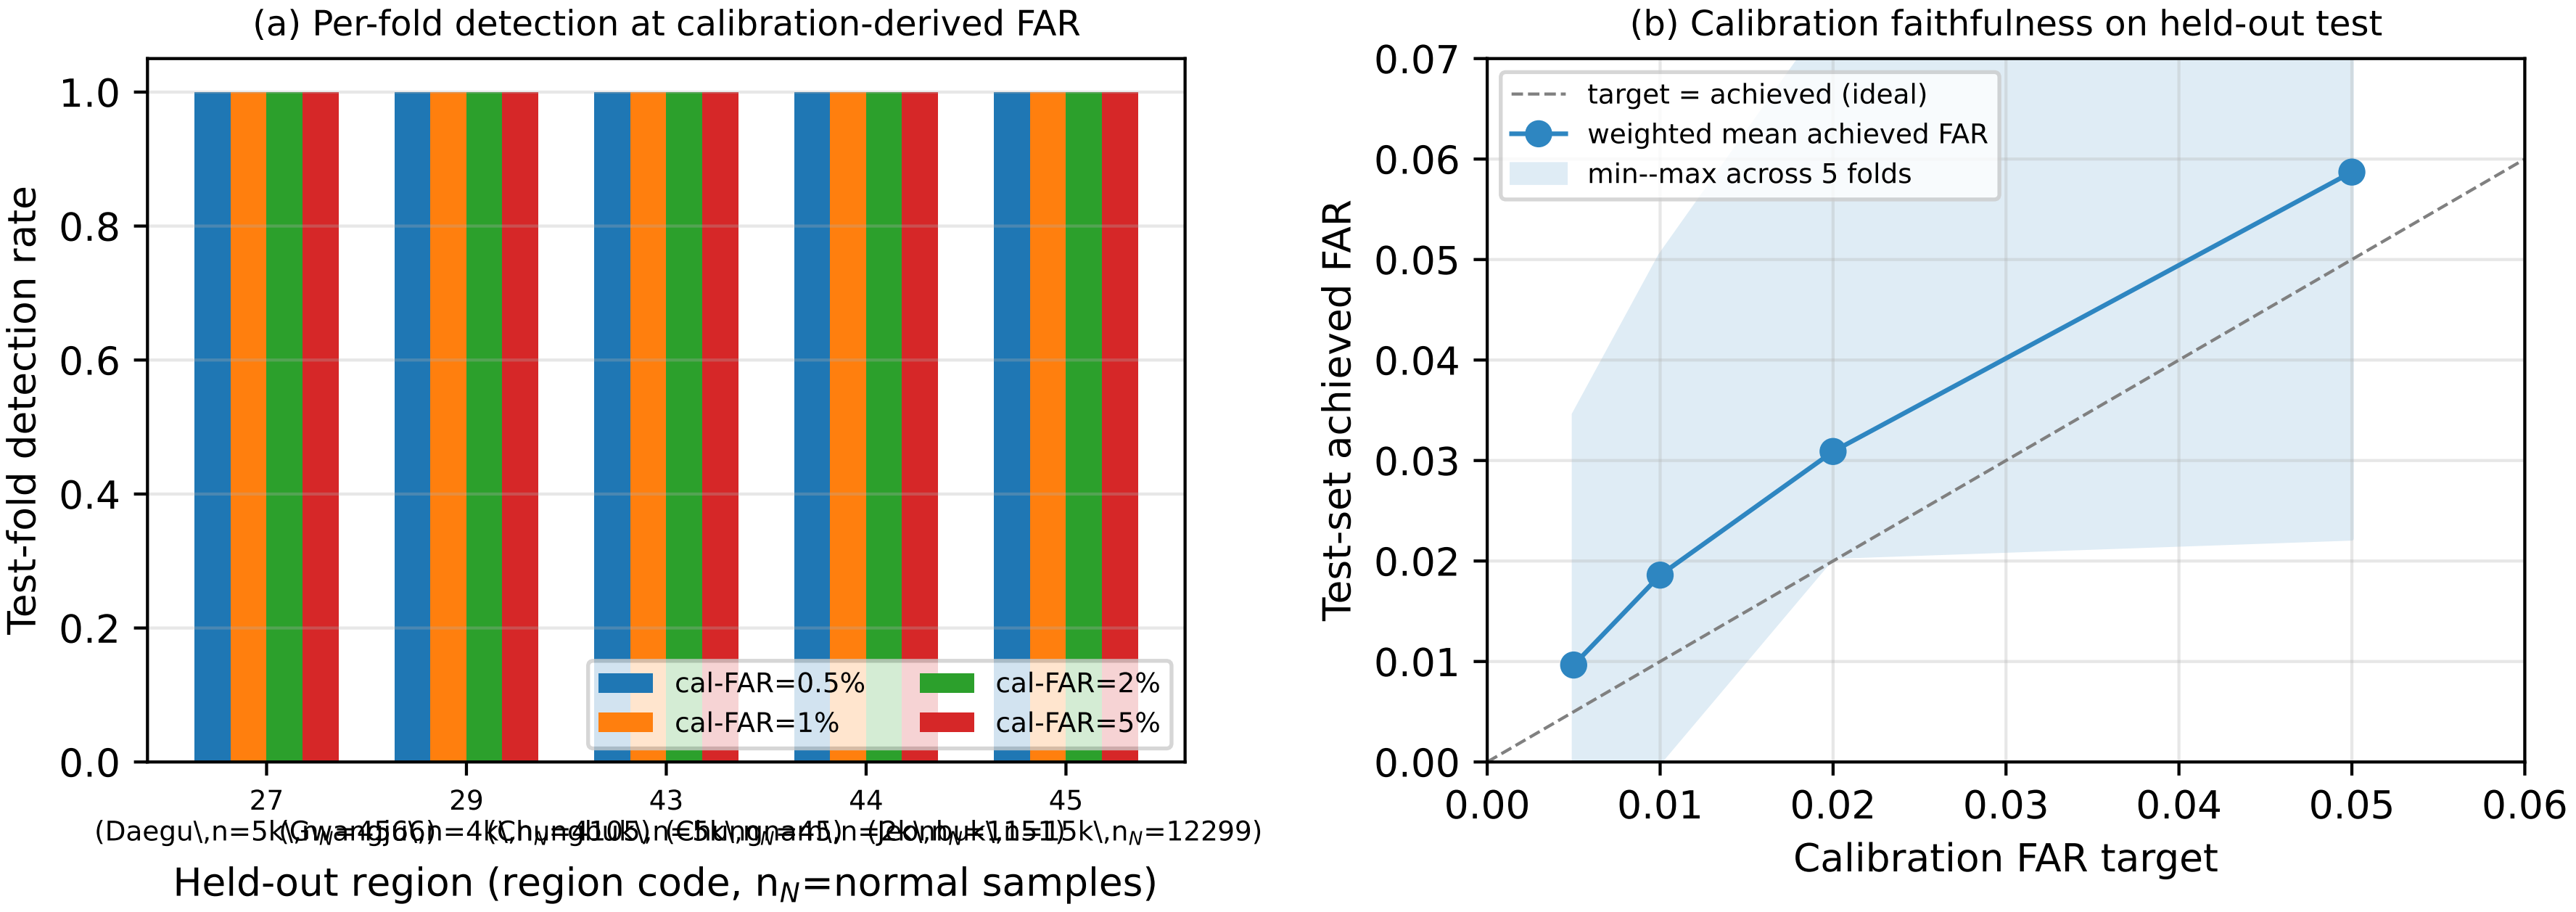
(a) Per-fold detection at calibration-derived FAR
Test-fold detection rate
1.0
0.8
0.6
0.4
0.2
0.0
cal-FAR=0.5%
cal-FAR=1%
cal-FAR=2%
cal-FAR=5%
27
29
43
44
45
(Daegu\,n=5k(\Gwangju\,n=4k(\Chungbuk\,n=5k\,n_N=45\,n=(Jeonbuk\,n=1151)5k\,n_N=12299)
Held-out region (region code, n_N=normal samples)
(b) Calibration faithfulness on held-out test
target = achieved (ideal)
weighted mean achieved FAR
min--max across 5 folds
Test-set achieved FAR
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
0.00
0.01
0.02
0.03
0.04
0.05
0.06
Calibration FAR target