


Ex.No. 14: 5G Throughput vs SNR with Modulation Labels

Objective – 1 :

MATLAB Code:

```
clc;
clear;
close all;
% SNR values (dB)
SNR = 0:5:30;
% Maximum Throughput (Mbps)
Max_TP = 100;
% Throughput calculation
Throughput = Max_TP*(1-exp(-SNR/10));
disp('SNR(dB) Throughput(Mbps)')
disp([SNR' Throughput'])
figure
% ----- Graph 1 -----
subplot(2,1,1)
plot(SNR,Throughput,'-o','LineWidth',2)
title('5G Throughput vs SNR')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Throughput (Mbps)')
grid on
% ----- Graph 2 -----
subplot(2,1,2)
bar(Throughput)
title('Throughput at Different SNR Levels')
xlabel('SNR Index')
ylabel('Throughput (Mbps)')
grid on
```

GRAPH:

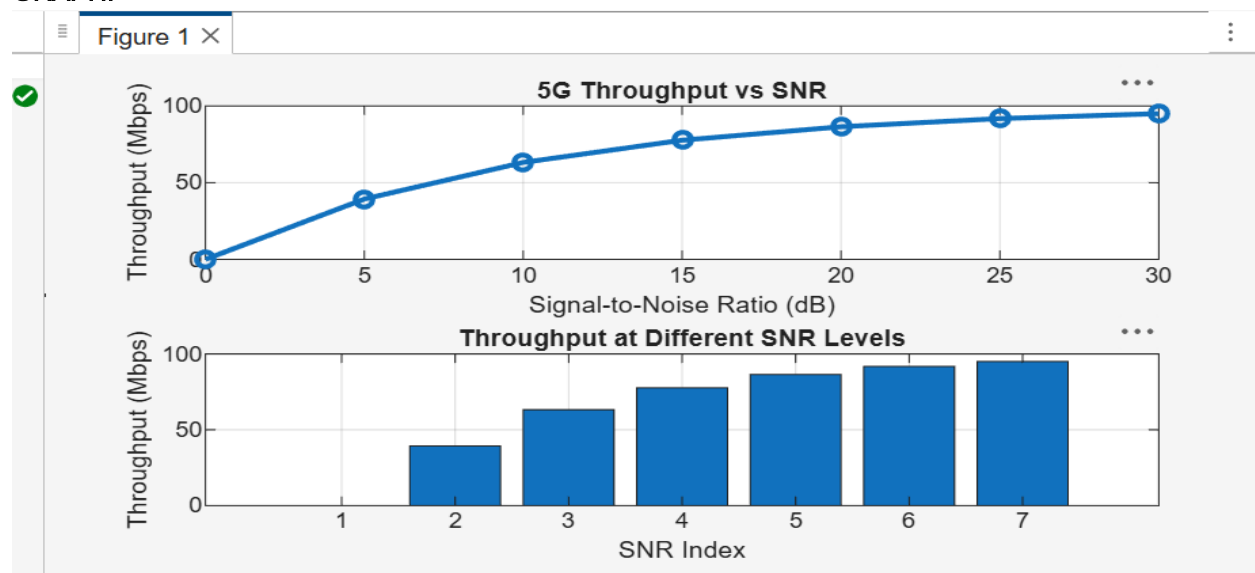


Objective – 2 :

MATLAB Code:

```
clc;
clear;
close all;
% SNR values (dB)
SNR = 0:5:30;
% Simulated Bit Error Rate (BER)
BER = [0.30 0.18 0.10 0.05 0.02 0.008 0.001];
% Reliability (%)
Reliability = (1-BER)*100;
disp('SNR(dB) BER Reliability(%)')
disp([SNR' BER' Reliability'])
figure
% ----- Graph 1 -----
subplot(2,1,1)
semilogy(SNR,BER,'-o','LineWidth',2)
title('SNR vs Bit Error Rate in 5G')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Bit Error Rate (BER)')
grid on
% ----- Graph 2 -----
subplot(2,1,2)
plot(SNR,Reliability,'-s','LineWidth',2)
title('SNR vs Communication Reliability')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Reliability (%)')
grid on
```

GRAPH:

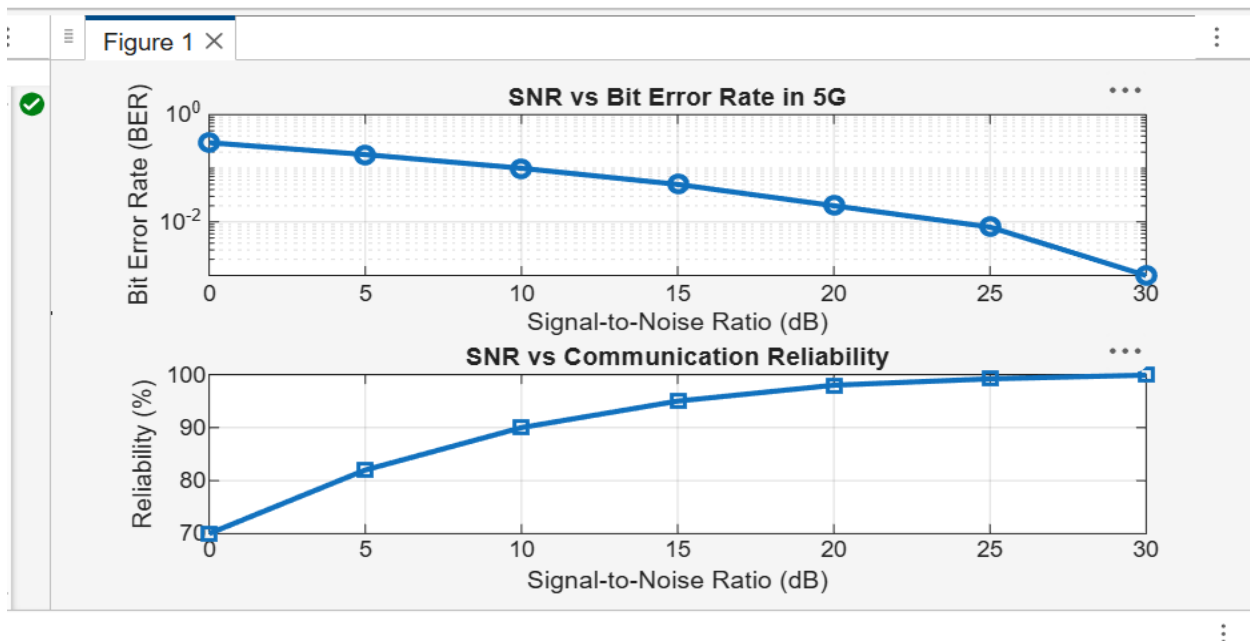

Objective – 3 :

MATLAB Code:

```
clc;
clear;
close all;
% Modulation schemes
Modulation = {'QPSK','16-QAM','64-QAM','256-QAM'};
% Required SNR (dB)
SNR = [5 10 18 25];
% Spectral Efficiency (bits/s/Hz)
Efficiency = [2 4 6 8];
disp('Required SNR (dB) and Spectral Efficiency')
disp(table(Modulation,SNR,Efficiency', ...
    'VariableNames',{'Modulation','SNR_dB','Efficiency'}))
figure
% ----- Graph 1 -----
subplot(2,1,2)
plot(SNR,Efficiency,'-o','LineWidth',2)
title('SNR vs Spectral Efficiency')
xlabel('Signal-to-Noise Ratio (dB)')
ylabel('Spectral Efficiency (bits/s/Hz)')
grid on
% ----- Graph 2 -----
subplot(2,1,1)
plot(1:4,SNR,'-s','LineWidth',2)
xticks(1:4)
xticklabels(Modulation)
title('Required SNR for Different Modulation Schemes')
xlabel('Modulation Scheme')
ylabel('Required SNR (dB)')
grid on
```

GRAPH:

