

The network diagram shows a central 2961-24T Switch0 connected to three PCs: PC0 (20.0.0.10/8), PC1 (20.0.0.20/8), and PC2 (20.0.0.30/8). The PC0 window displays the following Command Prompt output:

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 20.0.0.1: Destination host unreachable.
Reply from 20.0.0.1: Destination host unreachable.
Reply from 20.0.0.1: Destination host unreachable.
Reply from 20.0.0.1: Destination host unreachable.

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),


C:\>ping 200.0.0.10

Pinging 200.0.0.10 with 32 bytes of data:

Reply from 200.0.0.10: bytes=32 time=1ms TTL=126
Reply from 200.0.0.10: bytes=32 time=12ms TTL=126
Reply from 200.0.0.10: bytes=32 time=20ms TTL=126
Reply from 200.0.0.10: bytes=32 time=13ms TTL=126

Ping statistics for 200.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 20ms, Average = 11ms

C:\>
```

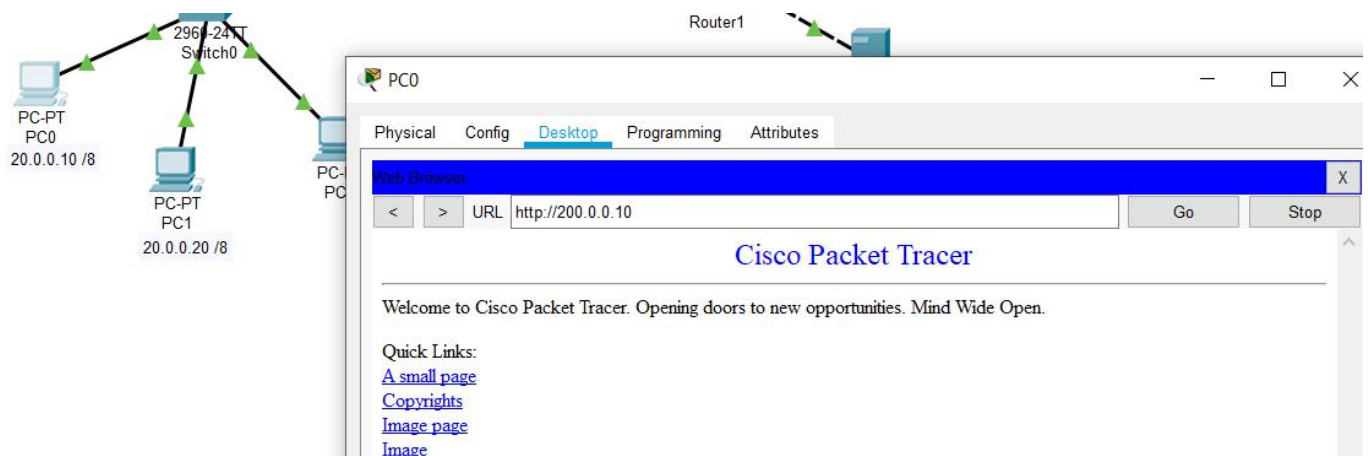

The network diagram shows a central 2961-24T Switch0 connected to three PCs: PC0 (20.0.0.10/8), PC1 (20.0.0.20/8), and PC2 (20.0.0.30/8). A Router1 is also connected to the switch. The PC0 window displays the following Web Browser output:

```
PC0
Physical Config Desktop Programming Attributes
Web Browser
< > URL http://200.0.0.10 Go Stop

Cisco Packet Tracer

Welcome to Cisco Packet Tracer. Opening doors to new opportunities. Mind Wide Open.

Quick Links:
A small page
Copyrights
Image page
Image
```