

No. 730,131.


PATENTED JUNE 2, 1903.

A. B. KLAY.
TILE.

APPLICATION FILED FEB. 9, 1903.

NO MODEL.

3 SHEETS—SHEET 1.

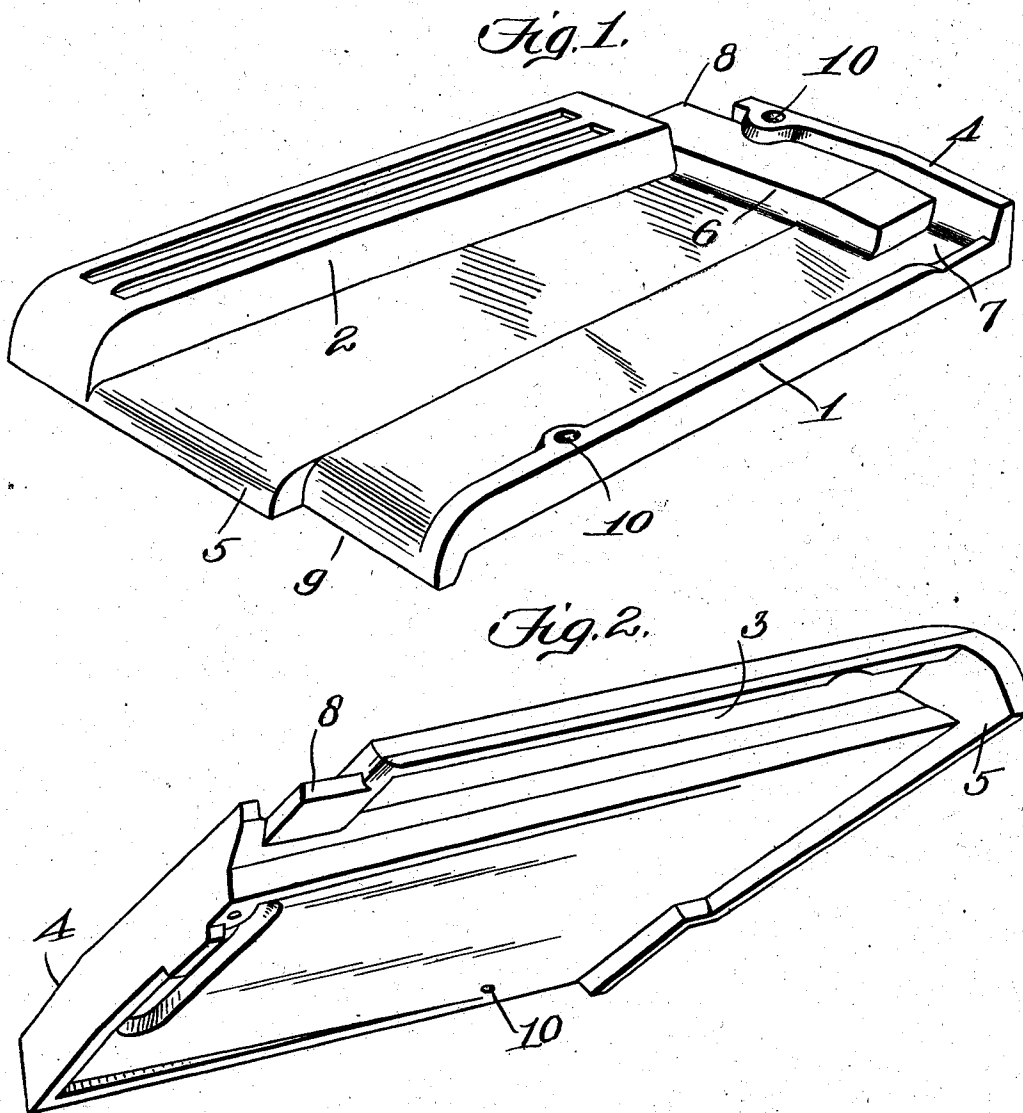

Witnesses:
C. D. Kesler.
James L. Norris Jr.

Inventor
Abraham B. Klay
James L. Norris
Atty.

No. 730,131.

PATENTED JUNE 2, 1903.


A. B. KLAY.
TILE.

APPLICATION FILED FEB. 9, 1903.

NO MODEL.

3 SHEETS—SHEET 2.

Fig. 3.

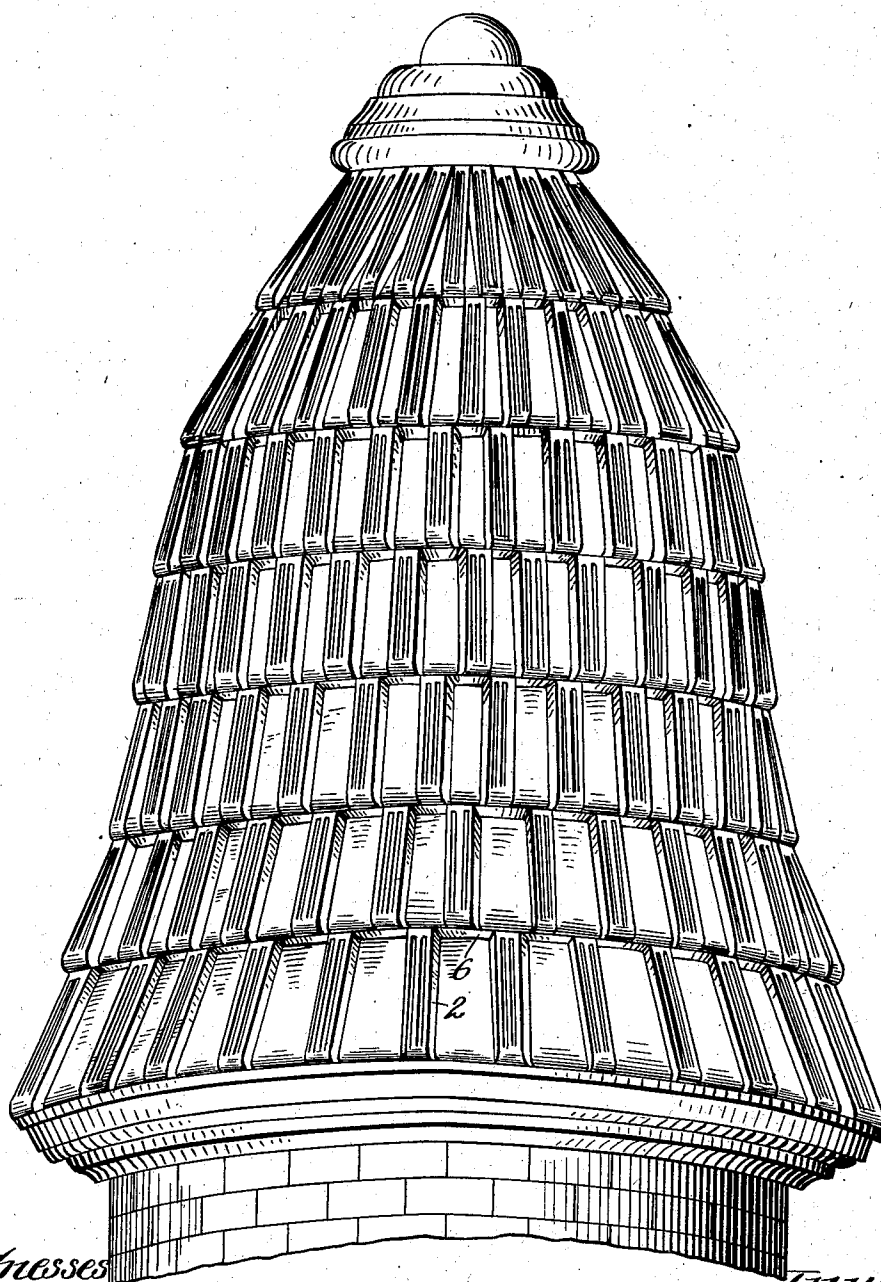

Witnesses
C. D. Kesler
James L. Norris, Jr.

Inventor
Abraham B. Klay
James L. Norris, Jr.

No. 730,131.

PATENTED JUNE 2, 1903.

A. B. KLAY.
TILE.

APPLICATION FILED FEB. 9, 1903.

NO. MODEL.

3 SHEETS—SHEET 3.

Fig. 4.


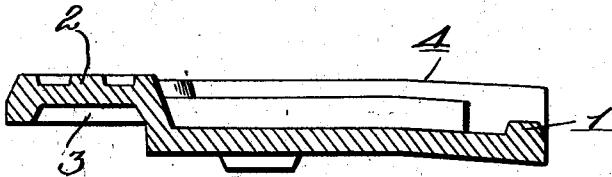


Fig. 5.

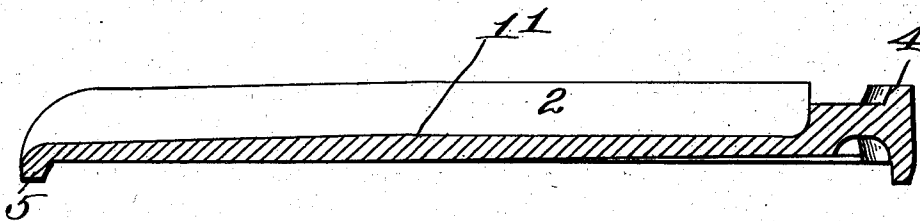

Witnesses:
Chas. D. Kessler
James L. Norris

Inventor
Abraham B. Klay
James L. Norris
Atty.

UNITED STATES PATENT OFFICE.

ABRAHAM B. KLAY, OF LIMA, OHIO, ASSIGNOR TO THE A. B. KLAY COMPANY, OF LIMA, OHIO, A CORPORATION OF WEST VIRGINIA.

TILE.

SPECIFICATION forming part of Letters Patent No. 730,131, dated June 2, 1903.

Application filed February 9, 1903. Serial No. 142,620. (No model.)

To all whom it may concern:

Be it known that I, ABRAHAM B. KLAY, a citizen of the United States, residing at Lima, in the county of Allen and State of Ohio, have invented new and useful Improvements in Tiles, of which the following is a specification.

This invention relates to a tile primarily designed for various kinds of roofing, the object of the invention being to provide a simple article of this character which possesses both strength and lightness and which is adapted to effectively interlock with adjacent tiles in different kinds of roofs, either conical or straight or the ordinary inclined kind.

Although, as before stated, the tile is intended principally for roofing work, it may be advantageously employed in other connections, and therefore it will be understood that the invention is not limited in this respect.

The improved tile has on one face, near one side, a longitudinal rib and on the opposite side and face a longitudinal channel of greater width than said rib, the channel of the tile being adapted to receive the rib of an adjacent tile in order to provide an interlock between the same, and by virtue of the fact that the channel is of greater width than the rib the tiles may be adjusted laterally within considerable limits, whereby the tile is adapted either for laying upon an ordinary inclined roof or one of a circular kind, it being necessary in the latter case to converge the tiles toward their top, and this variation in width between the channel and the rib will permit such adjustment of the tiles.

The invention is shown in one simple embodiment of the accompanying drawings, in which—

Figure 1 is a perspective view of a tile involving my invention and showing the upper surface thereof; and Fig. 2 is a like view illustrating the lower surface of the same, both of these figures being upon an enlarged scale. Fig. 3 is a face view of a roof laid with my improved tile. Fig. 4 is a cross-section of the tile. Fig. 5 is a longitudinal section of said tile.

Like characters refer to like parts in the several figures.

Referring to Figs. 1 and 2, it will be seen that the tile is transversely curved in order to adapt it to fit against circular surfaces, as in the case of conical towers, and to meet such a case as this its sides converge slightly toward the top.

Upon the upper surface of the tile and shown as what might be considered the right edge thereof is a longitudinal rib 1, said rib extending nearly along the entire length of the tile. Along the opposite edge of the tile and on the same side thereof is the longitudinal raised portion 2, represented as being substantially coextensive with the rib. Upon the inner side of the raised portion 2 is a channel 3, which channel is adapted to receive the rib 1 of an adjacent tile. It will be seen that the channel 1 is upon the inner face of the tile and on the side opposite that provided with the rib 1. The raised portion 2; it will be seen, extends sidewise from the body of the tile in the manner of a wing or flange and is adapted to overlie the outer face of an adjacent tile in order that the channel or groove therein may receive the cooperating rib 1. It will be seen that the width of the channel or groove 3 exceeds that of the rib 1, so that any one tile may be tipped sidewise or adjusted laterally with respect to the other in order to adapt the tiles perfectly to conical work. In fact, when laid upon flat work said tiles may be adjusted sidewise with respect to each other by virtue of the construction just set forth, and as the raised portions, which extend laterally from the body of the tile, cover the side joints between the tiles there is no possibility of moisture passing through such joints.

Upon the upper end of the tile and transversely thereof is a rib 4, over which the flanged lower end or inwardly-curved portion 5 of an upper tile is adapted to fit, it being seen that the said flange or curved portion 5 extends inward in order to properly fit the outwardly-projecting rib 4.

Near the upper end of the tile is a raised portion 6, which terminates short of the right edge of the tile in order to form a recess 7, into which is adapted to fit the projection 8, extending from the said raised portion of an adjacent tile when the tiles are in overlapping relation, the lower right edge of the tile hav-

ing a recess or cut-away portion 9 to receive the lower curved end of said adjacent tile, it being understood that the recesses 7 and 9 permit the free lateral adjustment of the tiles with respect to each other.

In practice the tile is formed with perforations or holes 10 at suitable places, through which nails or equivalent fastening means can be passed in order to fasten the tiles to the framing of a roof. It will be therefore understood that the improved tile has means for securing side play thereof in order to accurately adjust the same to a roof, while at the same time the tiles are interlocked properly either on straight or curved work. In practice I prefer to make the tile thicker in the center, as at 11, so that it may be freely walked over without danger of breaking. By virtue of the improved tile it is not necessary to make joints half-way up of an adjacent tile, as is customary with the ordinary kind.

Upon reference to Figs. 2, 4, and 5 it will be seen that the upper under side of the tile has a lug or projection 12, adapted to fit in a recess or upon a lath in order to hold said tile in place.

By thickening the tile at the center not only can it be freely walked over without possibility of it breaking, as hereinbefore stated, but when tiles as constructed are laid upon a roof the weight of the latter is much less than those having tiles of the ordinary kind, besides much greater strength is secured.

Having described the invention, what I claim is—

1. A tile having a longitudinal rib on its outer face near one edge, a longitudinal raised portion also on said outer face along the opposite edge and extending laterally from the body of the tile and having on its inner face a longitudinal channel substantially co-extensive with said rib, the channel being greater in width than the rib, a transverse raised portion upon the outer face near the top thereof, said raised portion extending

short of one edge of the tile to form a recess, and beyond the other edge thereof to form a projection, and a recess at its lower corner approximately in longitudinal line with said other recess.

2. A tile having a longitudinal rib on its outer face near one edge, a longitudinal raised portion also on said outer face along the opposite edge and extending laterally from the body of the tile and having on its inner face a longitudinal channel substantially co-extensive with said rib, the channel being greater in width than the rib, a transverse raised portion upon the outer face near the top thereof, said raised portion extending short of one edge of the tile to form a recess, and beyond the other edge thereof to form a projection, and a recess at its lower corner approximately in longitudinal line with said other recess, and said tile being thickest at its center and tapering toward the upper and lower ends thereof.

3. A tile having a longitudinal rib on its outer face near one edge, a longitudinal raised portion also on said outer face along the opposite edge and extending laterally from the body of the tile and having on its inner face a longitudinal channel substantially co-extensive with said rib, the channel being greater in width than the rib, a transverse raised portion upon the outer face near the top thereof, said raised portion extending short of one edge of the tile to form a recess, and beyond the other edge thereof to form a projection, a recess at its lower corner approximately in longitudinal line with said other recess, an outwardly-disposed flange upon its top, and an inwardly-disposed flange at its bottom.

In testimony whereof I have hereunto set my hand in presence of two subscribing witnesses.

ABRAHAM B. KLAY.

Witnesses:

HENRY W. NEFF,
J. H. A. O'CONNOR.