

No. 885,663.

PATENTED APR. 21, 1908.

G. N. BRUZAUD.
ROOFING TILE.

APPLICATION FILED APR. 13, 1907.

2 SHEETS—SHEET 1.

Fig. 1.


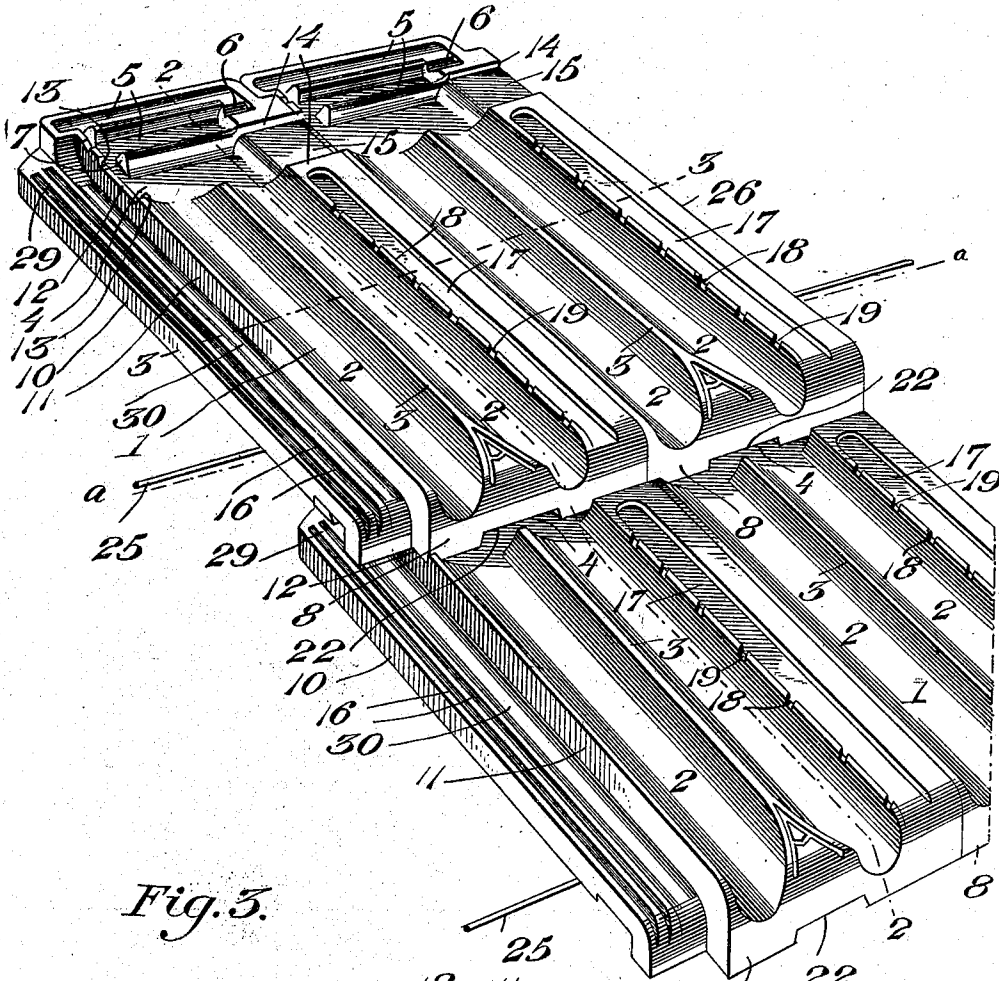


Fig. 3.

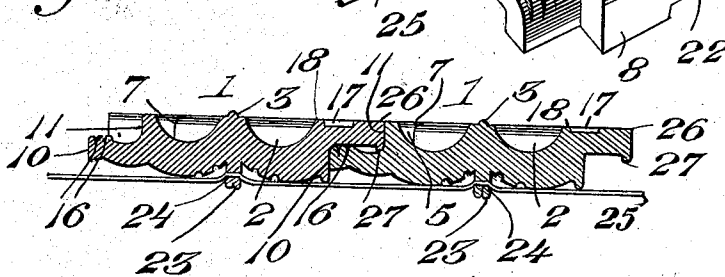

Witnesses
Phil. E. Barnes
J. J. Elmore

Inventor
Carlos N. Bruzaud.

By *Victor J. Evans*
Attorney


No. 885,663.

PATENTED APR. 21, 1908.

C. N. BRUZAUD.
ROOFING TILE.

APPLICATION FILED APR. 13, 1907.

2 SHEETS—SHEET 2.

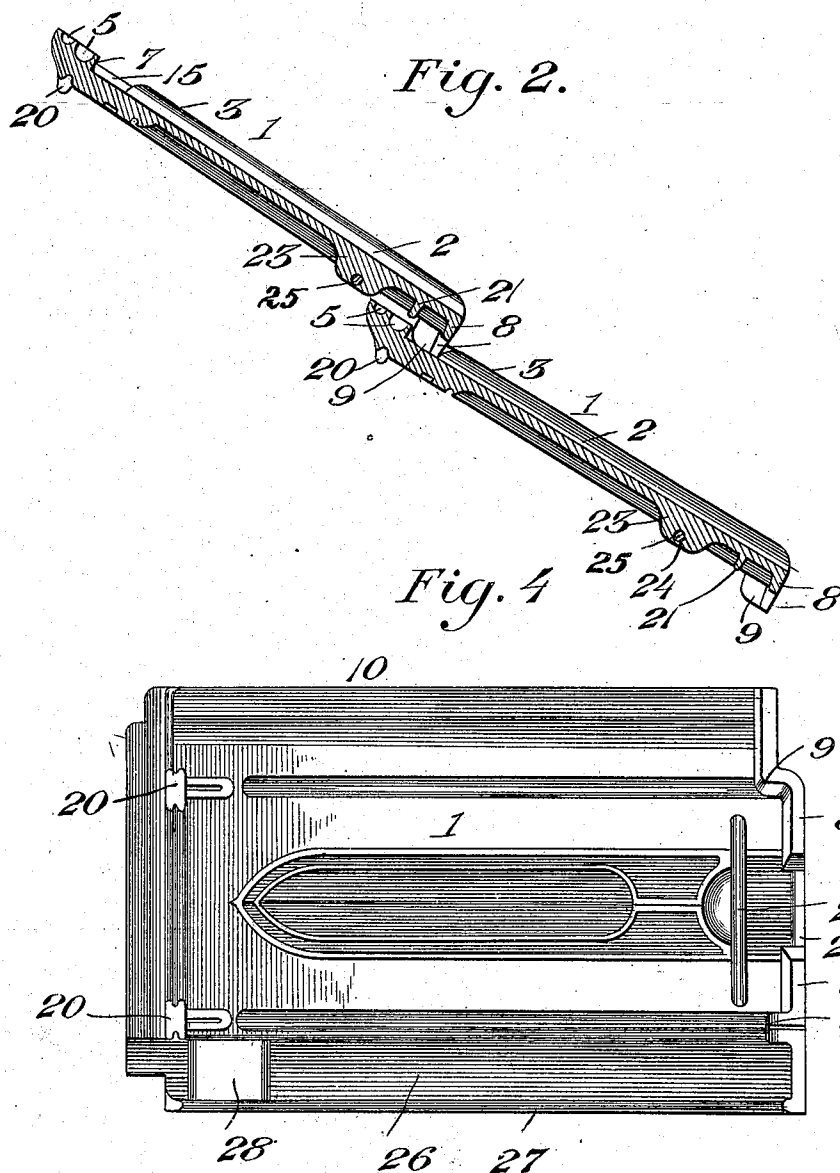

Inventor
Carlos N. Bruzard.

Witnesses

Phil. C. Barnes
A. S. Elmore

By *Victor J. Evans*
Attorney

UNITED STATES PATENT OFFICE.

CARLOS N. BRUZAUD, OF PEEKSKILL, NEW YORK.

ROOFING-TILE.

No. 885,663.

Specification of Letters Patent.

Patented April 21, 1908.

Application filed April 13, 1907. Serial No. 367,999.

To all whom it may concern:

Be it known that I, CARLOS N. BRUZAUD, a citizen of the Republic of France, residing at Peekskill, in the county of Westchester and State of New York, have invented new and useful Improvements in Roofing-Tiles, of which the following is a specification.

This invention relates to roofing tiles and has for its objects to provide a comparatively simple, inexpensive device of this character which permits of a number of tiles being readily assembled and securely interlocked in the formation of the roof, one wherein the tiles may be conveniently and securely fastened in position and one whereby rain and other moisture will be properly drained from the roof.

With these and other objects in view the invention comprises the novel features of construction and combination of parts more fully hereinafter set forth.

In the accompanying drawings:—Figure 1 is a perspective view showing a plurality of tiles embodying the invention and assembled in the formation of a roof. Fig. 2 is a longitudinal section taken on the line 2—2 of Fig. 1. Fig. 3 is a transverse section taken on the line 3—3 of Fig. 1. Fig. 4 is a reverse plan view of one of the tiles.

Referring to the drawings it will be seen that each of the tiles 1, which are identical in form, is provided on its upper or obverse face with a pair of main longitudinal grooves or channels 2 divided by a central upstanding web 3 and communicating at their upper ends with a hollow or depression 4, there being formed at the upper end of the tile a pair of transverse grooves or channels 5 which communicates one with the other through the medium of a groove or depression 6 and with the depression 4 by means of the groove 7 formed at one end of the channels 5, the tile being provided at its lower end with a depending flange 8 provided adjacent its ends and on the lower face of the tile with thickened portions or lugs 9. The tile is provided along one edge with a longitudinal side portion or flange 10 between the inner edge of which and the adjacent channel 2 there is formed a wall 11, vertically notched or recessed adjacent its upper end, as at 12, to provide stop shoulders 13 disposed in line with corresponding stop shoulders 14 formed at the other side of the tile by a depression 15, there being formed in the upper face of

flange 10 a plurality of longitudinal grooves 16 for a purpose which will presently appear, while at its other side opposite the flange 10 the tile has formed in its upper face a longitudinal groove or depression 17 separated from the adjacent longitudinal channel 2 by means of a web 18 provided with a series of transverse notches 19 through the medium of which the channel 17 communicates with the channel 2.

The tile has on its lower or reverse face, and adjacent its upper end, a pair of depending spaced lugs or feet 20 which bear on the underlying roof sheathing to hold the tile in spaced relation thereto, while adjacent the lower end of the tile there is formed a depending transverse web 21 spaced from and extended parallel with the flange 8, which is recessed at its longitudinal center, as at 22 to permit free passage of water from the depression 4 into the channels 2 when the tiles are assembled, while formed on the lower face of the tile at a point adjacent its lower end, is a depending longitudinally-extended lug 23 having a transverse perforation 24 for the reception of a tie-wire 25 to be employed in securing the tiles in place. Formed at that side of the tile opposite the flange 10 and disposed in the plane of the upper face of the tile, is a longitudinal flange 26 having at its outer edge, a rib 27, and on its lower face near its upper end, a surface enlargement 28 adapted to fit within a slight depression 29 formed at the upper end of the flange 10, which, it will be observed is disposed in the plane of the lower face of the tile.

In practice, in assembling the tiles, the side flange 26 on one tile is seated in overlapping position upon the side flange 10 of the next adjacent tile, with the bead 27 disposed in a groove 30 formed in the upper face of flange 10 and with the surface enlargement 28 seated in the depression 29, under which conditions the longitudinal edge of flange 26 will contact with the wall 11 at the inner edge of flange 10. One complete course of tiles are first laid, which are connected by means of the wire 26, threaded through the perforated lugs 23, after which the terminals of the wire are secured in some suitable manner to the underlying roof frame. One course having been laid, in laying the next course the lower end of one tile is joined to the upper end of the next adjacent tile by seating the flange 8 in the depressions 4, 12

and 15, which, it will be observed are disposed in alinement transversely of the tile, it being understood that the enlarged portions of lugs 9 will be arranged respectively in the
5 depressions 12 and 15 and will, through contact with the shoulders 13, 14, prevent relative longitudinal movement of the tiles. It is to be observed that rain or other moisture accumulating on the tiles will flow through
10 the channels 5 to the space or depression 4 and thence through the passage 22 to the longitudinal grooves 2, while the grooves 16 provide for the drainage of moisture from the flanges 10.
15 By locating the holes 24 for the tie wire 25 above the lowermost surface of the tile, the tie wire, as it is drawn through such holes, is bent and crimped as shown in Fig. 3 so that the tiles are held together as they are strung
20 along the wire.

Having thus described my invention, what I claim, is:—

A roofing tile provided with side flanges to establish an overlap with adjoining tiles of like formation and also provided with drain 25 channels in its upper surface and a longitudinal groove in its lower surface, and a projection within said groove in the bottom of the tile having a hole for the reception of a tie wire connecting with adjoining tiles, 30 which hole is located above the plane of the lowermost surface of the tile, for the purpose specified.

In testimony whereof, I affix my signature in presence of two witnesses.

CARLOS N. BRUZAUD.

Witnesses:

JOHN W. SNOWDEN,
DAVID T. DENFIELD.