

C A T A L O G U E



A HOUSE OF MACHINERY, LABORATORY & TESTING

Registered with :



MSME
सूक्ष्म, लघु एवं मध्यम उद्योग
MICRO, SMALL & ENTERPRISES
CERTIFICATE NO.: GJ32E0001121

एन एस आई सी
NSIC
The National Small Industries
Corporation Ltd
CERTIFICATE NO.: NSIC/GP/NTG/2016/0027475



ISO 9001 : 2015
CERTIFICATE NO.: 161604601



GeM
Government
e Marketplace



ए आई बी डी ए
AWARD WINNER-2017

Copyright ©

Application



ALL IN ONE TECHNOLOGY

Pharmaceuticals | Blood Chemistries
Mineral Water Plant | Industrial Water Disposal
Pollution Control | Food & Beverage
Chemical Labs | Petrol Chemical
Chemical | Agriculture | Hospitals
Textile | Dairy
Cement | Aqua Culture



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | <http://www.allinonetech.co.in>



ALL IN ONE TECHNOLOGY

COMPANY PROFILE

- ✓ Our company was established in the year 2004.
- ✓ Our company is registered with ISO, GEM, NSIC, GST, SALES TAX, SERVICE TAX etc.
- ✓ Our company has a vast experience in the field of supply of laboratory instruments, chemicals and glass wares to various Government Departments since last 10 years.
- ✓ We have been working with Gujarat Government for total 10 laboratories in the field of soil testing of the samples submitted by farmers as per the soil health card scheme launched by our Hon'ble Prime Minister Shri Narendra Modjee.
- ✓ We have tested more than 5 lacs soil samples for the various parameters fixed by the Government and issued also more than 5 lacs soil health card to the farmers.
- ✓ We have a team of technical experts who are looking after testing, training methodology and system of testing for continual improvements in the field of quality of Products.
- ✓ The turn over of our company is more than 5 crore & is on the growing stage year by year.
- ✓ We are also engaged in supply of soil testing lab set up, supply of all laboratory equipments, chemicals and glass wares in various Government. Department like; University, Agriculture Departments, Hospital, Engineering College, PWD Department etc.
- ✓ Our company is also Registered with Export Licence with an experience for exporting in various Countries.

Registered with :



CONTENTS

SR. NO.	MODEL NO.	PRODUCT NAME	PRICE	PAGE NO.
01	CAL-001	Double Beam Uv-vis Spectrophotometer	378000	01
02	CAL-002	Double Beam Uv-vis Spectrophotometer	434000	02
03	CAL-003	Double Beam Uv-vis Spectrophotometer	462000	03
04	CAL-004	Double Beam Uv-vis Spectrophotometer	504000	04
05	CAL-005	Single Beam Uv-vis Spectrophotometer	217000	05
06	CAL-006	Single Beam Uv-vis Spectrophotometer	193200	06
07	CAL-007	Single Beam Uv-vis Spectrophotometer	161000	06
08	CAL-008	Digital Spectrophotometers	42000	08
09	CAL-009	Digital Spectrophotometers	43400	08
10	CAL-010	Visible Spectrophotometers	59500	07
11	CAL-011	Digital Spectrophotometers	54600	08
12	CAL-012	FT-IR Spectrometer	2268000	09
13	CAL-013	Atomic Absorption Spectrophotometer	1694000	10
14	CAL-014	Atomic Absorption Spectrophotometer	1090000	11
15	CAL-015	Microprocessor Flame Photometers	90300	12
16	CAL-016	Microprocessor Flame Photometers	72800	12
17	CAL-017	Digital flame Photometers	46200	13
18	CAL-018	Digital flame Photometers	40600	13
19	CAL-019	Differential Blood Cell Counter	6300	14
20	CAL-020	Blood Roller Mixer	6160	14
21	CAL-021	Microprocessor Ph Meter	29400	15
22	CAL-022	Microprocessor Ph Meter	20720	15
23	CAL-023	Microprocessor Ph Meter	19320	16
24	CAL-024	Digital Ph Meters	9520	16
25	CAL-025	Digital Ph Meters	8120	16
26	CAL-026	Microprocessor Cond-tds-sal Meter	22120	17
27	CAL-027	Digital Conductivity Meters	9520	17
28	CAL-028	Digital Ph-cond. Cum Temperature Meter	12040	18
29	CAL-029	Digital Ph-cond. Cum Temperature Meter	10360	17
30	CAL-030	Digital Conductivity Meters	10360	17
31	CAL-031	Auto Digital TDS Meter	9520	18

32	CAL-032	Microprocessor Based Photo Colorimeter	11200	19
33	CAL-033	Digital Fully Automatic Colorimeter	10920	19
34	CAL-034	Digital Photo Colorimeter	10640	20
35	CAL-035	Deluxe Photo Colorimeter	10640	20
36	CAL-036	Digital Photo Colorimeter	9520	21
37	CAL-037	Digital Dry Bath Incubator	11200	21
38	CAL-038	Microprocessor Haemoglobin Meter	10360	22
39	CAL-039	Portable Haemoglobin Meter	13860	22
40	CAL-040	Digital Potentiometer	11200	23
41	CAL-041	Digital Potentiometer	9520	23
42	CAL-042	Microprocessor Turbidity Meter	12600	24
43	CAL-043	Microprocessor Turbidity Meter	11200	24
44	CAL-044	Digital Turbidity Meters	19600	24
45	CAL-045	Microprocessor D.O Meter	12600	25
46	CAL-046	Digital D.O Meters	11200	25
47	CAL-047	Digital D.O Meters	19600	25
48	CAL-048	Digital Colony Conter	6720	26
49	CAL-049	Digital Colony Counter	7000	27
50	CAL-050	Microprocessor Karl Fisher Moisture	95200	26
51	CAL-051	Auto Karl Fisher	26600	26
52	CAL-052	Microprocessor Melting Point Apparatus	50400	28
53	CAL-053	Auto Melting Point Apparatus	44800	29
54	CAL-054	Digital Melting Point Apparatus	30800	29
55	CAL-055	Digital Friability Test Apparatus	23100	30
56	CAL-056	Digital Friability Test Apparatus	20300	30
57	CAL-057	Digital Disintegration Test Apparatus	27300	31
58	CAL-058	Digital Disintegration Test Apparatus	24500	31
59	CAL-059	Digital Leak Test Apparatus	57400	32
60	CAL-060	Digital Moisture Balance	84000	32
61	CAL-061	Portable PH Meter	6300	34
62	CAL-062	Portable Conductivity Meter	6440	34
63	CAL-063	Potable Digital Dissolved Oxygen Meter	6720	34
64	CAL-064	Portable TDS Meter	6440	34
65	CAL-065	Microprocessor & Soil Analysis Kit	47600	35
66	CAL-066	Water & Soil-analysis	30800	33
67	CAL-067	Water & Soil-analysis	29400	35
68	CAL-068	Water & Soil-analysis	25200	33
69	CAL-069	Water & Soil-analysis (Without D.O.)	22400	33
70	CAL-070	Digital Photo Fluorimeter	77000	33
71	CAL-071	Digital Automatic Viscometer	189000	35
72	CAL-072	Digital Thermal Cycler PCR	308000	36
73	CAL-073	Digital Automatic Polarimeter	336000	36
74	CAL-074	Digital Automatic Polarimeter	105000	37
75	CAL-075	Microplate Elisa Reader	308000	37
76	CAL-076	Ultrasonic Cleaners (3.5 LTR Tank)	28000	38
77	CAL-077	Ultrasonic Cleaners (4.5 LTR Tank)	42000	38
78	CAL-078	Bio-nano Spectrophotometer	1092000	39
79	CAL-079	Automatic Bomb Calorimeter	168000	39
80	CAL-080	Hplc System	1148000	40
81	CAL-081	Automatic Hematology Analyzer	546000	41
82	CAL-082	Bio-chemistry Analyzer	203000	42

Registered with :





ABOUT US

VISION

Create "Intelligent analysis instrument" to meet the users, application and needs of enterprises.

MISSION

Make technical contribution to the development of science and technology.

CALTRONICS, is a high-tech enterprise with independent intellectual property rights.

At present our products have been widely used in the field of organic chemistry, inorganic chemistry, biochemistry, biotechnology, medicine, environmental protection, metallurgy, petroleum,

agriculture and so on. We have developed our brand image gradually & consistently. We are contemporary yet authentic, always evolving our fundamental philosophies to the modern arena.

Pioneering in Technology through innovative start & continuous growth,

Caltronics is becoming a fast & smart global brand of the future.

Caltronics embodies high ethical standards & doing business in a transparent & honest manner.



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DOUBLE BEAM UV-VIS SPECTROPHOTOMETER

CAL-001



TECHNICAL SPECIFICATIONS

✓ FUNCTION	Basic, Wavelength Scan, Multi Wavelength, Kinetics, Quantitative, DNA/Protein
✓ WAVELENGTH RANGE	190 - 1100 nm
✓ SPECTRAL BANDWIDTH	1.0 nm
✓ OPTICAL SYSTEM	Double Beam, Grating 1200 lines/mm
✓ WAVELENGTH ACCURACY	± 0.3 nm
✓ WAVELENGTH REPEATABILITY	± 0.2 nm.
✓ SCANNING SPEED	HI, MED & LOW, MAX. 3600 nm/min
✓ PHOTOMETRIC ACCURACY	± 0.3 %T or ± 0.002 A/h @1A
✓ PHOTOMETRIC RANGE	%T : 0 - 200% Abs : -0.3 to 3A Conc. : 0 - 9999 C
✓ STRAY LIGHT	< 0.05 %T @ 220 nm & 340 nm
✓ STABILITY	± 0.001 A/h @ 500 nm
✓ DISPLAY	5 Inches 320 x 240 Dots Graphical LCD
✓ BASELINE FLATNESS	± 0.001A/h (200 - 1000 nm)
✓ SAMPLE COMPARTMENT	2 cell holder 10 mm path-length. (50 mm & 100 mm path-length optional at extra cost)
✓ LIGHT SOURCE	Halogen & Deuterium Lamps (Pre-Aligned)
✓ PRINTER INTERFACE	Parallel Port for Dot Matrix Printer
✓ PC CONNECTIVITY	USB Port for PC connectivity
✓ POWER	230 V ± 10% AC, 50 Hz
✓ DIMENSIONS (L x B x H)	Instrument : 580 x 510 x 210 mm (Approx.)
✓ WEIGHT	Instrument : 16.0 Kg. (Approx.)



SALIENT FEATURES

- ✓ Double Beam Optics
- ✓ 320 x 240 Dots Coloured Graphical LCD
- ✓ Auto Wavelength Setting
- ✓ On-screen Standard and Kinetic Curve Display
- ✓ Tungsten/Deuterium Lamp can be turned ON/OFF Individually to Extend Lifetime
- ✓ Application Software provides complete control of the instrument from a computer through the built-in USB Port.
- ✓ Basic, WL Scan, Multi-Wavelength, Kinetic, Quantitative, DNA/Protein modes
- ✓ Pre-aligned design makes it convenient to change Lamps
- ✓ Large Sample Compartment can accommodate 5-100 mm path-length cuvettes with optional holders.

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- Software Manual
- Software CD
- USB Data Cable for PC Connectivity
- Mains Lead
- Dust Cover



Registered with :



DOUBLE BEAM UV-VIS SPECTROPHOTOMETER

(8 Cell Holder)

CAL-002



New

SALIENT FEATURES

- ✓ Double Beam Optics
- ✓ 320 x 240 Dots Coloured Graphical LCD
- ✓ Auto Wavelength Setting
- ✓ On-screen Standard and Kinetic Curve Display
- ✓ Tungsten/Deuterium Lamp can be turned ON/OFF Individually to Extend Lifetime
- ✓ Application Software provides complete control of the instrument from a computer through the built-in USB Port.
- ✓ Basic, WL Scan, Multi-Wavelength, Kinetic, Quantitative, DNA/Protein modes
- ✓ Pre-aligned design makes it convenient to change Lamps
- ✓ 8-Position Auto Cell Changer of 10mm path-length provided.

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- Software Manual
- Software CD
- USB Data Cable for PC Connectivity
- Mains Lead
- Dust Cover



TECHNICAL SPECIFICATIONS

✓ FUNCTION	Basic, Wavelength Scan, Multi Wavelength, Kinetics, Quantitative, DNA/Protein
✓ WAVELENGTH RANGE	190 - 1100 nm
✓ SPECTRAL BANDWIDTH	1.0 nm
✓ OPTICAL SYSTEM	Double Beam, Grating 1200 lines/mm
✓ WAVELENGTH ACCURACY	± 0.3 nm
✓ WAVELENGTH REPEATABILITY	± 0.2 nm.
✓ SCANNING SPEED	HI, MED & LOW, MAX. 3600 nm/min
✓ PHOTOMETRIC ACCURACY	± 0.3 %T or ± 0.002 A/h @1A
✓ PHOTOMETRIC RANGE	%T : 0 - 200% Abs : -0.3 to 3A Conc. : 0 - 9999 C
✓ STRAY LIGHT	< 0.05 %T @ 220 nm & 340 nm
✓ STABILITY	± 0.001 A/h @ 500 nm
✓ DISPLAY	5 Inches 320 x 240 Dots Graphical LCD
✓ BASELINE FLATNESS	± 0.001A/h (200 - 1000 nm)
✓ SAMPLE COMPARTMENT	8 cell with automatic cell changer - 10 mm path-length.
✓ LIGHT SOURCE	Halogen & Deuterium Lamps (Pre-Aligned)
✓ PRINTER INTERFACE	Parallel Port for Dot Matrix Printer
✓ PC CONNECTIVITY	USB Port for PC connectivity
✓ POWER	230 V ± 10% AC, 50 Hz
✓ DIMENSIONS (L x B x H)	Instrument : 580 x 510 x 210 mm (Approx.)
✓ WEIGHT	Instrument : 16.0 Kg. (Approx.)



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DOUBLE BEAM UV-VIS SPECTROPHOTOMETER

(With Variable Bandwidth)

CAL-003



TECHNICAL SPECIFICATIONS

✓ FUNCTION	Basic, Wavelength Scan, Multi Wavelength, Kinetics, Quantitative, DNA/Protein
✓ WAVELENGTH RANGE	190 - 1100 nm
✓ SPECTRAL BANDWIDTH	0.5/1.0/2.0/4.0/5.0nm (Variable)
✓ OPTICAL SYSTEM	Double Beam, Grating 1200 lines/mm
✓ WAVELENGTH ACCURACY	± 0.3 nm
✓ WAVELENGTH REPEATABILITY	± 0.2 nm.
✓ SCANNING SPEED	HI, MED & LOW, MAX. 3600 nm/min
✓ PHOTOMETRIC ACCURACY	± 0.3 %T or ± 0.002 A/h @1A
✓ PHOTOMETRIC RANGE	%T : 0 - 200% Abs : -0.3 to 3A Conc. : 0 - 9999 C
✓ STRAY LIGHT	< 0.05 %T @ 220 nm & 340 nm
✓ STABILITY	± 0.001 A/h @ 500 nm
✓ DISPLAY	5 Inches 320 x 240 Dots Graphical LCD
✓ BASELINE FLATNESS	± 0.001A/h (200 - 1000 nm)
✓ SAMPLE COMPARTMENT	2 cell holder 10 mm path-length. (50 mm & 100 mm path-length optional at extra cost)
✓ LIGHT SOURCE	Halogen & Deuterium Lamps (Pre-Aligned)
✓ PRINTER INTERFACE	Parallel port for Dot Matrix
✓ PC CONNECTIVITY	USB Port for PC Connectivity
✓ POWER	230 V ± 10% AC, 50 Hz
✓ DIMENSIONS (L x B x H)	Instrument : 760 x 550 x 240 mm (Approx.)
✓ WEIGHT	Instrument : 20.0 Kg. (Approx.)



SALIENT FEATURES

- ✓ Double Beam Optics
- ✓ 320 x 240 Dots Graphical LCD
- ✓ Auto Wavelength Setting at 0.1nm interval
- ✓ On-screen Standard and Kinetic Curve Display
- ✓ Tungsten/Deuterium Lamp can be turned ON/OFF Individually to Extend Lifetime
- ✓ Application Software provides complete control of the instrument from a computer through the built-in USB Port.
- ✓ Basic, WL Scan, Multi-Wavelength, Kinetic, Quantitative, DNA/Proteinmodes
- ✓ Pre-aligned design makes it convenient to change Lamps
- ✓ Large Sample Compartment, can accommodate 5-100 mm path-length cuvettes with optional holders.
- ✓ Optional Sipper Pump

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- Software Manual
- Software CD
- USB Data Cable for PC Connectivity
- Mains Lead
- Dust Cover



Registered with :



DOUBLE BEAM UV-VIS SPECTROPHOTOMETER

(Variable Bandwidth with 8 cell changer)

CAL-004



New

SALIENT FEATURES

- ✓ Double Beam Optics
- ✓ 320 x 240 Dots Graphical LCD
- ✓ Auto Wavelength Setting at 0.1nm interval
- ✓ On-screen Standard and Kinetic Curve Display
- ✓ Tungsten/Deuterium Lamp can be turned ON/OFF Individually to Extend Lifetime
- ✓ Application Software provides complete control of the instrument from a computer through the built-in USB Port.
- ✓ Basic, WL Scan, Multi-Wavelength, Kinetic, Quantitative, DNA/Protein modes
- ✓ Pre-aligned design makes it convenient to change Lamps
- ✓ 8-Position Auto Cell Changer of 10 mm Path-length provided.
- ✓ Optional Sipper Pump

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- Software Manual
- Software CD
- USB Data Cable for PC Connectivity
- Mains Lead
- Dust Cover



TECHNICAL SPECIFICATIONS

✓ FUNCTION	Basic, Wavelength Scan, Multi Wavelength, Kinetics, Quantitative, DNA/Protein
✓ WAVELENGTH RANGE	190 - 1100 nm
✓ SPECTRAL BANDWIDTH	0.5/1.0/2.0/4.0/5.0nm (Variable)
✓ OPTICAL SYSTEM	Double Beam, Grating 1200 lines/mm
✓ WAVELENGTH ACCURACY	± 0.3 nm
✓ WAVELENGTH REPEATABILITY	± 0.2 nm.
✓ SCANNING SPEED	HI, MED & LOW, MAX. 3600 nm/min
✓ PHOTOMETRIC ACCURACY	± 0.3 %T or ± 0.002 A/h @1A
✓ PHOTOMETRIC RANGE	%T : 0 - 200% Abs : -0.3 to 3A Conc. : 0 - 9999 C
✓ STRAY LIGHT	< 0.05 %T @ 220 nm & 340 nm
✓ STABILITY	± 0.001 A/h @ 500 nm
✓ DISPLAY	5 Inches 320 x 240 Dots Graphical LCD
✓ BASELINE FLATNESS	± 0.001A/h (200 - 1000 nm)
✓ SAMPLE COMPARTMENT	8 cell with automatic cell changer -10 mm path-length.
✓ LIGHT SOURCE	Halogen & Deuterium Lamps (Pre-Aligned)
✓ PRINTER INTERFACE	Parallel port for Dot Matrix
✓ PC CONNECTIVITY	USB Port for PC Connectivity
✓ POWER	230 V ± 10% AC, 50 Hz
✓ DIMENSIONS (L x B x H)	Instrument : 760 x 550 x 240 mm (Approx.)
✓ WEIGHT	Instrument : 20.0 Kg. (Approx.)



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

SINGLE BEAM UV-VIS SPECTROPHOTOMETER

(With Professional Scanning Software)

CAL-005



TECHNICAL SPECIFICATIONS

✓ WAVELENGTH RANGE	190 - 1100 nm
✓ SPECTRAL BANDWIDTH	2 nm
✓ OPTICAL SYSTEM	Single Beam, grating 1200 lines/mm
✓ WAVELENGTH ACCURACY	± 0.5 nm
✓ WAVELENGTH REPEATABILITY	0.4 nm
✓ WAVELENGTH RESOLUTION	0.1 nm
✓ PHOTOMETRIC ACCURACY	± 0.5 %T or 0.003 A@1A
✓ PHOTOMETRIC RANGE	- 0.3 to 3A, 0 - 200 %T, 0 - 9999 Conc.
✓ STRAY LIGHT	< 0.3 %T
✓ STABILITY	± 0.002 A/h @500 nm
✓ DISPLAY	128 x 64 Dots Large Graphical LCD
✓ KEYBOARD	Soft Touch Membrane Keys
✓ PHOTOMETRIC MODE	% Transmission, Absorbance and Concentration
✓ DETECTOR	Silicon Photodiode
✓ SAMPLE COMPARTMENT	Standard 4-Position 10 mm path-length cuvette holder. (Accommodates upto 100 mm path-length cuvette with optional holder)
✓ LIGHT SOURCE	Tungsten and Deuterium Lamps
✓ OUTPUT	USB for PC Connectivity and Parallel Port for Dot Matrix Printer
✓ PC SOFTWARE	Basic PC Software provided for quantitative / kinetic analysis with Professional PC Software for additional wavelength scan and DNA/Protein Test.
✓ POWER	230 V±10% AC, 50 Hz

SALIENT FEATURES

- ✓ Covers 190 to 1100 nm
- ✓ 4 Position Cuvette Holder
- ✓ μ P Based Wavelength Selection
- ✓ 128x64 Graphical LCD
- ✓ Printer Interface
- ✓ USB Computer Interface

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- Software Manual
- Software CD
- USB Data Cable for PC Connectivity
- Mains Lead
- Dust Cover



Registered with :



SINGLE BEAM UV-VIS SPECTROPHOTOMETER

CAL-007



SALIENT FEATURES

- ✓ Covers 190 to 1020 nm
- ✓ 4 Position Cuvette Holder
- ✓ LCD Data Display
- ✓ Printer Interface
- ✓ RS-232C Computer Interface
- ✓ Automatic Lamp Selection between UV & Visible Range

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- Software Manual
- Software CD
- RS232 Cable for PC Connectivity
- Mains Lead
- Dust Cover



TECHNICAL SPECIFICATIONS

✓ WAVELENGTH RANGE	200 - 1020 nm
✓ SPECTRAL BANDWIDTH	4 nm
✓ OPTICAL SYSTEM	Single Beam, grating 1200 lines/mm
✓ WAVELENGTH ACCURACY	± 1 nm
✓ WAVELENGTH REPEATABILITY	2.0 nm
✓ WAVELENGTH RESOLUTION	2.0 nm
✓ PHOTOMETRIC ACCURACY	± 0.5 %T or 0.003 A@1A
✓ PHOTOMETRIC RANGE	- 0.3 to 2A, 0 - 200 %T, 0 - 9999 Conc.
✓ STRAY LIGHT	< 0.3 %T
✓ STABILITY	± 0.002 A/h @500 nm
✓ DISPLAY	LCD
✓ KEYBOARD	Soft Touch Membrane Keys
✓ PHOTOMETRIC MODE	% Transmission, Absorbance and Concentration
✓ DETECTOR	Silicon Photodiode
✓ SAMPLE COMPARTMENT	Standard 4-Position 10 mm path-length cuvette holder. (Accommodates upto 100 mm path-length cuvette with optional holder)
✓ LIGHT SOURCE	Tungsten and Deuterium Lamps
✓ OUTPUT	RS 232 USB for PC Connectivity and Parallel Port for Dot Matrix Printer
✓ POWER	230 V±10% AC, 50 Hz



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

VISIBLE SPECTROPHOTOMETER

(Microprocessor Based)

CAL-010



TECHNICAL SPECIFICATIONS

✓ OPTICAL SYSTEM	Czerny-turner CT grating monochromator, 1200 lines / mm
✓ WAVELENGTH RANGE	320-1020nm
✓ SPECTRAL BANDWIDTH	6 nm
✓ WAVELENGTH ACCURACY	± 3 nm
✓ WAVELENGTH REPEATABILITY	≤1 nm
✓ MEASUREMENT RANGE	-0.000 to 1.999A, 0-199.9%
✓ PHOTOMETRIC ACCURACY	±1%T
✓ PHOTOMETRIC REPEATABILITY	0.5%T
✓ MEASURING OPTICAL PATH	50 mm
✓ STRAY LIGHT	± 1.0%T (340 nm)
✓ STABILITY	± 0.004 A/h(500 nm preheat 1 hour)
✓ DISPLAY MODES	4 modes, LCD
✓ BASIC MEASUREMENT	T, A, C, F
✓ LIGHT SOURCE	6V10W
✓ OPERATING VOLTAGE	220V/110VAC,50-60Hz

SALIENT FEATURES

- ✓ Large Sample Room to Place 50mm Cuvette
- ✓ Digital Display of %T, Abs and Conc.
- ✓ Auto Light Door and Zero Setting
- ✓ Compact Design
- ✓ Covers 320 - 1020 nm

ACCESSORIES

- Quartz Cuvettes - A Set of 2
- Glass Cuvettes - A Set of 4
- Instruction Manual
- RS232 Cable for PC Connectivity
- Mains Lead
- Dust Cover



Registered with :



DIGITAL SPECTROPHOTOMETERS

CAL-008/009/011



SALIENT FEATURES

- ✓ Range 340 to 960 nm
- ✓ Dual Digital Display for Wavelength & Data
- ✓ Wavelength Resolution 1 nm
- ✓ Highly Stable & Accurate
- ✓ Direct Concentration Facility
- ✓ 10 mm, 50 mm & 100mm path length

ACCESSORIES

- Cuvettes (10 mm) : 2 Nos. (Model LT-31)
- Cuvettes (10 mm & 50 mm) : 2 Nos. (Model LT-38)
- Cuvettes (10 mm, 50 mm & 100 mm) : 2 Nos. (Model LT-40)
- Dust Cover : 1 No.
- Operation Manual
- Operation Manual : 1 No.



TECHNICAL SPECIFICATIONS

✓ RANGE	340 to 960 nm
✓ RESOLUTION	0.1% T, Abs : 0.001, Conc. : 1
✓ OUTPUT	% T: 0 to 100%, Abs : 0 to 1.999, Conc. : 0 to 1999,
✓ DETECTOR	Silicon Photodiode
✓ LIGHT SOURCE	6 V, 10 W, Tungsten Halogen Lamp
✓ MONOCHROMATOR	600 lines/mm holographic grating
✓ SAMPLE HOLDER	10 mm Cuvette holder for CAL-008 10 mm & 50 mm Cuvette holder for CAL-009 10 mm, 50 mm & 100 mm Cuvette holder for CAL-011
✓ SPECTRAL BANDWIDTH	5 nm
✓ WAVELENGTH RESOLUTION	1 nm
✓ WAVELENGTH ACCURACY	± 2.5 nm
✓ REPEATABILITY	± 2 nm
✓ RECORDER OUTPUT	Available
✓ DISPLAY	3½ Digit Bright Red LED Dual Display for Data & Wavelength
✓ OPERATING TEMP. RANGE	50 to 45°C
✓ POWER	230 V ± 10% AC, 50 Hz
✓ DIMENSIONS (LxBxH)	475 x 285 x 130 mm (Approx.)
✓ WEIGHT	8.5 Kg. (Approx.)



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | <http://www.allinonetech.co.in>

FT-IR SPECTROMETER

CAL-012



TECHNICAL SPECIFICATIONS

- ✓ Spectral Range 7800 to 350 cm⁻¹
- ✓ Resolution Better than 0.85 cm⁻¹
- ✓ Wavelength precisions + 0.01 cm⁻¹
- ✓ Scanning speed 5- step adjustable for different applications.
- ✓ Signal to noise ratio Better than 15,000:1 (RMS Value, at 2100 cm⁻¹, resolution : 4 cm⁻¹, detector DTGS. 1 minute data collection)
- ✓ Beam Splitter Ge COATED Kbr
- ✓ Infrared source Air Cooled, high efficiency, Reflex sphere module
- ✓ Detector DTGS
- ✓ Data system Compatible computer
- ✓ Software FT-IR software contains all routines need for basic spectrophotometer operations, including library search, quantitation and spectrum export.
- ✓ IR Library 11R libraries included
- ✓ Dimensions 54 x 52 x 26 cm
- ✓ Weight 28 Kgs.

SALIENT FEATURES

- ✓ High Intensity IR source
- ✓ Wide Sample Compartment
- ✓ Plug & Play Operation
- ✓ Provided with Various Special IR Libraries

ACCESSORIES

- Thin Standard Film
- Software CD
- USB Cable
- Tool Kit
- Manual
- Dust Cover




Registered with :



ATOMIC ABSORPTION SPECTROPHOTOMETER

CAL-013

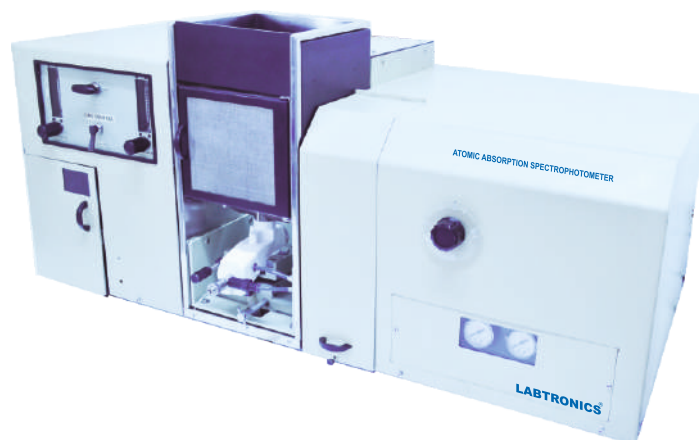

New

SALIENT FEATURES

- ✓ Highly Stable and accurate
- ✓ True Double Beam Optics
- ✓ 8 lamp turret
- ✓ Range 185 - 930 nm
- ✓ 1800 lines grating (USA)
- ✓ Variable Bandwidth 0.1 to 2 nm
- ✓ user friendly software

ACCESSORIES

- Software CD
- USB Cable
- Manual
- 4 Cathode Lamps
- Acetylene Cylinder (Optional)
- Nitrous Oxide Cylinder (Optional)
- Regulators (Optional)
- Moisture Filter (Optional)



TECHNICAL SPECIFICATIONS

✓ PARAMETER	Computer controlled, High performance, optically double beam Atomic Absorption Spectrometer having following specifications.
OPTICS MONOCHROMATOR	Real time Double beam with Deuterium background CZ design with 330 mm focal length, 1800 line/mm grating and 185-930 nm wavelength range. Automatic emission wavelength selection and peaking. Continuously variable slits with 0.2 to 2 nm spectral bandwidth. Automatic wavelength scanning. Selected wide range
DETECTOR	high performance multi-alkali Photo multiplier tube R928
MOTORIZED LAMP TURRET	Eight lamp motorized turret with automatic lamp selection and individual lamp peaking automatically warmed up. Compatible with standard & coded hollow cathode lamps
BACKGROUND CORRECTION	Deuterium arc Radiation ULTRA FAST-PULSE 1024 Hz background corrector Wave length correction range 185-425 nm. Corrects to 2.5 total absorbance
AUTOMATIC FLAME CONTROL UNIT	Programmable gas controller with digital display of flow, Full safety interlock including built in pressure regulator on both lines, power failure protection, auto shut down of flame, burner drain, door interlock and electronic flame igniter & real time status sensing, fitted bung and pressure relief bung
NEBULIZER SPRAY CHAMBER BURNER SENSITIVITY	Fully inert nebulizer PTFE spray chamber and adjustable impact bead aerosol. Titanium burners for C2 H2 -N2O & C2H2- AIR Greater than 0.7 abs for 5 mg/L copper solution with an RSD of less than 0.5% Characteristics concentration of copper 0.030 ug/ml
OUTPUR PORT	USB, Wi-Fi, BLUETOOTH CONNECTIVITY FOR PC /INTERNET
SOFTWARE DIMENSION WEIGHT ELECTRICAL REQUIREMENTS HOLLOW CATHODE LAMPS	Windows 10 based user friendly software 100 x 55 x 58 cm (L x H x W) cm 65 kg, Unpacked 220/240 V AC, 50/60 Hz, 800 VA 67 Element high intensity Single Element available



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

ATOMIC ABSORPTION SPECTROPHOTOMETER

CAL-014



TECHNICAL SPECIFICATIONS

- ✓ **PARAMETER** Computer controlled, High performance, optically single beam Atomic Absorption Spectrometer having following specifications.
- ✓ **OPTICS** Real time Single beam with Deuterium background
- ✓ **MONOCHROMATOR** CZ design with 330 mm focal length, 1800 line/mm grating and 185-930 nm wavelength range. Automatic emission wavelength selection and peaking. Continuously variable slits with 0.2 to 2 nm spectral bandwidth. Automatic wavelength scanning. Selected wide range
- ✓ **DETECTOR** high performance multi-alkali Photo multiplier tube R928
- ✓ **MOTORIZED LAMP TURRET** Four lamp motorized turret with automatic lamp selection and individual lamp peaking automatically warmed up. Compatible with standard & coded hollow cathode lamps
- ✓ **AUTOMATIC FLAME** Programmable gas controller with digital display of
- ✓ **CONTROL UNIT** Full safety interlock including built in pressure regulator on both lines, power failure protection, auto shut down of flame, burner drain, door interlock and electronic flame igniter & real time status sensing, fitted bung and pressure relief bung
- ✓ **NEBULIZER** Fully inert nebulizer
- ✓ **SPRAY CHAMBER** PTFE spray chamber and adjustable impact bead aerosol.
- ✓ **BURNER** Titanium burners for C2 H2 -N2O & C2H2- AIR
- ✓ **SENSITIVITY** Greater than 0.7 abs for 5 mg/L copper solution with an RSD of less than 0.5% Characteristics concentration of copper 0.030 ug/ml
- ✓ **OUTPUT PORT** Rs232
- ✓ **SOFTWARE** Windows 10 based user friendly software
- ✓ **DIMENSION** 100 x 55 x 58 cm (L x H x W) cm
- ✓ **WEIGHT** 65 kg, Unpacked
- ✓ **ELECTRICAL REQUIREMENTS** 220/240 V AC, 50/60 Hz, 800 VA
- ✓ **HOLLOW CATHODE LAMPS** 67 Element high intensity Single Element available

SALIENT FEATURES

- ✓ Highly Stable and accurate
- ✓ Single Beam Optics
- ✓ 4 lamp turret
- ✓ user friendly software
- ✓ Range 190 - 900 nm
- ✓ 1800 lines grating

ACCESSORIES

- Software CD
- RS 232 Cable
- Manual
- 4 Cathode Lamps
- Acetylene Cylinder (Optional)
- Nitrous Oxide Cylinder (Optional)
- Regulators (Optional)
- Moisture Filter (Optional)



Registered with :



MICROPROCESSOR FLAME PHOTOMETERS

CAL-015/016



SALIENT FEATURES

- ✓ Auto Gas Cutoff Facility
- ✓ Auto Flame Failure Detection Facility
- ✓ Inbuilt Thermal Printer (In Model 672)
- ✓ μ P Based With Printer Interface
- ✓ Five Element Measurement In Single Aspiration of the Sample
- ✓ Curve Calibration Programmability using Maximum of 25 Standards
- ✓ Data Processing Through Curve Fitting Techniques - Least Squares, Quadratic
- ✓ Multiple Calibration Curves Saving Facility
- ✓ Samples Data Storage Facility
- ✓ Online Help Key
- ✓ Printer Attachment Facility
- ✓ Measurement in ppm & meq
- ✓ Useful For Both Medical & Soil Testing Applications
- ✓ Setup Storage Facility up to 10 setups files
- ✓ Supplied with Compressor Unit

ACCESSORIES

- Air Compressor
- Chimney
- Sample Beakers
- Manual



TECHNICAL SPECIFICATIONS

✓ RANGE

General Range

ppm
Na : 0-100
K : 0-100
Ca : 0-100
Li : 0-100
Ba : 30-3000

Serum Range

meq/l
0-200 meq/l, 1:100 dil.
0-10 meq/l, 1:100 dil.
0-10 meq/l, 1:2 dil.
0-2 meq/l, 1:5 dil.
(all meq values are claimed with appropriate dilution)

Urine Range

meq/l
0-250 meq/l, 1:100 dil.
0-100 meq/l, 1:100 dil.

✓ SENSITIVITY

General Mode : Na: 0.5 ppm, K: 0.5 ppm, Li: 0.5 ppm, Ca: 15 ppm Ba: 30ppm

✓ FILTERS

Na & K Supplied (Ca, Li & Ba are optional at extra cost) {Ba can be factory fitted only}

✓ RESOLUTION

0.1 ppm / 0.1 meq.

✓ REPRODUCIBILITY

< 1% coefficient of variation for 20 consecutive samples using 10 ppm Na set as Maximum Standard up to 3% CV for 20 consecutive samples of Concentrations between 50 to 199 ppm for Barium.

✓ LINEARITY

< 2% error when 3 ppm Na/K and 5 ppm Li are set as Maximum Std.

✓ CURVE FIT ACCURACY

± 2% of FS

✓ DISPLAY

128 x 64 Graphical LCD

✓ AVERAGE TIME

In-built in Software

✓ FLAME SYSTEM

LPG & Dry Oil Free Air

✓ DETECTOR

Photodiode

✓ CALIBRATION

with up to 25 Standards of user choice with curve fitting software (5 for each Element). Multiple Calibration Curves can be stored in the memory Adjustable with knob

✓ GAS CONTROL

Auto Detection

✓ FLAME FAILURE

Automatic

✓ GAS CUTOFF

Auto Ignition

✓ IGNITION SYSTEM

Axial Flow Type

✓ AUTOMISER

Instrument : 365 x 245 x 220 mm Approx. (LxBxH)

✓ DIMENSIONS

Provision for attachment of Dot-Matrix Printer with

✓ PRINTER

centronics parallel interface

✓ PC INTERFACE

USB

✓ WEIGHT

Main Unit : 8 Kg. (Approx.)

✓ POWER SUPPLY

230 V AC ± 10%, 50 Hz



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DIGITAL FLAME PHOTOMETERS

CAL-017/018



TECHNICAL SPECIFICATIONS

- ✓ ACCURACY $\pm 2\%$ up to 100 meq, $\pm 2\%$ up to 40 ppm
 $\pm 5\%$ above 100 meq, $\pm 5\%$ above 40 ppm
- ✓ READOUT Dual 2½ digit bright red LED displays in (Model CAL-017)
- ✓ IGNITION SYSTEM In-built electronic Ignition by press of a knob
- ✓ DIMENSIONS 375 X 245 X 220 mm (Approx.)
- ✓ WEIGHT 8 Kg. (Approx.)
- ✓ MEASUREMENT SYSTEM Simultaneous measurement of 2 elements on dual LED display (Model CAL-017)
- ✓ REPEATABILITY ± 2 Counts
- ✓ DETECTOR Silicon Photodiode
- ✓ FILTERS Narrow band interference glass filters
(Na, K Filters are Supplied, Ca & Li filters are optional at extra cost)
- ✓ NEBULIZER Black bakelite, axial flow type
- ✓ FLAME SYSTEM LPG and dry oil free air
- ✓ WARM UP TIME 10 minutes
- ✓ COMPRESSOR UNIT Supplied along with the instrument ✓
- ✓ POWER 230V $\pm 10\%$ AC, 50Hz

SALIENT FEATURES

- ✓ Dual Channel in Model CAL-017
- ✓ Stainless steel round burner
- ✓ Concentric Non-Corrosive Nebulizer
- ✓ Narrow Band interface Filters
- ✓ Dual 2½ digit red LED display
- ✓ Highly Stable & Accurate

ACCESSORIES

- Air Compressor
- Chimney
- Sample Beakers
- Manual



Registered with :



DIFFERENTIAL BLOOD CELL COUNTER

CAL-019



TECHNICAL SPECIFICATIONS

✓ CELL COUNTING KEY	8 Keys
✓ TOTAL KEYS	11 Keys (8 Cell keys and 3 Function keys)
✓ BODY	Metal Body
✓ DISPLAY	16x2 Line LCD Display
✓ MAINS INPUT	230V $\pm$ 10% AC, 50 Hz
✓ WEIGHT	1.5 kg (Approx.)
✓ DIMENSIONS	250 x 230 x 150 mm (LxBxH)

SALIENT FEATURES

- ✓ Facility to count 8 Types of Cells
- ✓ 16x2 Line Alphanumeric LCD Display
- ✓ Automatic percentage (%) calculation
- ✓ Individual cells counting facility
- ✓ In-built Stop Watch and Timer function
- ✓ Audible beep facility



BLOOD ROLLER MIXER

CAL-020



TECHNICAL SPECIFICATIONS

✓ ROLLER SIZE	230mm
✓ CONTROLS	Analog
✓ NO. OF ROLLERS	4
✓ SPEED	33rpm (Approx.)
✓ MAXIMUM LOAD	5 test tubes
✓ TIMER	No
✓ POWER SUPPLY	230V $\pm$ 10% AC 50Hz.

SALIENT FEATURES

- ✓ Rocking and rolling action for complete Mixing
- ✓ Four roller design with small footprint
- ✓ Designed for continuous quiet operation
- ✓ Ambient temperature range +4°C to +60°C



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

MICROPROCESSOR pH METER

(5 Point Calibration)

CAL-021



TECHNICAL SPECIFICATIONS

pH

- ✓ RANGE -2.000 to 20.000 pH
- ✓ RESOLUTION Selectable 0.1, 0.01, 0.001 pH
- ✓ ACCURACY $\pm 0.002 \text{ pH} \pm 1 \text{ digit}$
- ✓ READ OUT 128 x 64 dots Graphical LCD Display
- ✓ CALIBRATION Auto & Manual with 5-Point Calibration
- ✓ AUTO BUFFER RECOGNITION 1.680, 4.000, 7.000, 9.200 & 12.450 pH or User Defined
- ✓ RELATIVE STABILITY $\pm 0.002 \text{ pH/Hour}$
- ✓ TEMP. COMPENSATION -5 to 110 °C Auto/Manual

mV

- ✓ RANGE 0 to $\pm 1999.9 \text{ mV}$
- ✓ RESOLUTION 0.1 mV & 0.01mV
- ✓ ACCURACY $\pm 0.1 \text{ mV} \pm 1 \text{ digit}$

TEMPERATURE

- ✓ RANGE -5 to 110 °C
- ✓ RESOLUTION 0.1 °C
- ✓ ACCURACY $\pm 0.1 \text{ °C}$
- ✓ SENSOR Semi Conductor Type
- ✓ POWER SUPPLY 230V $\pm 10\%$ AC
- ✓ PRINTER INTERFACE External Serial RS232 Dot Matrix Printer Interface
- ✓ ACCESSORIES Combination pH Electrode, Temperature Probe, Buffer Tablets 4 pH & 7pH, Electrode Stand,

SALIENT FEATURES

- ✓ Measures pH, mV and Temperature
- ✓ 5 Point Calibration
- ✓ 128 x 64 dots Graphical LCD Display
- ✓ Auto Buffer Recognition Facility
- ✓ Storage up to 1000 Samples
- ✓ PC Attachment through USB



MICROPROCESSOR pH METER

(5 Point Calibration)

CAL-022



TECHNICAL SPECIFICATIONS

PARAMETER

- | | | | |
|----------------------|---|----------------------|----------------------|
| ✓ RANGE | pH | mV | Temp°C |
| ✓ RESOLUTION | 0.00 to 14.00 pH | 0 to 1999.9 mV | 0 to 100°C |
| ✓ ACCURACY | 0.01pH | 0.1 mV | 0.1°C |
| ✓ TEMP. COMPENSATION | $\pm 0.01 \text{ pH} \pm 1 \text{ digit}$ | $\pm 0.1 \text{ mV}$ | $\pm 0.1 \text{ °C}$ |
| ✓ CALIBRATION | -5 to 110 °C | | |
| ✓ AUTO BUFFER | Auto/Manual | | |
| ✓ READ OUT | 4.00, 7.00 & 9.20 pH | | |
| ✓ STORAGE | 128 x 64 dots Graphical LCD Display | | |
| ✓ PC ATTACHMENT | Up to 1000 Samples | | |
| ✓ KEY BOARD | Through USB | | |
| ✓ POWER | 5 Keys Soft Touch Membrane Type | | |
| ✓ WEIGHT | 230 $\pm 10\%$ AC | | |
| | 0.8 Kg. (Approx.) | | |

Registered with :



MICROPROCESSOR pH METER

(5 Point Calibration)

CAL-023



TECHNICAL SPECIFICATIONS

PARAMETER	pH	mV	Temp°C
✓ RANGE	0.00 to 14.00 pH	0 to 1999.9 mV	0 to 100°C
✓ RESOLUTION	0.01pH	0.1 mV	0.1°C
✓ ACCURACY	±0.01 pH ±1 digit	±0.1mV	±0.1°C
✓ TEMP. COMPENSATION	-5 to 110 °C		
✓ CALIBRATION	Auto/Manual		
✓ AUTO BUFFER	4.00, 7.00 & 9.20 pH		



RECOGNITION

✓ READ OUT	16X2 LCD Display
✓ STORAGE	Up to 1000 Samples
✓ PC ATTACHMENT	Through USB
✓ KEY BOARD	8 Keys Soft Touch Membrane Type
✓ POWER	230±10% AC
✓ WEIGHT	0.8 Kg. (Approx.)

DIGITAL PH METERS

CAL-024/025



TECHNICAL SPECIFICATIONS

PARAMETER	pH	mV
✓ RANGE	0 to 14.00 pH	0 to ±1999 mV
✓ RESOLUTION	0.01 pH	1 mV
✓ ACCURACY	± 0.01 pH	± 1 mV
✓ DISPLAY	3½ Digit LED	
✓ TEMP. COMPENSATION	Manual : 0 to 100 °C (ATC in Model LT - 10)	
✓ INPUT IMPEDANCE	> 10 ¹² ohms	
✓ SLOPE CONTROL	80 to 120%	
✓ RECORDER OUTPUT	0 to 10 mV/pH Adjustable 0 to 10 mV/100 mV Adjustable	
✓ POWER	230 V ± 10% AC, 50Hz	
✓ DIMENSIONS	275 x 175 x 76 mm (L x B x H)	
✓ SENSOR	Combined pH Electrode	



ACCESSORIES

- ✓ Combination pH Electrode
- ✓ Buffer Tablets 4 pH & 7 pH
- ✓ Operation Manual
- ✓ Buffer Bottles (4 pH & 7 pH)
- ✓ Dust Cover
- ✓ Temperature Probe (in Model LT - 10)
- ✓ Electrode Stand



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

MICROPROCESSOR COND-TDS-SAL METER

CAL-026



SALIENT FEATURES

- ✓ 128x64 dots Graphical LCD Display
- ✓ EC, TDS, Salinity & Temperature Measurements
- ✓ Auto Temperature Compensation
- ✓ Auto Ranging Facility
- ✓ Programmable Ref. Temp & Temp. Coeff in EC Mode
- ✓ 1000 Samples Storage Facility
- ✓ Printer Attachment Facility



TECHNICAL SPECIFICATIONS

PARAMETER	EC	TDS	SALINITY	TEMP.
✓ RANGE SEL.	Automatic	Automatic	Automatic	—
✓ RANGE	0-20, 0-200 S 0-2, 0-20, 0-200mS	0-2, 0-20, 0-200ppm 0-20, 0-200 ppt	0-20, 0-200ppm 0-2, 0-20, 0-50ppt	0-100°C
✓ ACCURACY	± 0.5%FS±1Digit	±0.5%FS±1Digit	±1% FS± 1Digit	± 0.1°C
✓ RESOLUTION	0.01 S	0.01 ppm 0.01 ppm	0.1°C	
✓ CELL CONST	Adjustable (0.05-9.99)	Adjustable (0.05-9.99)	Adjustable (0.05-9.99)	----
✓ TEMP. COMP	Auto/Manual 0-50°C	Auto/Manual 0-50°C	Auto/Manual 0-50°C	----
✓ TEMP. COEFF.	Adjustable (0.1 - 4.0%)	Adjustable (0.1 - 4.0%)	Adjustable (0.1 - 4.0%)	
✓ READOUT	128x64 dots Graphical LCD Display			
✓ KEY BOARD	5 Soft touch membrane type keys			
✓ PRINTER	USB Interface			
✓ STORAGE	Up to 1000 Samples			
✓ POWER	230V ± 10% AC			
✓ ACCESSORIES	Cond./TDS/Salinity Cell, Temperature Probe, Electrode Stand, Mains Lead, Dust Cover, Instruction Manual			

DIGITAL CONDUCTIVITY METERS

CAL-027/030



TECHNICAL SPECIFICATIONS

✓ DISPLAY	3½ Digit LED
✓ MEASUREMENT	Conductivity
✓ COND. RANGES	Five Ranges
✓ RANGE SELECTION	Automatic in 5 Ranges
✓ TEMP. RANGE	-5 to 110°C
✓ ACCURACY	
COND.	±0.5 % FS ± 1Digit
TEMP.	±0.1°C ± 1Digit
✓ TEMPERATURE COMPENSATION	Auto: 0 to 50 °C (in Model CAL-030 Only) Manual: 0 to 50 °C in (Model CAL-027)
✓ CELL CONSTANT	Adjustable on Digital Display
✓ MEASURING CELL	Platinum DIP Type
✓ CELL CONST. MEASUREMENT	Auto
✓ POWER	230V± 10% AC
✓ DIMENSIONS	270x202x80 mm (lxbxh)
✓ WEIGHT	0.8 Kg approx.
✓ ACCESSORIES	Conductivity Cell, Operation Manual, Dust Cover, Cell Stand, Temperature Probe (with models LT-26)

Registered with :



DIGITAL PH-COND. CUM TEMPERATURE METER

CAL-028/029



TECHNICAL SPECIFICATIONS

pH MEASUREMENTS

- ✓ pH 0 to 14 pH
- ✓ Resolution 0.01 pH
- ✓ Accuracy $\pm 0.01 \text{ pH} \pm 1 \text{ digit}$

CONDUCTIVITY METER

- ✓ Range 0 to 2 & 20mMhos/cm
- ✓ Accuracy $0.5\% \pm 1 \text{ digit}$

TEMPERATURE MEASUREMENT

- ✓ Range $0^\circ \text{ to } 100^\circ \text{C}$
- ✓ Resolution 0.1°C
- ✓ Accuracy $0.2\% \pm 1 \text{ digit}$

GENERAL SPECIFICATIONS

- ✓ Display $3\frac{1}{2}$ digit LED display with automatic polarity & decimal point indication.
- ✓ Power $230 \text{ V} \pm 10\% \text{ AC } 50 \text{ Hz}$
- ✓ Dimension $75 \times 275 \times 175 \text{ mm}$
- ✓ Weight $2\frac{1}{2} \text{ Kgs. (Approx.)}$

DIGITAL TDS METER

CAL-031



TECHNICAL SPECIFICATIONS

- ✓ DISPLAY $3\frac{1}{2}$ Digit LED
- ✓ MEASUREMENT Conductivity
- ✓ COND. RANGES Five Ranges
- ✓ RANGE SELECTION Automatic in 5 Ranges
- ✓ TEMP. RANGE $-5 \text{ to } 110^\circ \text{C}$

- ✓ ACCURACY
 - COND. $\pm 0.5\% \text{ FS} \pm 1 \text{ Digit}$
 - TEMP. $\pm 0.1^\circ \text{C} \pm 1 \text{ Digit}$
- ✓ TEMPERATURE COMPENSATION
 - Auto: $0 \text{ to } 50^\circ \text{C}$
 - Manual: $0 \text{ to } 50^\circ \text{C}$

- ✓ CELL CONSTANT Adjustable on Digital Display
- ✓ MEASURING CELL Platinum DIP Type
- ✓ CELL CONST. Auto

- ✓ POWER $230 \text{ V} \pm 10\% \text{ AC}$
- ✓ DIMENSIONS $270 \times 202 \times 80 \text{ mm (lxbxh)}$
- ✓ WEIGHT 0.8 Kg approx.
- ✓ ACCESSORIES Conductivity Cell, Operation Manual, Dust Cover, Cell Stand,



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

MICROPROCESSOR BASED PHOTO COLORIMETER

CAL-032



ACCESSORIES

- ✓ Glass test tubes 5 Nos.
- ✓ Instruments cover 1 Nos.
- ✓ Operating Manual 1 Nos.
- ✓ Spare Lamp 1 Nos. (Fitted inside)



TECHNICAL SPECIFICATIONS

pH MEASUREMENTS

DISPLAY
DISPLAY MODES

3 DIGIT RED LED DISPLAY.
% T, O.D. AND 3
CONCENTRATION MODES
C1,C2,C3

ZERO ADJUSTMENT
ACCURACY
STABILITY
LIGHT SOURCE
AMPLIFIER
MEMORY

AUTOMATIC (WITHOUT KNOB ROTATION)
 ± 0.02 O.D.
 ± 0.02 O.D. PER HOUR.
6.8 VOLT , 0.3 AMP TUNGSTEN LAMP/LED
MICRO CONTROLLER BASED.
IN BUILT MEMEORY TO RETAIN
LAST "K" FACTOR FOR
CONCENTRATION EVEN AFTER
POWER LOSS.

SAMPLE VOLUME
POWER SUPPLY

1 ML. MINIMUM.
230 V $\pm$ 10 %, 50 Hz.

DIGITAL FULLY AUTOMATIC COLORIMETER

CAL-033



TECHNICAL SPECIFICATIONS

- ✓ Range 400-700nm
- ✓ Display Dual Digital Display
- ✓ Filters Built-in 9 Digital filters >30000 Hours Life
- ✓ Filters Wavelength 400nm, 430nm, 500nm, 520nm, 540nm, 580nm, 600nm, 620nm, 680nm
- ✓ Display Mode Absorbance & Wavelength
- ✓ Detector Silicon photo diode
- ✓ Zero Adjustment Auto zero by microprocessor
- ✓ Accuracy ± 0.01 O.D.
- ✓ Stability ± 0.02 O.D. Per Hour
- ✓ Light Source Highly Accurate Laser Source
- ✓ Amplifier Micro Controller Based
- ✓ Volume 1 ml. Minimum
- ✓ Dimension L 210 X B 160 X H 80 mm (Approx)
- ✓ Weight 1.5 Kgs. (Approx)
- ✓ Power 230V $\pm$ 10% AC, 50 Hz,
- ✓ Battery Backup 6V Ni-Cd Re-Chargeable Battery
- ✓ Accessories Set of Test Tube - 6 Nos. Dust Cover - 1 No. Operational Manual

Registered with :



DIGITAL PHOTO COLORIMETER (Auto Zero)

CAL-034



TECHNICAL SPECIFICATIONS

Accuracy	± 0.02 O.D.
Reproducibility	± 0.01 O.D.
Stability	± 0.02 O.D per hour
Light Source	6.8V, 0.3amp Tungsten Lamp/LED
Key Board	1 Soft touch Key
Amplifier	I.C. Based
Detector	Selenium photocell/Photodiode
Warm-up Time	5 Minutes.
Sample System Tubes	10 mm dia matched glass test
Power source	230V ₋ + 10 % 50Hz.AC.

ACCESSORIES

Glass test tubes	:	05 Nos.
Instruments cover	:	1 Nos.
Operating Manual	:	1 Nos.
Spare Lamp	:	1 Nos. (Fitted inside)



DELUXE PHOTO COLORIMETER (Inbuilt Battery)

CAL-035



TECHNICAL SPECIFICATIONS

✓ Accuracy	± 0.02 O.D.
✓ Reproducibility	± 0.01 O.D.
✓ Stability	± 0.02 O.D per hour
✓ Light Source	6.8V, 0.3amp Tungsten Lamp/LED
✓ Key Board	Potentiometer adjustment
✓ Amplifier	I.C. Based
✓ Detector	Selenium photocell/Photodiode
✓ Warm-up Time	5 Minutes.
✓ Sample System Tubes	10 mm dia matched glass test
✓ Power source	230V ₋ + 10 % 50Hz.AC.

ACCESSORIES

Glass test tubes	:	05 Nos.
Instruments cover	:	1 Nos.
Operating Manual	:	1 Nos.
Spare Lamp	:	1 Nos. (Fitted inside)



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DIGITAL PHOTO COLORIMETER

CAL-036



TECHNICAL SPECIFICATIONS

✓ Accuracy	± 0.02 O.D.
✓ Reproducibility	± 0.01 O.D.
✓ Stability	± 0.02 O.D per hour
✓ Light Source	6.8V, 0.3amp Tungsten Lamp/LED
✓ Key Board	Potentiometer adjustment
✓ Amplifier	I.C. Based
✓ Detector	Selenium photocell/Photodiode
✓ Warm-up Time	5 Minutes.
✓ Sample System Tubes	10 mm dia matched glass test
✓ Power source	230V ± 10 % 50Hz.AC.

ACCESSORIES

Glass test tubes	05 Nos.
Instruments cover	1 Nos.
Operating Manual	1 Nos.
Spare Lamp	1 Nos. (Fitted inside)

DIGITAL DRY BATH INCUBATOR

CAL-037



TECHNICAL SPECIFICATIONS

✓ Product	Dry bath incubator.
✓ Temperature Range	Ambient $+5$ to 70° C
✓ Temperature Accuracy	$\pm 1^{\circ}$ C
✓ Timer range	1 to 99 minutes.
✓ Temp. Sensor	PT100
✓ Temp. Controller	PID
✓ Display	16 x 2 alpha-numeric display
✓ Block size	24 x 12 mm Tube holders.
✓ Block Material	Rock solid aluminium block.
✓ Power Supply	230 volt $+10$ % AC.

SALIENT FEATURES

- ✓ Highly Stable & Accurate
- ✓ Overheat Protection
- ✓ Available with Buzzer Alarm

Registered with :



MICROPROCESSOR HAEMOGLOBIN METER (Auto Zero)

CAL-038



TECHNICAL SPECIFICATIONS

- ✓ DISPLAY 3 DIGIT RED LED DISPLAY.
- ✓ DISPLAY MODES % T, O.D. AND 3 CONCENTRATION MODES C1, C2, C3
- ✓ ZERO ADJUSTMENT AUTOMATIC (WITHOUT KNOB ROTATION)
- ✓ ACCURACY ± 0.02 O.D.
- ✓ STABILITY ± 0.02 O.D. PER HOUR.
- ✓ LIGHT SOURCE 6.8 VOLT, 0.3 AMP TUNGSTEN LAMP.
- ✓ AMPLIFIER MICRO CONTROLLER BASED.
- ✓ MEMORY IN BUILT MEMEORY TO RETAIN LAST "K" FACTOR FOR CONCENTRATION EVEN AFTER POWER LOSS.
- ✓ SAMPLE VOLUME 1 ML. MINIMUM.
- ✓ POWER SUPPLY 230 V $\pm 10\%$, 50 Hz.



ACCESSORIES

- ✓ Glass test tubes 5 Nos.
- ✓ Instruments cover 1 Nos.
- ✓ Operating Manual 1 Nos.
- ✓ Spare Lamp 1 Nos. (Fitted inside)

PORTABLE HAEMOGLOBIN METER

CAL-039



Portable and high performance digital hemoglobin meter is requires fully automated process. This provides easy, fast & very accurate monitoring of haemoglobin. In this the adjustment or calibration is not needed and ensures to provide results within 15 seconds.

TECHNICAL SPECIFICATIONS

- ✓ 10 Testing Strips
- ✓ Measuring range: 5-25 gm/dl
- ✓ Memory: 1000 test results
- ✓ Auto calibration

ACCESSORIES

- ✓ HB Meter
- ✓ Canister of Test Strips
- ✓ Code Chip
- ✓ Control chip
- ✓ Capillary Trasfer Tube/Dropper
- ✓ Lancing Device
- ✓ Sterile Lancets
- ✓ AAA Batteries



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DIGITAL POTENTIOMETER (With inbuilt Stirrer)

CAL-040



TECHNICAL SPECIFICATIONS

✓ READOUT	3½ digit bright red LED display
✓ RANGE	0 to ± 1999 mV
✓ RESOLUTION	1 mV
✓ ACCURACY	± 1 mV ± 1 digit
✓ OPERATING TEMPERATURE	10°C to 50°C
✓ INBUILT STIRRER	Available
✓ POWER SUPPLY	230V $\pm 10\%$ AC, 50 Hz
✓ DIMENSIONS	270 x 248 x 101 mm (LxBxH)
✓ WEIGHT	2 kg.

SALIENT FEATURE

- ✓ Inbuilt Stirrer
- ✓ 3½ Digit LED Display
- ✓ Highly Stable & Accurate
- ✓ Compact Design



ACCESSORIES

✓ Platinum Electrode	1 No
✓ Reference Electrode	1 No
✓ Dust Cover	1 No
✓ Electrode Stand	1 No
✓ Magnetic Capsule	1 No
✓ Titration Beaker	1 No
✓ Instruction Manual	1 No.

DIGITAL POTENTIOMETER

CAL-041



TECHNICAL SPECIFICATIONS

✓ RANGE	0 to ± 1999 mV
✓ RESOLUTION	1 mV
✓ ACCURACY	± 1 mV
✓ INPUT IMPEDANCE	$> 10^{12}$ Ohms
✓ OPERATING TEMPERATURE	100C to 450C
✓ DISPLAY	3½ Digit 0.5" seven segment LED display with auto polarity indication
✓ POWER	230V $\pm 10\%$ AC, 50 Hz.
✓ DIMENSIONS	275 x 190 x 78mm
✓ WEIGHT	2.5 Kg. (Approx.)
✓ STANDARD ACCESSORIES	Reference Electrode : 1 No. Glass Electrode : 1 No. Dust Cover : 1 No. Electrode Stand : 1 No.

SALIENT FEATURES

- ✓ Highly Stable & Accurate
- ✓ 3½ Digit LED Display
- ✓ Rugged & Economical
- ✓ Compact Design

Registered with :



MICROPROCESSOR TURBIDITY METER

CAL-044

TECHNICAL SPECIFICATIONS

pH MEASUREMENTS

- ✓ DISPLAY 16x2 LINES ALFA NUMERIC DISPLAY.
- ✓ RANGE TWO RANGES 0 TO 200.0 & 200 TO 1000 JTU/NTU
- ✓ ACCURACY $\pm 3\%$ OF FULL SCALE DEFLECTION IN 0-1000 JTU/NTU
- ✓ SAMPLE SYSTEM 30MM CLEAR GLASS CUVETTES
- ✓ LIGHT SOURCE 6.8 VOLT, 0.3 AMP TUNGSTEN LAMP.
- ✓ DETECTOR PHOTODIODE
- ✓ MEMORY IN BUILT MEMEORY TO RETAIN BOTH RANGE STANDARD SOULTION AND LAST SET VALUE EVEN AFTER POWER LOSS.
- ✓ CALIBRATION WITH FORMAZINE SOLUTION
- ✓ POWER SUPPLY 230 V $\pm 10\%$, 50 Hz.



ACCESSORIES

- ✓ CUVETTES 30 MM DIA. 1 SET
- ✓ OPERATION MANUAL 1 NO.
- ✓ DUST COVER 1 NO.

DIGITAL TURBIDITY METERS

CAL-042/043



TECHNICAL SPECIFICATIONS

Product

- | | | |
|-----------------|--|--|
| ✓ DISPLAY | Digital Turbidity Metter (LT-33) 3½ Digit LED | Digital Nephelometer (LT-34) 3½ Digit LED |
| ✓ DETECTOR | Photocell/ | Photodiode Photocell/Photodiode |
| ✓ RANGE | 0 to 1000 NTU in 2 ranges | 0 to 200 NTU in 2 ranges |
| ✓ RESOLUTION | 1 NTU | 0.1 NTU |
| ✓ ACCURACY | $\pm 3\%$ FS ± 1 digit | $\pm 2\%$ FS ± 1 digit |
| ✓ SAMPLE SYSTEM | 60 x 25mm Clear Glass Test Tube | |
| ✓ LIGHT SOURCE | LED | |
| ✓ POWER | 230V $\pm 10\%$, 50Hz. AC | |
| ✓ DIMENSIONS | 280 x 175 x 110 mm | |
| ✓ ACCESSORIES | • Test Tubes Set • Operation Manual • Dust Cover | |

SALIENT FEATURES

- ✓ Display - 3½ digit LED
- ✓ 30mm flat bottom Test Tube
- ✓ Range 0 - 1000 NTU (in Model 042)
- ✓ Ranges 0 - 200 NTU (in Model 043)
- ✓ Highly Stable & Accurate



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

MICROPROCESSOR D.O METER

CAL-045

TECHNICAL SPECIFICATIONS

D.o

- ✓ Range
- ✓ Resolution
- ✓ Temperature Comp.

0 To 20 Ppm
0.1 Ppm
Automatic With Pt 100
Probe & Manual With Keys
0 To 999 Mm Of Hg Manual
0 To 20 Gm/1 (manual)
Automatic
± 2 % + 1 Digit1

- ✓ Pressure Adjustment
- ✓ Salinity Correction
- ✓ Calibration
- ✓ Accuracy

Temperature

- ✓ Range
- ✓ Resolution
- ✓ Accuracy
- ✓ Input Type
- ✓ Calibration

-20.0 To +200 °c
0.1 °c
± 0.2 %
Pt 100
Manual

Display

- ✓ 16 Character 2 Lines Alphanumeric LCD

- ✓ Display Format
- ✓ Setting
- ✓ Storage
- ✓ Interface
- ✓ Real Time Display
- ✓ Power Supply
- ✓ Digital Output
- ✓ Print Format

Temp & Do Simultaneously
By Soft Touch Keys
1000 Samples With Date &time
USB
24 Hour Mode With Date
230 V ± 10% Ac 50 Hz
Serial Rs-232
All Data Date Wise



DIGITAL D.O METERS

CAL-046/047

TECHNICAL SPECIFICATIONS

DIGITAL D.O METER

- ✓ Range
- ✓ Temperature
- ✓ Resolution
- ✓ Accuracy
- ✓ Temp. Compensation
- ✓ Compensation
- ✓ D.O. Sensor

0 to 20.0 ppm
0 to 100 (in Model CAL-047)
0.1 ppm
0.1 ppm ± 1 count
0° C to 50° C Manual
± 3 %
Amperometric Gold/Silver membrane type.

GENERAL

- ✓ Display
- ✓ Power
- ✓ Weight

3 ½ digit LED display
230V A.C 50 HZ
2 Kg

STANDARD ACCESSORIES

- ✓ D O Electrode
- ✓ Instruction Manual
- ✓ D.O Membranes
- ✓ Temperature Probe

1 No.
1 No.
1 Set.
1 No. (in Model CAL-47)



Registered with :



MICROPROCESSOR KARL FISCHER MOISTURE TITRATOR

CAL-050



New

SALIENT FEATURES

- ✓ Microprocessor Based with Printer Interface
- ✓ User Friendly and Menu Driven Software.
- ✓ Direct Results in ppm, % and mg H₂O on single display screen
- ✓ Setup Data Storage Facility
- ✓ Sample Data Storage Facility
- ✓ 128 x 64 Graphical LCD
- ✓ Batch-Wise, Date-Wise and Individual Result Data Printing
- ✓ RS232/USB Interface (Optional)

ACCESSORIES

- Dual Platinum Electrode
- Teflon Coated Magnetic Stirring Capsule
- 250 ml Bottle for K.F Reagent
- 250 ml Bottle for Methanol
- 250 ml Bottle for Calcium Chloride
- Reagent Outer
- 25 µl Auto pipette
- Adapter for Calcium Chloride Bottle
- Adapter for K.F reagent Bottle
- Set of connecting tubes
- Set of dispensing tubes & nozzles
- Titration Vessel
- Power supply Adapter
- Rubber bellow
- Instruction Manual



TECHNICAL SPECIFICATIONS

- | | |
|-------------------------------------|--|
| ✓ Measuring Range | 10 ppm to 100 % of moisture |
| ✓ Measuring Method | Karl Fischer Volumetric Titration Method |
| ✓ K.F. Dispensing System | Highly sensitive motorized dispensing system |
| ✓ Resolution of Titrant Volume | 0.01 ml |
| ✓ Indication of Titrant Volume | 0.00 to 99.99 ml |
| ✓ Auto Moisture content Calculation | %0.00 to 100% ppm10 to 999999 mg
H ₂ O0.00 to 999.99 |
| ✓ Calibration | Auto K.F. Titer/Factor calculation |
| ✓ End Point Indication | Audio |
| ✓ Wait Time for End Point | Adjustable 1 to 99 seconds |
| ✓ Keypad | 20 keys |
| ✓ Display | 128 x 64 Graphical LCD |
| ✓ Storage | Sample result & setup data storage facility |
| ✓ Clock | In built clock with date & time display |
| ✓ Stirrer | In built magnetic stirrer with adjustable speed |
| ✓ Reagent Bottles | 250 ml bottles for KF Reagent, methanol & calcium chloride |
| ✓ Printer Interface | Dot matrix printer interface |
| ✓ Power Supply | 12V/2A DC Supply |



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

AUTO KARL FISCHER TITRIMETER

CAL-051



TECHNICAL SPECIFICATIONS

✓ DISPLAY	Array of 10 LEDS
✓ SAMPLE SIZE	1-50mg of H ₂ O
✓ INDICATION	RUN, ADD, END LED's
✓ KF FLOW	Auto Control Valve
✓ BURETTE	Auto Zero 10ml Burette
✓ TIMER	Adjustable Timer
✓ DISPENSING RESOLUTION	0.05ml
✓ MEASURING ELECTRODE	Dual Platinum KF Electrode
✓ POWER	230 V $\pm$ 10%, 50 Hz. AC

ACCESSORIES

- ✓ Auto Titration Control
- ✓ Auto Zero Burette
- ✓ Adjustable Timer
- ✓ Visual & Audible Alarm

MICROPROCESSOR COLONY COUNTERS

CAL-048/049



TECHNICAL SPECIFICATIONS

✓ DISPLAY	3 - Digit Seven Segment LED in Model CAL-048 4 - Digit Seven Segment LED in Model CAL-049
✓ MAX COUNT	999 in Model LT-36, 9999 in Model CAL-049
✓ KEYBOARD	6 soft touch membrane keys
✓ CORRECTION	Count correction facility available to cancel the unwanted counts
✓ STORAGE	125 Result-count storage retained even if the system is switched off
✓ AVERAGE	Average mode facility available
✓ DISH SIZE	110 mm
✓ MAGNIFICATION	x 1.7 surface magnification
✓ DIMENSIONS (L x B x H)	255 x 220 x 100 mm (Approx.)
✓ WEIGHT	3 Kg. (Approx.)
✓ POWER	230 V $\pm$ 10% AC, 50 Hz

SALIENT FEATURES

- ✓ Count Correction Facility
- ✓ Result-Count Storage
- ✓ Audible Confirmation of Each Count
- ✓ Auto Marker Pen
- ✓ Uniform Glare Free Illumination
- ✓ Wolffhugel Glass Grid with Focussing Facility
- ✓ LED Based Illumination

Registered with :



MICROPROCESSOR MELTING POINT APPARATUS

CAL-052



New

SALIENT FEATURES

- ✓ 128x64 Graphical LCD display with backlight
- ✓ Icon based navigation menu for ease of operation
- ✓ Selectable heating modes (slow, medium and Rapid)
- ✓ Storage up to 1000 results
- ✓ Quick Cooling with Integrated fans
- ✓ Audio and Visual Indicators for System Status
- ✓ Quick Cooling with integrated Fans

TECHNICAL SPECIFICATIONS

- ✓ No. of samples: 1 sample at a time
- ✓ Temperature Range: Ambient to 300°C
- ✓ Temperature Accuracy: + 10C at 20 0C, +2.50C at 2750C
- ✓ Temperature Sensor: Platinum Resistance PT100
- ✓ Selectable heating modes (Slow, Medium and Rapid)
- ✓ Display: 128x64 Graphical LCD Display
- ✓ No of keys: 4
- ✓ Memory: Storage upto 1000 results
- ✓ Power: 230 V AC +10%, 50 Hz

ACCESSORIES

- | | |
|-----------------|--------|
| ➤ Capillaries | 1 Box. |
| ➤ Cleaning Tool | 1 Nos. |
| ➤ USB Cable | 1 Nos. |
| ➤ Software CD | 1 Nos. |



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | <http://www.allinonetech.co.in>

AUTO MELTING POINT APPARATUS

CAL-053



TECHNICAL SPECIFICATIONS

✓ TEMPERATURE RANGE	Ambient to 3000C
✓ TEMPERATURE	± 10C at 200C
✓ ACCURACY	± 2.50C at 3000C
✓ TEMPERATURE SENSOR	Platinum Resistance PT 100
✓ RAMP RATE	Programmable at Scale of 1-10
✓ PLATEAU TEMPERATURE	Programmable
✓ DISPLAY	4 Digit seven segment LED Display
✓ DISPLAY RESOLUTION	1°C
✓ KEYBOARD	Soft Touch Membrane Keys
✓ STATUS LED'S	Plateau, °C, Ramp, Run, End, Ready &

ACCESSORIES

- ✓ Easy to Operate
- ✓ Programmable Plateau Temperature
- ✓ Programmable Ramp Rates
- ✓ 4 Digit Seven Segment LED Display
- ✓ Quick cooling with integrated fan
- ✓ Audio Visual Indicators for System Status

DIGITAL MELTING POINT APPARATUS

CAL-054



TECHNICAL SPECIFICATIONS

✓ DISPLAY	4 Digit Seven Segment LED display
✓ TEMPERATURE	0-300 OC
✓ RESOLUTION	1°C
✓ CAPILLARY GLASS TUBE	100mm long, 0.8 to 1.1mm internal diameter
✓ BOILING POINT	6x75mm Glass Tube
✓ SAMPLE SIZE	Fine powder properly dried at a temperature considerably below its melting point, 4 to 6 mm high
✓ OIL-BATH	Silicon oil bath beaker - 200 ml capacity with teflon cover fitted with oil immersion heater. It is having three holes for holding the capillaries, one for boiling point tube and one for thermometer
✓ STIRRER SPEED	Controllable with front knob
✓ POWER	230V ± 10% AC, 50 Hz
✓ WEIGHT	6 Kg. (Approx.)

ACCESSORIES

- ✓ Box of Capillaries
- ✓ Glass Tubes for Liquid Sample (6 x 75 mm) - 2 Nos.
- ✓ Magnetic Capsule
- ✓ Bottle of Silicon Oil - 250 ml
- ✓ Glass Cylindrical Beaker with Teflon cover fitted with immersion heater
- ✓ Instruction Manual, Dust Cover

Registered with :



DIGITAL FRIABILITY TEST APPARATUS

CAL-055/056



TECHNICAL SPECIFICATIONS

- ✓ Rotation Speed 25 ± 1
- ✓ Time Range 1 sec to 99 min 59 sec
- ✓ No Of Wheels Two (One in Model 056)
- ✓ Test Time Programmable Programmable
- ✓ Electric Motor Low rpm A.C. Motor
- ✓ Auto Removal of sample Yes
- ✓ Audio Alarm at completion Yes



ACCESSORIES

- ✓ Programmable Time With Digital Display
- ✓ Auto Stop After Completion Of Set Time With Alarm
- ✓ Auto Removal of Sample Without Opening the Drum
- ✓ Precise Control Of RPM 25 ± 1

DIGITAL DISINTEGRATION TEST APPARATUS

CAL-057/058



TECHNICAL SPECIFICATIONS

- ✓ Type of Heating Hot Plate
- ✓ Up-down Speed 30 ± 2 strokes/min
- ✓ Up-down Length 55 ± 5 mm
- ✓ Time Control Digital (Programmable from 1 sec to 99hr, 59min, 59 sec)
- ✓ Electric Motor Low rpm A.C. Motor
- ✓ No. of Basket Two (One in Model 057)
- ✓ Audio Alarm at completion Yes
- ✓ Hold & Resume Facility Yes

SALIENT FEATURES

- ✓ Programmable Time With Digital Display
- ✓ Auto Stop After Completion Of Set Time With Alarm
- ✓ Memory For Protection Of Running Test In Case Of Power Failure
- ✓ Separate Regulator for Control Of Heating
- ✓ Facility For Hold And Resume The Running Test For Inspection of Sample



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DIGITAL LEAK TEST APPARATUS

CAL-059



TECHNICAL SPECIFICATIONS

- ✓ Type GMP Model, In-built Test Unit
- ✓ Time Control & Range Digital, Programmable, 00.01 sec to 99min59sec
- ✓ Test Vacuum Range Adjustable up-to 650 mmHg
- ✓ Vacuum Display 2.5" SS Vacuum Gauge
- ✓ Vacuum Control & Release By Single Front Panel Knob
- ✓ Audio Alarm at completion Yes
- ✓ Vacuum Pump Oil free, MV 27" +- 5%, 1/4HP Motor
- ✓ Test Unit Size 200mm, 250mm & 300mm (any one)
(Specify in Order)




ACCESSORIES

- ✓ Programmable Time With Digital Display
- ✓ Auto Stop After Completion Of Set Time With Alarm
- ✓ Precise Control of Vacuum
- ✓ Heavy Duty Oil-free Vacuum Pump
- ✓ 1mm Thick SS-304 cabinet

DIGITAL MOISTURE BALANCE

CAL-060

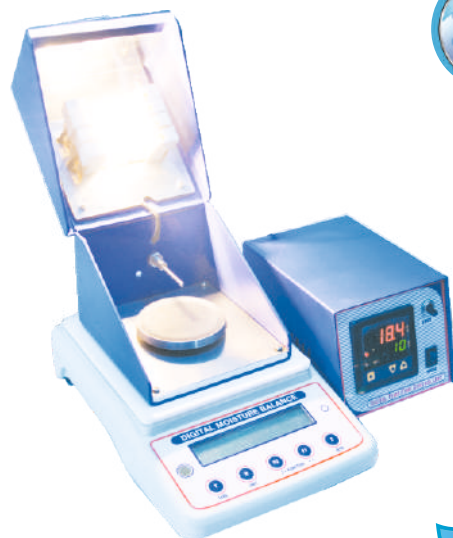

TECHNICAL SPECIFICATIONS

- ✓ Weighing Capacity & Readability 200gm, 0.001gm
- ✓ Moisture Readability 0.01% or 0.1% (Selectable)
- ✓ Display Of Moisture / weight Digital Large LCD
- ✓ Temperature Range & Readability Up-to 150 Degree, 0.1 Degree
- ✓ Temperature Display Digital, LED
- ✓ Audio Alarm at completion Yes
- ✓ Heating Time Programmable
- ✓ Heating Source Halogen Tube (300 Watt)
- ✓ Calibration of Balance Automatic with External weight (100gm)



SALIENT FEATURES

- ✓ Direct Display of Moisture in %
- ✓ No Need to Weigh Sample, Means Less Error
- ✓ Precise Control of Temperature
- ✓ Alarm At Completion of Test
- ✓ Suitable for Weighing with readability of 1mg

Registered with :



WATER & SOIL ANALYSIS KITS

PARAMETERS

	59	60	61	62
pH	✓	✓	✓	✓
Cond.	✓	✓	✓	✓
TDS	✓	✓	✓	✓
DO	✓	✓	✓	
mV (ORP)	✓		✓	✓
Salinity	✓	✓	✓	
Turbidity		✓		
Temp.	✓	✓	✓	✓

065



066/
067



068



069



ALTRONICS[®]
AN ISO 9001 CERTIFIED

Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

SPECIFICATIONS

Model	CAL-065	CAL-066/067	CAL-068	CAL-069
Product	µP Water & Soil Analysis Kit	Water & Soil Analysis Kit	Water & Soil Analysis Kit	Water & Soil Analysis Kit
Display	16 x 2 Characters LCD Display	3 ½ Digit LCD	3 ½ Digit LCD	3 ½ Digit LCD
pH				
Range	0 to 14 pH	0 to 14 pH	0 to 14 pH	0 to 14 pH
Resolution	0.01 pH	0.01 pH	0.01 pH	0.01 pH
Accuracy	0.01 ± 1 Digit	0.01 ± 1 Digit	0.01 ± 1 Digit	0.01 ± 1 Digit
Temp. Comp.	0 to 100°C(Auto/Manual)	0 to 100°C (Manual)	0 to 100°C (Manual)	0 to 100°C (Manual)
Conductivity (E C)				
Range	0-20, 0-200µS	0-200µS	0-20mS	0-20mS
	0-2, 0-20, 0-200mS	0-2, 0-20, 0-200mS	---	---
Resolution	0.01µS/cm	0.1µS	0.01mS (10µS)	0.01mS (10µS)
Range Selection	Automatic	Manual	---	---
Accuracy	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit
Cell Constant	Adjustable (0.05 to 10.5)	Adjustable (0.4 to 1.5)	Pre-Adjusted	Pre-Adjusted
Temp. Coefficient	Adjustable (0.4 to 4.0)	2%	2%	2%
Temp. Comp.	5-50° (Auto/Manual)	Adjustable from table	Adjustable from Table	Adjustable from Table
Reference Temp.	Selectable (5-50°C)	25°C	25°C	25°C
Temperature				
Range	0-100°C	0-100°C	0-100°C	0-100°C
Resolution	0.1°C	0.1°C	0.1°C	0.1°C
Accuracy	± 0.1°C ± 1 Digit	± 0.1°C ± 1 Digit	± 0.1°C ± 1 Digit	± 0.1°C ± 1 Digit
Sensor	Semi Conductor Type	Semi Conductor Type	Semi Conductor Type	Semi Conductor Type
TDS				
Range	0-20, 0-200ppm	0-200ppm	0-20 ppt	0-20 ppt
	0-2, 0-20, 0-200 ppt.	0-2, 0-20, 0-200 ppt.	---	---
Range Selection	Automatic	Manual	---	---
Resolution	0.01 ppm	0.1 ppm	0.01ppt	0.01ppt
Accuracy	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit
Cell Constant	Adjustable (0.05 to 10.5)	0.4 to 1.5 on display	Pre-Adjusted	Pre-Adjusted
DO				
Range	0-20 ppm	0-20 ppm	0-20 ppm	
Resolution	0.1 ppm	0.1 ppm	0.1 ppm	
Accuracy	0.1 ppm ± 1 Digit	0.1 ppm ± 1 Digit	0.5 ppm ± 1 Digit	
Temp. Comp.	Auto/Manual (5°C to 55°C)	Manual (5°C to 55°C)	Manual (5°C to 55°C)	
DO Sensor	Gold/Silver Probe	Gold/Silver Amperometric Probe	Gold/Silver Amperometric Probe	
mV (ORP)				
Range	0 to ± 1999.9 mV	0 to ± 1999 mV	---	---
Resolution	0.1 mV	1 mV	---	---
Accuracy	± 0.1 mV ± 1 digit	± 1 mV ± 1 digit	---	---
Turbidity				
Range	---	0-1000 JTU		
Resolution	---	1 JTU		
Accuracy	---	± 3% FS ± 1 Digit		
Sample System	---	30mm Clear Glass Tube		
Salinity				
Range	0-20,0-200ppm,0-2,0-20,0-50ppt	0 - 50 ppt	0 - 50 ppt	0 - 5 0 ppt
Resolution	0.01 ppm	0.1 ppt	0.1 ppt	0.1 ppt
Accuracy	± 1% of Range ± 1 Digit	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit	± 0.5% FS ± 1 Digit
Power Supply				
	6V Rechargeable Battery or 230V±10%AC, 50Hz	1.5Vx6Dry Cells or 230V±10%AC, 50Hz	1.5Vx6Dry Cells or 230V±10%AC, 50Hz	1.5Vx6Dry Cells or 230V±10%AC, 50Hz
Storage				
	1000 sample	---	---	---
Standard Accessories				
	pH Electrode, Cond./TDS/Salinity Cell, Temp. Probe, DO Probe, Dry Cell container (161), Main Lead, Operation Manual, Bottles for pH Solution & pH Tablets Bottles (161 & 191), Turbidity Test Tube Set (191)			

Registered with :



PORTABLE INSTRUMENTS

SPECIFICATIONS

MODEL NO.	CAL-061	CAL-062	CAL-064	CAL-063
RANGE	0 - 14 pH	0-1999 μ S, 0-19.99 mS	0-1999 ppm, 0-19.99 ppt	0 – 19.9 ppm
RESOLUTION	0.01 pH	1 μ S	1 ppm	0.1 ppm
IMPEDANCE	>10 ¹² ohms	-	-	-
SENSOR	Combination pH Electrode	Cond. Cell (Dip type)	TDS Cell (Dip type)	Amperometric DO Probe
BATTERY	9V DC	9V DC	9V DC	9V DC
ACCURACY	0.01pH	±1% FS	±1% FS	±2% FS
TEMP. COMP.	0 - 100°C (Manual)	-	-	5 to 55°C
DISPLAY	3½ digit LCD	3½ digit LCD	3½ digit LCD	3½ digit LCD
SIZE	180 x 85 x 30 mm	180 x 85 x 30 mm	180 x 85 x 30 mm	180 x 85 x 30 mm
WEIGHT	250 gm. (Approx)	250 gm. (Approx.)	250 gm. (Approx.)	250 gm. (Approx.)

061



062



063



064



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DIGITAL PHOTO FLUOROMETER

CAL-070



TECHNICAL SPECIFICATIONS

✓ FLUORO SENSITIVITY	Full scale deflection obtained with 1 ppm quinine sulphate in 0.1 N sulphuric acid (primary wavelength 360 nm)
✓ DISPLAY	3 digit 7 segment Red LED
✓ EXCITATION SOURCE	12V, 50 W Tungsten Halogen lamp
✓ SENSITIVITY RANGE	Adjustable in 4 ranges
✓ PRIMARY FILTERS	Corning 5840 and Corning 5113 mounted on holders
✓ SECONDARY FILTERS	Corning 4308, Corning 3486 and Corning 3385 mounted on holders
✓ DETECTOR	Highly sensitive wide range Photodiode / Photocell
✓ SAMPLE TEST TUBES	15 mm (D) x 80 mm (H)
✓ MINIMUM SAMPLE	4 ml
✓ POWER	230 V $\pm$ 10% AC, 50 Hz.
✓ WEIGHT	4.5 Kg (approximately)
✓ DIMENSIONS	260 x 335 x 160mm (LxBxH)

SALIENT FEATURES

- ✓ 3 Digit Seven Segment LED Display
- ✓ Covers Entire Visible Range
- ✓ Determines the Concentration of Fluorophores & Quinine

ACCESSORIES

➤ TEST TUBES	A Set of 5
➤ DUST COVER	1 No.
➤ INSTRUCTION MANUAL	1 No.
➤ PRIMARY AND SECONDARY FILTERS	A Set of 5



Registered with :



DIGITAL VISCOMETER

CAL-071



TECHNICAL SPECIFICATIONS

✓ Display	LCD
✓ Measurement Range	1 0- 1 x 1 0 (5) m Pa.s 10 m Pa.s- 1,00,000 mPa.s, 1 cPa.s = 10 mPa
✓ Spindle numbers	4 Spindles
✓ Rotor Speed (rpm)	6/ 1 2/30/60
✓ Accuracy	± 5% Newtonian Fluid
✓ Overall Dimensions	340mm x 420m m x 470m m
✓ Net Weight	9kg

ACCESSORIES

✓ ascending and falling rack	1 set
✓ protective frame of rotor	1 No.
✓ power adapter	1 No.
✓ rotors	(No.1,2,3,4 each)
✓ spanner	1 No.
✓ screw driver	1 No.
✓ socket	1 set

PCR THERMAL CYCLER

CAL-072



TECHNICAL SPECIFICATIONS

✓ Block capacity	64 x 0.2m1
✓ Temp range	4°C — 99°C
✓ Max Heating rate	< 2.5°C/s
✓ Max cooling rate	< 2.5°C/s
✓ Temperature display accuracy	0.1 °C
✓ Accuracy	< ± 2.5°C/s
✓ Temperature fluctuation	< ± 0.1 °C
✓ Uniformity	95 °C h < ± 0.5 °C (20 seconds later) 20 °C — 72 °C h < ± 0.3 °C (20 Seconds Later)
✓ Max program unit	9
✓ Max Cycle steps	9
✓ Max Cycle No	99
✓ Max Constant temperature	59m59s
✓ Stored program No	99h59m
✓ Stored program No	100
✓ Dimensions	370mm (L) x 249mm (W) x 180mm (H)
✓ Weight	5 kg

ACCESSORIES

- ✓ Adjustable pressure hot lid,
 - ✓ Heat lid with pressure alarm device,
 - ✓ Convenient and flexible module
 - ✓ Innovative module wire socket design achieves module replacement without wire.
 - ✓ The unique left-right design for amplification area and operating area.
 - ✓ Coloured and Wide Screen displaying Multiple details.
- Perform 20000 times non-breakdown operation.



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

DIGITAL AUTOMATIC POLARIMETER

CAL-073



ACCESSORIES

- ✓ Sample tubes 100mm, 200mm
- ✓ Software kit: RS232 cable, software CD
- ✓ Main lead
- ✓ Fuse
- ✓ Instruction manual.



TECHNICAL SPECIFICATIONS

✓ Test modes	optical rotation, sugar degree
✓ Light source	LED
✓ Wavelength	589.44nm
✓ Measurement	$\pm 45^\circ$ (optical rotation) $\pm 120^\circ Z$ (sugar)
✓ Minimum indicating value	0.001° (optical rotation) 0.01° Z (sugar)
✓ Accuracy	$\pm (0.01 + \text{measurement value} \times 0.05\%)^\circ Z$ (optical rotation) $\pm (0.03 + \text{measurement value} \times 0.05\%)^\circ Z$ (sugar)
✓ Repeatability	<0.002° (optical rotation)
✓ Display	LCD
✓ Test tube	200mm, 100mm
✓ Sample transmittance	>1%
✓ Interface	Rs232
✓ Operation voltage	220 $\pm$ 22v, 50Hz
✓ Overall dimensions	730mm X 480mm X 470mm
✓ Weight (gross)	36kgs
✓ Software	Yes

DIGITAL AUTOMATIC POLARIMETER

CAL-074



SALIENT FEATURES

- ✓ Micro processor Based
- ✓ User Friendly and menu driven software
- ✓ 128 x 64 Graphical LCD
- ✓ Two point calibration.
- ✓ USB Interface
- ✓ USB Port for interfacing the system with PC.
- ✓ One can see the stored logs on the system before printing
- ✓ Internal storage capacity of 1000 logs with date and time



TECHNICAL SPECIFICATIONS

✓ Measuring Range	$\pm 200^\circ$ (Sugar Scale) $\pm 70^\circ$ (optical rotation)
✓ Accuracy	$\pm 1^\circ$ (Full Scale)
✓ Resolution	0.01°
✓ Display	Graphical LCD (128 x 64)
✓ Keys	4-Keys for Menu Operation
✓ Calibration Mode	2 Point (zero & span)
✓ Interface	USB
✓ RTC	In-built clock with date and time display
✓ Data Storage capacity	1000 Logs with Date & Time
✓ Power Supply	230VAC $\pm 10\%$, 50Hz

Registered with :



MICROPLATE ELISA READER

CAL-075



TECHNICAL SPECIFICATIONS

✓ Calculation mode	Line , Interpolation, Liner Regression, Semi-Logarithm, Logarith, Logit- log, Quadratic
✓ Reading System	8 independent Photometric Channel.
✓ Interface Filters	4 precision filters 405nm, 450nm, 492nm, 630nm. Or optional (max 10 Filters, 400-800nm)
✓ Linear range	0.000-4.000A
✓ Linearity	±1.0%
✓ Accuracy	±0.01A
✓ Reproducibility of analysis	CV<0.5%
✓ Microplate reading speed	monochromatic 5S and bichromatic 10S
✓ Quality control function	QC data and curve available
✓ Measurement	430nm×340nm×177nm
✓ Weight	8.1Kg

ULTRASONIC CLEANERS

CAL-076/077



TECHNICAL SPECIFICATIONS

✓ Ultrasonic Frequency	40,000 Hz
✓ Material	Stainless Steel SUS304
✓ Tank Capacity	2.0L, 3.5L & 4.5L
✓ Timer	1 -30minutes,
✓ Digital timer	Power Supply AC 100 — 120V, 50 / 60Hz AC 220 — 240V, 50 / 60 Hz
✓ Ultrasonic Power	240W
✓ Heating Power	200 W, Digital Heating
✓ Unit Size	325 x 265 x 280 mm (LxWx H)
✓ Tank Size	300 x 240 x 150 mm (L xW x H)
✓ Package Size	430 x 365 x 420 mm (LxWx H)
✓ N.W.	6.0 kg
✓ G .VV.	7.0 kg

ACCESSORIES

- ✓ Stainless steel tank has resistance to wear and long work life.
- ✓ With digital timer & heater control.
- ✓ With Stainless steel basket
- ✓ Use just tap water, or industrial alcohol and solvent cleaner for more higher cleaning requirement
- ✓ Industrial control chip micro controller flexible circuit boards control
- ✓ More secure & stable
- ✓ Temperature tunable from 20°C to 80°C.



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

BIO-NANO SPECTROPHOTOMETER

CAL-078



TECHNICAL SPECIFICATIONS

Minimum Sample Size	0.5ul-2ul (2ul advised)
Path Length	0.2mm or 1mm
Light Source / Life	Xenon flash lamp / > 109 flashes
Detector Type	3864 element linear silicon CCD array
Wavelength Range	200-800nm
Wavelength Accuracy	±1 nm (TWHM at Hg 253.7nm)
Spectral Resolution	≤3nm (FWHM@Hg 253.7nm)
Absorbance Precision	0.003Abs (1mm path length)
Absorbance Accuracy	±1% (7.332Abs, at 260nm wavelength)
Absorbance Range	0.04 - 90 (at 260 wavelength, 10mm equivalent)
Detection Concentration Range	2ng/ul dsDNA ~ 4,500ng/ul dsDNA
Detection Time	<10s
Input Voltage	DC24V 2A
Power	20W
Dimension (W×D×H)	200×250×166mm

ACCESSORIES

✓ Micro Spectrophotometer	1Pc
✓ Setup CD	1Pc
✓ Adapter	1Pc
✓ USB Cable	1Pc
✓ Operation manual	1Pc



AUTOMATIC BOMB CALORIMETER

CAL-079



SALIENT FEATURES

- ✓ Automatic measurement & mathematical calculation
- ✓ USB interface for sending data to PC.
- ✓ Full test report print out by inbuilt thermal printer.
- ✓ Weight of sample, water equivalent & sensitivity can be set through keypad on single page.
- ✓ Automatic detection of temperature rise & fall.



TECHNICAL SPECIFICATIONS

✓ Display	128 x 64 Graphical LCD
✓ Keypad	20 keys
✓ Temperature Resolution	0.01°C
✓ Internal Memory	1000 logs with date and time
✓ Interface	USB interface to PC
✓ Printer	Inbuilt thermal printer
✓ Time Clock	Real time clock with battery backup
✓ Power supply	230V± 10%/50Hz

Standard Accessories

✓ Steel drum	Safety valve for high pressure
✓ Bomb with sample holder	Oxygen pressure gauge
✓ Stirrer	Benzoic acid powder
✓ Temperature probe	USB lead
✓ Chrome wire	Toll kit
✓ Pallet press	Operation manual
✓ Cotton thread	Power supply cable (Main lead)

Registered with :



HPLC SYSTEM

CAL-080



SALIENT FEATURES

- ✓ Self-priming pump head requires no manual priming
- ✓ Patented "Floating Pump Seal" designed for extended seal wear
- ✓ Available with micro, analytical, semi-prep, and prep pump heads
- ✓ Programmable solvent compressibility compensation
- ✓ Easy maintenance and service for all wetted parts
- ✓ Integral prime/purge assembly for quick solvent change

ACCESSORIES

- Rheodyne Injector 7725 i (USA)
- Micro Syringe
- Column C-18
- Software CD
- Filters



SPECIFICATIONS (PUMP)

- ✓ Flow Range 0.001 — 9.999 ml/min
- ✓ Delivery method Double piston (Main & Auxiliary)
- ✓ Pump head 10ml SST/Peek analytical
- ✓ Accuracy $\pm 1\%$ or $\pm 2\mu\text{L}/\text{min}$, whichever is greater $\pm 1\%$ or $\pm 1\mu\text{L}/\text{min}$, whichever is greater (Micro)
- ✓ Flow rate settings 0 - 0.10 mL/min. 0.001 inc.
0.10 - 0.90 mL/min 0.010 inc.
1.0 mL/min. + 0.10 inc
- ✓ Precision 0.25% from 0.1 mL/min. to 10 mL/min. at 20 deg C
0.25% from 0.05 mL/min. to 4 mL/min. at 20 degrees C (Micro)
- ✓ Pmax 6000psi
- ✓ System connections 1/16" capillaries
- ✓ Dimensions 410mm x 180mm x 270mm
- ✓ Weight 7.3kgs
- ✓ Power input 85 to 264 VAC, 47 to 63 Hz, 60 Watts
- ✓ Display 320mm
- ✓ Control Stand alone mode using front panel

SPECIFICATIONS (UV DETECTOR)

- ✓ Wavelength 190-700 nm
- ✓ Spectral bandwidth 6 nm
- ✓ Wavelength Accuracy ± 1 nm
- ✓ Wavelength Reproducibility ± 0.5 nm
- ✓ Flow pool volume 10 μL
- ✓ Optical path 10 mm
- ✓ Dynamic Noise $\leq 2.5 \times 10^{-5}$ AU (Methanol, 1ml/min, 254nm)
- ✓ Static Noise $\leq \pm 1 < 10^{-5}$ AU (Empty pool, Response time 1 s)
- ✓ Dynamic Drifting $\leq \pm 2.5 \times 10^{-4}$ AU (Methanol, 1ml/min, 254nm)
- ✓ Static Drifting $\leq \pm 1 \times 10^{-4}$ AU (Empty pool, Response time 1 s)
- ✓ Qualitative repeatability RSD $\leq 0.1\%$
- ✓ Quantitative repeatability RSD $\leq 0.5\%$
- ✓ Dimensions 160H x 260W x 350 D, (mm)
- ✓ Weight 6kg
- ✓ Minimum detection concentration $\leq 1 \times 10^{-8}$ g/mL (Naphthalene/methanol solution)



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>

AUTOMATIC HEMATOLOGY ANALYZER

CAL-081



TECHNICAL SPECIFICATIONS

- ✓ Principle Impedance for cell counting Cyanide-free method for HGB
- ✓ Parameters WBC, Neu#, Lym#, Mid#, Neu%, Lym%, Mid%, RBC, HGB, HCT, MCV, MCH, MCHC, RDW-SD, RDW-CV, PLT, MPV, PDW, PCT, P-LCR
- ✓ Histograms WBC, RBC, PLT histogram
- ✓ Languages English, Spanish, Italian, Portuguese, etc.
- ✓ Calibration Manual and Auto-calibration
- ✓ Quality control 3 level QC, LJ graph
- ✓ Sample volume Venous mode: 10iL venous blood Capillary mode: 10iL capillary blood Prediluted mode: 20iL capillary blood
- ✓ Display 8-inch color touch screen Liquid Crystal Display (LCD)
- ✓ Resolution 800 600
- ✓ Storage 100,000 sample results with histograms
- ✓ Reagent Lyse(500mL) and Diluent(20L)
- ✓ Printout Thermal printer, support external printer
- ✓ Temperature 18 - 35°C
- ✓ Power AC 100-240V, 50/60±1Hz
- ✓ Dimension 410mm×435mm×472mm

MEASUREMENT RANGE

Parameters	Measurement range
WBC	(0-99.9×10 ⁹)/L
RBC	(0-9.99×10 ¹²)/L
HGB	(0-300.0)g/L
PLT	(0-999×10 ⁹)/L



SALIENT FEATURES

- ✓ Throughput: 35T/H 8-inch touch screen 20 parameters + 3 histograms
- Sample volume: 10 µL
- ✓ Reagents only
- ✓ Counting modes
- ✓ 100,000 sample results
- ✓ Support LIS and external printer
- ✓ CE marked

PERFORMANCE

PARAMETERS	PRECISION (CV)
WBC	= 2.0% (7.0 - 15.0×10 ⁹) /L
RBC	= 1.9% (3.5 - 6.0×10 ¹²) /L
HGB	= 1.9% (110.0 - 180.0)g /L
MCV	= 0.4% (80.0 - 110.0) fL
LT	= 4.0% (100.0 - 500.0×10 ⁹)/L

Registered with :



BIO-CHEMISTRY ANALYZER

CAL-082



SALIENT FEATURES

- ✓ Highly Stable and accurate
- ✓ Absorbance Range upto 3.000
- ✓ Range Selection Automatic Via Filter Wheel
- ✓ Inbuilt Thermal Printer
- ✓ Up to 300 test parameters
- ✓ Storage of 2,00,000 test results with patient information

ACCESSORIES

- Printer Paper Roll
- Removable Cuvette
- Optical Mouse
- External Key Board
- AC Adapter



TECHNICAL SPECIFICATIONS

Test Method	End Point With Standard/Factor Two Point Kinetics (Fixed Time) Multipoint Kinetics Multi standard up to 8 standards Biochromatic, Dual Wavelength Absorbance Coagulation
Optical System	Principle: Photometric Analysis with Interference Filter Absorbance Range: 0.0000-3.0000 (Linearity: $\pm 1\%$, Repeatability: 0.001, Resolution: 0.0001) Spectral Range Selection: Automatic Via Filter Wheel Wavelengths: 340, 405, 450, 505, 546, 578, 630 nm + 2 Free Positions, ± 2 CML Precision Light Source: 6 V 10 W Long Life tungsten Halogen Lamp Detector: Photodiode
Thermal System	Peltier Regulated 25°C, 30°C, 37°C & Room Temperature Accuracy: $\pm 0.3^\circ\text{C}$
Cuvettes	Flow Cell: Quartz 32 μl Path Length: 10 mm Removable Cuvette (Square and round)
Printer	Inbuilt Thermal Printer (57mm) Optional External Printer
Display & Input System	7.0 inch color touch screen External Keyboard, Mouse facility
Suction System	Pressure Auto releasing Peristaltic Pump Suction Volume: 300 μl to 3.0 ml Air Column facility after each sample to avoid carry over.
Test Parameter, Storage & CPU	Test Parameters: Up to 300 2,00,000 test results with editable patient information Storage of Quality Control And standard results DDR2 SDRAM: 1 G bit Flash: 256 MB ARM Cortex A8, 720 Mhz
Quality Control	Lew-Jennings Chart Using Westgard's Rule Auto Drawing of QC figures
Operating Conditions	Temperature: 10°C~37°C Relative Humidity: <85%
Power Requirement	Voltage: 100-240 V AC (Auto Adaption) Frequency: 50/60 HZ
Dimensions	External Power Adaptor: 19 V 4.7 Amp Dimensions: 400X300X160 (L*W*H) Weight: 6 Kg



Mo.98255 38719 | 98255 83846 | 99780 76030

✉ morbi@allinonetech.co.in | 🌐 <http://www.allinonetech.co.in>



NEW ADDITIONS

- ✓ Double Beam Atomic Absorption Spectrophotometer
- ✓ High Resolution Microprocessor pH Meter
- ✓ Graphical Display Melting Point Apparatus
- ✓ Digital DT Apparatus
- ✓ Digital Leak Test Apparatus
- ✓ Digital Moisture Balance
- ✓ Blood Roller Mixer
- ✓ Differential Cell Counter
- ✓ Microprocessor Polarimeter
- ✓ Digital Potentiometer with inbuilt Stirrer

New

Registered with :



MSME
महान, लघु एवं माध्यम उद्योग
MICRO, SMALL & ENTERPRISES
CERTIFICATE NO. : GJ32E001121

एन एस आई सी
NSIC
The National Small Industries
Corporation Ltd
CERTIFICATE NO. : NSIC/GPNTG/2016/0027475



ISO 9001 : 2015
CERTIFICATE NO. : 16164601





ALL IN ONE TECHNOLOGY

REGD.OFFICE : GUEST HOUSE ROAD, NAGAR PLOT - I,
OPP RADIO CENTER, MORBI. TEL 02822 - 232211

FACT: PLOT NO.8, SHREE HARI ESTATE, VILLAGE: TIMBDI,
MORBI-363642 Mo.98255 38719 | 98255 83846 | 99780 7

✉ MORBI@ALLINONETECH.CO.IN | 🌐 [HTTP://WWW.ALLINONETECH.CO.IN](http://WWW.ALLINONETECH.CO.IN)

AUTHORIZED DEALER

Copyright ©