# Module-3 Detection and estimation

The key to analyzing and understanding the performance of digital transmission is the realization that signals used in communications can be expressed and visualized graphically. Geometric representation of signals with finite energy provides a mathematically elegant and highly insightful tool for the study of data transmission. Thus, we need to understand signal space concepts as applied to digital communications

5.1 Conceptual model of DigitalCommunication:
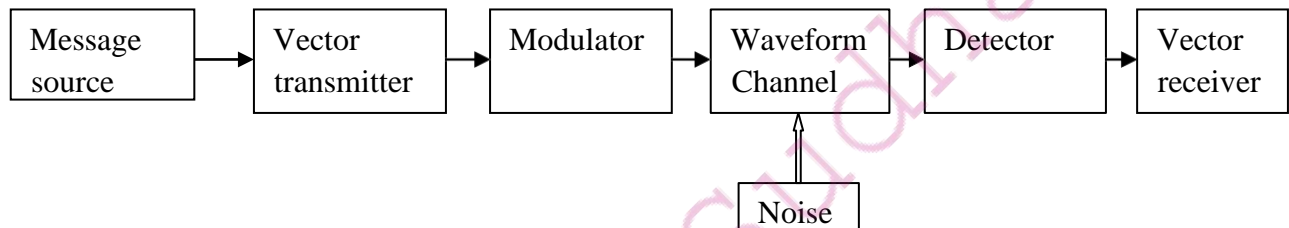
Fig(1) Digital Communication block diagram

A message source emits one symbol every T seconds, with the symbols belonging to an alphabet of M symbols denoted by $m_1, m_2, \ldots, m_M$

• A priori probabilities $p_1, p_2, \ldots, p_M$ specify the message source outputprobabilities.

• If the M symbols of the alphabet are equally likely, we may express the probability that symbol m, is emitted by the sourceas:

$P_i = P(m_i) = 1/M$ for i=1,2,3…M

The transmitter takes the message source output *m*, and codes it into a distinct signal $s_i(t)$ suitable for transmission over the channel.

• The signal $s_i(t)$ occupies the full duration T allotted to symbolm.

• Most important, $s_i(t)$ is a real-valued energy signal (i.e., a signal with finite energy), as shownby:

$$E_i = \int_0^T S_i^2(t)dt \quad i=1,2, \quad M$$

The channel is assumed to have two characteristics:

1. The channel is linear, with a bandwidth that is wide enough to accommodate the transmission of signal si(t) with negligible or nodistortion.

2. The channel noise, w(t), is the sample function of a zero‑mean white Gaussian noise process. We refer to such a channel as an additive white Gaussian noise (AWGN) channel. Accordingly, we may express the received signal x(t)as

$X(t)=S_i(t)+w(t)$ $0 \leq t \leq T$, $i = 1,,2,3...M$

The receiver has the task of observing the received signal x(t) for a duration of T seconds and making a best estimate of the transmitted signal s_i(t) or, equivalently, the symbol m_i. However, owing to the presence of channel noise, this decision-making process is statistical in nature, with the result that the receiver will make occasional errors.

• The requirement is therefore to design the receiver so as to minimize the average probability of symbol error, definedas:

$P_e = p(\hat{m} \neq m_i)$

5.2 Geometric Representation of Signals

The essence of geometric representation of signals is to represent any set of M energy signals $\{s_i(t)\}$ as linear combinations of N orthonormal basis functions, where $N \leq M$. That is to say, given a set of real-valued energy signals $s_1(t)$, $s_2(t)$, ..., $s_M(t)$, each of duration T seconds, we write

$$s_i(t) = \sum_{j=i}^{N} S_{ij}\phi_j(t), \qquad \begin{cases} 0 \leq t \leq T \\ i=1,2,... M \end{cases}$$

Where the coefficients of the expansion are defined by:

$$s_{ij} = \int_0^T s_i(t)\phi_j(t)dt \qquad \begin{cases} i=1,2,... M \\ j=`1,2,... N \end{cases}$$

The real-valued basis functions are orthonormal which means

$$s_{ij} = \int_0^T \phi_i(t)\phi_j(t)dt \qquad \begin{cases} 1 & if & i=j \\ 0 & if & i \neq j \end{cases}$$

The set of coefficients may naturally be viewed as an N-dimensional vector, denoted by S_i . The important point to note here isthat the vector $S_i$bearsa one to one relationship with the Transmittedsignal
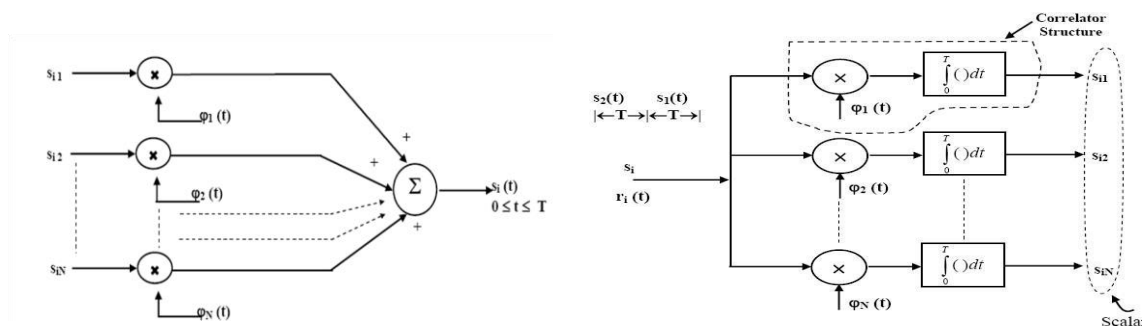
Fig(2) (a)Construction of signal from basis functions, (b) Getting coefficients from Basis functions

Signal Vector: We may state that each signal is completely determined by the vector of its coefficients

$$s_i = \begin{bmatrix} s_{i1} \\ s_{i2} \\ . \\ . \\ s_{iN} \end{bmatrix}, \qquad i=1,2, ...M$$

Signal Space: The N‑Dimensional Euclidean space constructed using basis functions as mutually perpendicular axis is called the signal space.

Length: In an N‑dimensional Euclidean space, it is customary to denote the length (also called the

absolute value or norm) of a signal vector s_i by thesymbol $\|s_i\|$

Squared‑Length: The squared‑length of any signal vector si is defined to be the **inner product** or **dot product of** s_i, with itself, as shown by:

$$\|s_i\|^2 = s_i^T s_i$$
$$= \sum_{j=1}^{N} s_{ij}^2, \quad i = 1, 2, \ldots, M$$

• The inner product of the signals $s_i(t)$ and $s_k(t)$ over the interval [0, T] is definedas:
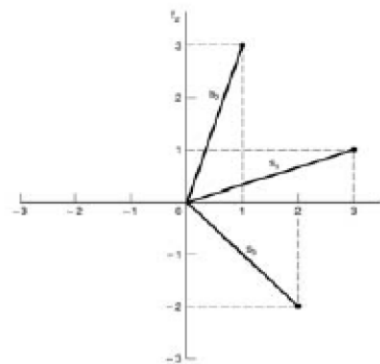
$$\int_0^T s_i(t)s_k(t)\, dt = s_i^T s_k$$

Squared Euclidean Distance:

$$\|s_i - s_k\|^2 = \sum_{j=1}^{N} (s_{ij} - s_{kj})^2$$
$$= \int_0^T (s_i(t) - s_k(t))^2 dt$$

Angle θ_{ik} between two signal vectors s_i and s_k

$$\cos \theta_{ik} = \frac{s_i^T s_k}{\|s_i\| \|s_k\|}$$

The two vectors s_i and s_k are **orthogonal** or **perpendicular** to each other if their inner product $s_i^T s_k$ is zero, in which case θ_{ik} = 90 degrees.

- -

5.3 Gram Schmidt Orthogonalizationprocedure:

As per G-S-O procedure any given set of energy signals, $\{s_i(t)\}$, $1 \leq i \leq M$ over $0 \leq t < T$, can be completely described by a subset of energy signals whose elements are linearly independent. In part 1, we are eliminating dependent signals from the set.

Part – I:

To start with, let us assume that all $s_i(t)$ are not linearly independent. Then, there must exist a set of coefficients $\{a_i\}$, $1 < i \leq M$, not all of which are zero, such that, $a_1s_1(t) + a_2s_2(t) + \ldots\ldots + a_Ms_M(t)$ $= 0$, $0 \leq t < T$

Verify that even if two coefficients are not zero, e.g. $a_1 \neq 0$ and $a_3 \neq 0$, then $s_1(t)$ and $s_3(t)$ are dependent signals.

Let usarbitrarilyset,$a_M \neq 0$. Then,

$$s_M(t) = -\frac{1}{a_M}\left[a_1 s_1(t) + a_2 s_2(t) + \ldots\ldots + a_{M-1}s_{M-1}(t)\right]$$

$$= -\frac{1}{a_M}\sum_{i=1}^{M-1}a_i s_i(t)$$

The above equationsshows that $s_M(t)$ could be expressed as a linear combination of other $s_i(t)$, $i = 1, 2, .., (M - 1)$.

We need to check in a similar way any dependent signals are there in the given signal set and eliminate them. Now we are left with signal set which contain only independent signals.

Part – II : We now show that it is possible to construct a set of 'N' orthonormal basis functions $\phi_1(t)$, $\phi_2(t)$, ….., $\phi_N(t)$ from $\{s_i(t)\}$, $i = 1, 2, ….., N$.

Let us choose the first basis functionas,

$$\varphi_1(t) = \frac{s_1(t)}{\sqrt{E_1}}$$

where E_1 denotes the energy of the first signal $s_1(t)$

$$s_{11} = \sqrt{E_1}$$

$$E_1 = \int_0^T s_1^{\;2}(t)\,dt$$

$$\therefore s_1(t) = \sqrt{E_1}\,.\varphi_1(t) = s_{11}\varphi_1(t)$$ Where

Now we can write

$$s_{21} = \int_0^T s_2(t)\phi_1(t)\,dt$$

Let us now define an intermediate function:

$$g_2(t) = s_2(t) - s_{21}\varphi_1(t);\;\; 0 \le t < T$$

Here $g_2(t)$ is orthogonal to the first basis function. This gives us a clue to determine the second basis function.

Now, energy of $g_2(t)$:

$$= \int_0^T g_2^{\;2}(t)\,dt$$

$$= \int_0^T \left[s_2(t) - s_{21}\varphi_1(t) \right]^2 dt$$

$$= \int_0^T s_2^{\;2}(t)\,dt - 2.s_{21}\int_0^T s_2(t)\varphi_1(t)\,dt + s_{21}^{\;2}\int_0^T \varphi_1^{\;2}(t)\,dt$$

$$= E_2 - 2.s_{21}.s_{21} + s_{21}^{\;2} = E_2 - s_{21}^{\;2}$$

So, we now set,

$$\varphi_2(t) = \frac{g_2(t)}{\sqrt{\int_0^T g_2^{\;2}(t)\,dt}} = \frac{s_2(t) - s_{21}\varphi_1(t)}{\sqrt{E_2 - s_{21}^{\;2}}}$$

$$E_2 = \int_0^T s_2^{\;2}(t)\,dt$$

Proceeding in a similar manner, we can determine the thirdbasisfunction, $\phi_3(t)$. For i=3,

$$g_3(t) = s_3(t) - \sum_{j-1}^{2} s_{3j}\varphi_J(t); \quad 0 \le t < T$$

$$= s_3(t) - \left[s_{31}\varphi_1(t) + s_{32}\varphi_2(t)\right]$$

$$s_{31} = \int_0^T s_3(t)\varphi_1(t)dt \quad \text{and} \quad s_{32} = \int_0^T s_3(t)\varphi_2(t)dt$$

It is now easy to identify that,

$$\varphi_3(t) = \frac{g_3(t)}{\sqrt{\int_0^T g_3^2(t)dt}}$$

Indeed, in general,

$$\varphi_i(t) = \frac{g_i(t)}{\sqrt{\int_0^T g_i^2(t)dt}} = \frac{g_i(t)}{\sqrt{Eg_i}}$$

for i = 1, 2,….., N, where

$$g_i(t) = s_i(t) - \sum_{j=1}^{i-1} s_{ij}\varphi_j(t)$$

$$s_{ij} = \int_0^T s_i(t).\varphi_j(t)dt$$

for i = 1, 2,….., N and j = 1, 2, …, M

Summarizing the steps to determine the orthonormal basis functions following the Gram Schmidt Orthogonalization procedure:

Ifthe signal set{$s_j(t)$} is known for j =1, 2,…..,M,0 $\le$ t <T,

- ➢ Deriveasubset of linearlyindependent energysignals,{$s_i(t)$},i = 1, 2,….., N≤ M.
- ➢ Find the energy of $s_1(t)$ as this energy helps in determining the first basis function $\phi_1(t)$, which is a normalized form of the first signal. Note that the choice of this 'first' signal is arbitrary.

> ➤ Findthescalar's$_{21}$',energyofthesecondsignal(E$_2$),aspecialfunction'g$_2$(t)'whichis   orthogonal to the first basis function and then finally the second orthonormal basisfunctionϕ_2(t)
> ➤ Follow the same procedure as that of finding the second basis function to obtain the other basisfunctions.

5.4 Concept of signalspace

Consider a set of basis functions
$\{\varphi_j(t)\}, j = 1,2,\ldots,N$ and $0 \leq t < T,$

$$s_i(t) = \sum_{j=1}^{N} s_{ij}\varphi_j(t), \quad i= 1, 2,\ldots\ldots, M \text{ and } 0 \leq t < T, \text{ such that,}$$

$$s_{ij} = \int_{0}^{T} s_i(t)\varphi_j(t)dt$$

Now, we can represent a signal $s_i(t)$ as a column vector whose elements are the scalar coefficientss_{ij}, j = 1, 2, ..., N :

These M energy signals or vectors can be viewed as a set of M points in an N – dimensional Euclidean space, known as the '*Signal Space*' *Signal Constellation* is the collection of M signals points (or messages) on the signal space.
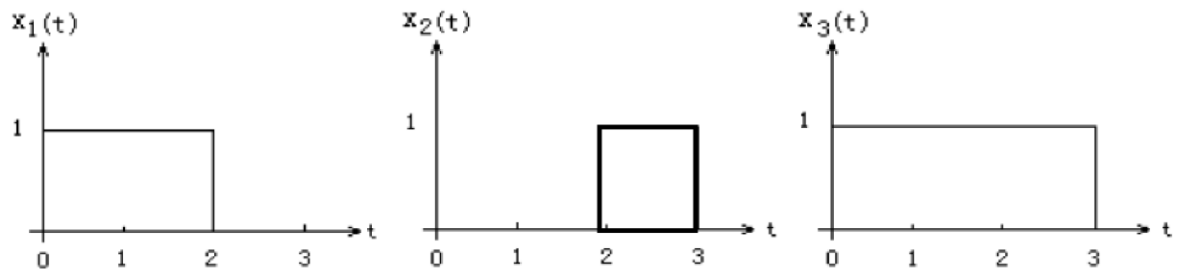
$$\overline{s_i} = \begin{bmatrix} s_{i1} \\ s_{i2} \\ \vdots \\ s_{iN} \end{bmatrix}_{1 \times N} : i= 1, 2,\ldots\ldots, M$$
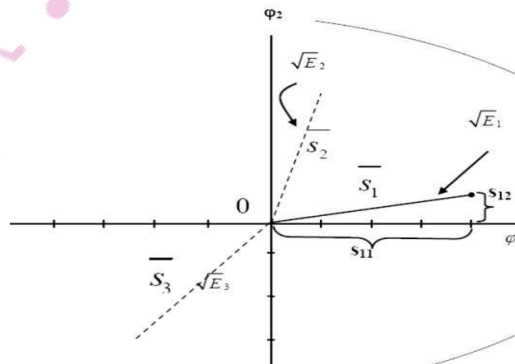
Fig(3) Signal space representation

Problem:

Use the Gram-Schmidt procedure to find a set orthonormal basis functions corresponding to the signals show below: Express x1, x2, and x3in terms of the orthonormal basis functions. Draw the constellation diagram for this signal set

Step 1: Eliminate dependent signals from the set.

Stage1: Here $x_3(t)=x_1(t)+x_2(t)$, so $x_3(t)$ is dependent signal and eliminate it from the set.
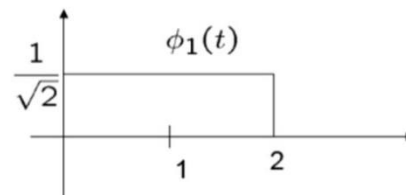
Remaining signals$\{x_1(t),x_2(t)\}$

Hence two basis functions exits for this signal set. First two basis functions are calculated as shown in step1 and step 2.

Then received signal point in signal space is calculated by finding coefficients S_{ij}

Step 1: $E_1 = \int_{-\infty}^{\infty} x_1^2(t)dt = 2$

$\phi_1(t) = \frac{1}{\sqrt{2}}x_1(t)$

$x_{11} = \sqrt{2}$
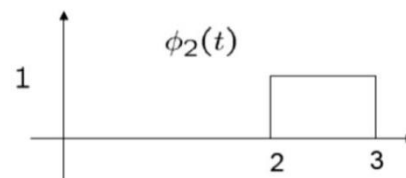
Step 2: $x_{21} = \int_{-\infty}^{\infty} x_2(t)\phi_1(t)dt = 0$

$g_2(t) = x_2(t)$ and $E_{g_2} = 1$

$\phi_2(t) = x_2(t)$

$x_{22} = 1$

Step 3: $x_{31} = \int_{-\infty}^{\infty} x_3(t)\phi_1(t)dt = \sqrt{2}$

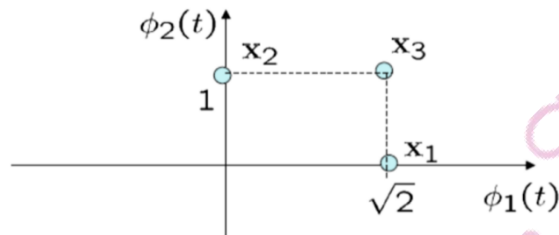$$x_{32} = \int_{-\infty}^{\infty} x_3(t)\phi_2(t)dt = 1$$

$$g_3(t) = x_3(t) - x_{31}f_1(t) - x_{32}f_2(t) = 0$$

Express x_1, x_2, x_3 in basis functions

$$x_1(t) = \sqrt{2}\phi_1(t), \quad x_2(t) = \phi_2(t)$$

$$x_3(t) = \sqrt{2}\phi_1(t) + \phi_2(t)$$

Constellation diagram

5.5 Use of Signal Space for Signal Detection in aReceiver:

The signal space defined above is very useful for designing a receiver as well. In a sense, much of the features of a modulation scheme, such as the number of symbols used and the energy carried by the symbols, is embedded in the description of its signal space. So, in absence of any noise, the receiver should detect one of these valid symbols only. However, the received symbols are usually corrupted and once placed in the signal space, they may not match with the valid signal points in some respect or the other. Let us briefly consider the task of a good receiver in such a situation. Let us assume thefollowing:

1. One of the M signals $s_i(t)$, i=1,2,....,M is transmitted in each time slot of duration 'T'sec.
2. All symbols are equally probable, i.e. the probability of occurrence of $s_i(t) = 1/M$, for all 'i'. 3. Additive White Gaussian Noise (AWGN) processes W (t) is assumed with a noise sample function w (t) having mean = 0 and power spectral density $_oN2$ [N_0: single sided powerspectral density of additive white Gaussian noise. Noise is discussed more in next two lessons] 4. Detection is on a symbol-by-symbolbasis.

Now, if R (t) denotes the received random process with a sample function r (t), we may write, r(t)=s(t)+w(t) ; $0 \leq t < T$ and i = 1,2,....,M

The job of the receiver is to make "best estimate" of the transmitted signal s_i (t) (or, equivalently, the corresponding message symbol m_i) upon receiving r(t). We map the received sample function

r(t) on the signal space to include a 'received vector' or 'received signal point'. The detection problem can now be stated as:

'Given an observation / received signal vector (r), the receiver has to perform a mapping from r an estimate for m, the transmitted symbol in a way that would minimize the average probability of symbol error'.

5.6 Maximum LikelihoodDetection:

This scheme provides a general solution to this problem when the noise is additive and Gaussian. At the receiver, we do not know which si(t) has been transmitted over the interval $0 \leq t < T$. So, the job of an efficient receiver is to make 'best estimate' of transmitted signal [si(t)] upon receiving r(t) and to repeat the same process during all successive symbol intervals. This problem can be explained nicely using the concept of '*signal space*', introduced earlier. Depending on the modulation and transmission strategy, the receiver usually has the knowledge about the signal constellation that is in use. This also means that the receiver knows all the nominal basis functions used by the transmitter. For convenience, we will mostly consider a transmission strategy involving two basis functions, **φ1** and **φ2** **Fig** below shows a two dimensional signal space showing a signal vector *si* and a received vector *r*.
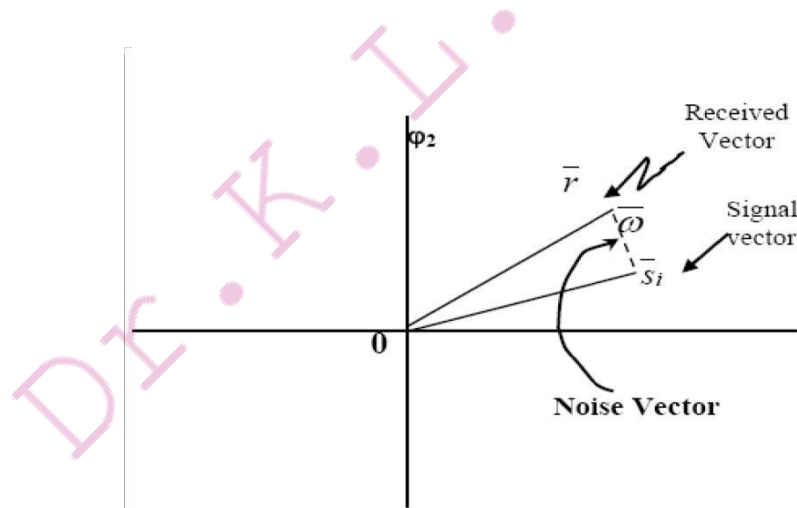

Fig 4: Errordetection

The job of the receiver can now be formally restated as: Given received signal vectors *r* , find estimates of correct message over symbol duration in a way that would minimize the probability of erroneous decision of a symbol on an average

The principle of Maximum Likelihood (ML) detection provides a general solution to this problemandleadsnaturallytothestructureofanoptimumreceiver.Whenthereceivertakesa

decision that $\hat{m} \neq m_i$, the associated probability of symbol error may be expressed as:

$P_e(m_i, x)= P (m_i \, not \, sent|x) = 1 – P(m_i \, sent \, |x).$

In the above, $P(m_i$ not sent|x) denotes the probability that 'm_i' was not transmitted while x is received. So, an optimum decision rule may heuristically be framed as:

Set $\hat{m} = m_i$ if $P(m_i \, sent \, |x) \geq P(m_k \, sent|x)$, for all $k \neq i$

This decision rule is known as *maximum a posteriori probability* rule. This rule requires the receiver to determine the probability of transmission of a message from the received vector. Now, for practical convenience, we invoke Bayes' rule to obtain an equivalent statement of optimum decision rule in terms of a priori probability:

$$ Pr\left(m_i|\bar{r}\right) \quad Pr\left(\bar{r}\right) \quad = Pr\left(\bar{r}|m_i\right)Pr\left(m_i\right) $$

we see that determination of maximum a posteriori probability is equivalent to determination of maximum a priori probability $p(\hat{r} \,/\, mi)$. This a priori probability is also known as the *'likelihood function'*.

So the decision rule can equivalently be stated as:

Set $\hat{m} = m_i$ if $pr(\hat{r} \,/\, mi)$ is maximum for $k = i$

For an AWGN channel, the following statement is equivalent to ML decision:

The received vector r lies in decision region Z_i if,

$$ \left(\sum_{j=1}^{N} r_j s_{kj} - \frac{1}{2}E_k \right) $$ is maximum for $k = i$

5.7 CorrelationReceiver:

A *Correlation Receiver*, consisting of a Correlation Detector and a Vector Receiver implements the M – L decision rule stated above by,

$$ \left(\sum_{j=1}^{N} r_j s_{kj} - \frac{1}{2}E_k \right) $$

(a) first finding $\hat{r}$ with a correlation detector andthen

(b) Computing the metric and taking decision in a vectorreceiver.

Fig5. Below shows the structure of a Correlation Detector for determining the received vector r from the received signal r(t). Fig6 highlights the operation of a Vector Receiver.

In the correlation detector, multiply received signal with different basis functions and integrate the product to identify the correlation between the received signal and individual basis function and form the receivedvector.
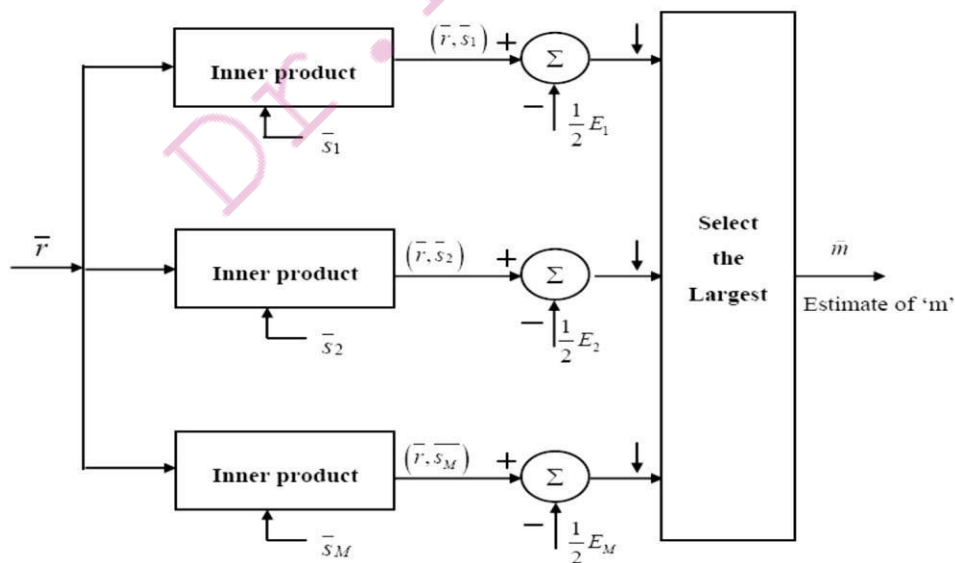
The vector receiver is constructed based on ML detection as per the equation

$$\left(\sum_{j=1}^{N} r_j s_{kj} - \frac{1}{2} E_k \right)$$

Decision is made by selecting the signal with maximum likelihood value.
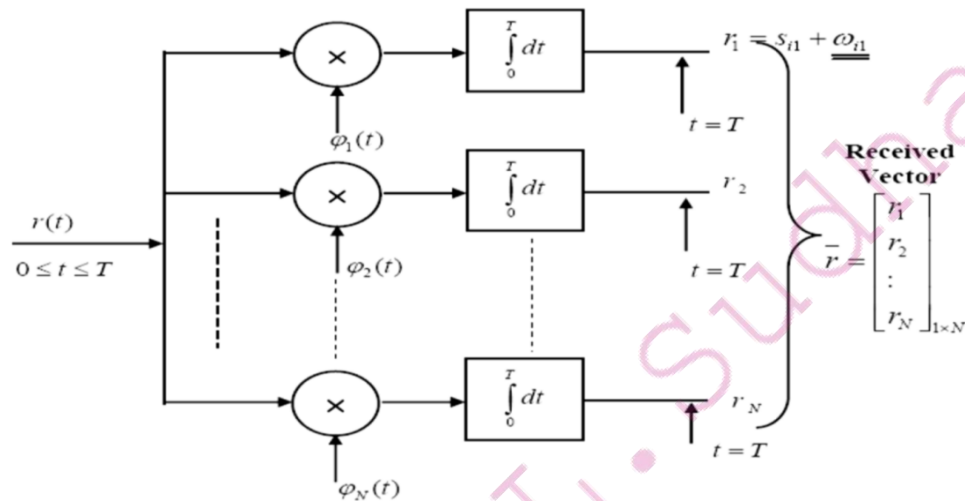
Fig(5) The structure of a Correlation Detector

Fig(6) Block schematic diagram for the Vector Receiver

5.8 Matched FilterReceiver:

Certain structural modification and simplifications of the correlation receiver are possible by observing that,

(a) All orthonormal basis functions ϕ_j are defined between $0 \leq t \leq T_b$ and they are zero outside this range.

(b) Analog multiplication, which is not always very simple and accurate to implement, of the received signal r(t) with time limited basis functions may be replaced by some filtering operation. Let, $h_j(t)$ represent the impulse response of a linear filter to which r(t) isapplied.

Then, the filter output $Y_j(t)$ may be expressed as:

$$y_j(t) = \int_{\infty}^{\infty} r(\tau)\, h_j(t - \tau)d\tau$$

Now, let $$h_j(t) = \varphi_j(T - t),$$

$$y_j(t) = \int_{-\infty}^{\infty} r(\tau).\varphi_j[T - (t - \tau)]d\tau$$

$$= \int_{-\infty}^{\infty} r(\tau).\varphi_j(T + \tau - t)d\tau$$

If we sample this output at t = T, and recalling that $\phi_j(t)$ is zero outside the interval $0 \leq t \leq T$

Using this, the above equation may be expressedas,

$$y_j(T) = \int_0^T r(\tau)\varphi_j(\tau)d\tau$$

From our discursion on correlation receiver, we recognize that,

$$r_j = \int_0^T r(\tau)\varphi_j(\tau)d\tau = y_j(\tau)$$

The important expression of above equation is that it tells us that the j[th]correlation output can equivalentlybeobtainedbyusingafilterwith$h_j(t)=\phi_j(T-t)$and samplingitsoutput at t =T.

The filter is said to be matched to the orthonormal basis function $\phi_j(t)$ and the alternate receiver structure is known as a matched filter receiver. The detector part of the matched filter receiver is shown in figbelow.
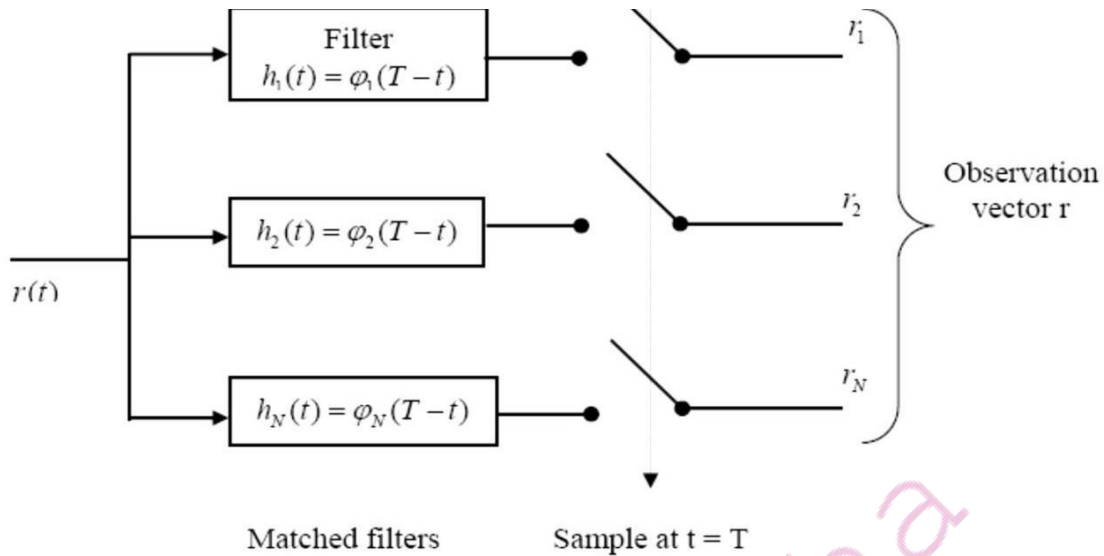
Fig(7)The block diagram of a matched filter bank that is equivalent to a Correlation Detector

A physically realizable matched filter is to be causal i.e $h_j(t)=0$ for $t<0$.

Properties of a Matched Filter

Wenotethatafilterwhichismatchedtoaknownsignal $\phi(t), 0 \leq t \leq T$ is characterized by an impulse response h(t) which is a time reversed and delayedversionof $\phi(t)$ i.e.

$h_j(t)=\phi_j(T-t)$

In the frequency domain, the matched filter is characterized by a transfer function, which is, except for a delay factor, the complex conjugate of the F.T. of $\phi(t)$,i.e.

$$H(f) = \Phi^*(f) \exp(-j2\pi fT)$$

Property (1) : The spectrum of the output signal of a matched filter with the matched signal as input is, except for a time delay factor, proportional to the energy spectral density of the input signal.

Let, $\Phi_0(f)$ denote the F.T. of the filter of output $\Phi_0(t)$. Then,

$$\Phi_0(f) = H(f)\Phi(f)$$
$$= \Phi^*(f)\Phi(f)\exp^{(-j2\pi fT)}$$
$$= \underbrace{|\Phi(f)|^2}_{\substack{\text{Energy spectral} \\ \text{density of} \varphi(t)}} \exp^{(-j2\pi fT)}$$

Property (2): The output signal of a matched filter is proportional to a shifted version of the autocorrelation function of the input signal to which the filter is matched.

This property follows from Property (1). As the auto-correlation function and the energy spectral density form F.T. pair, by taking IFT of above equation, we may write,

$$\varphi_0(t) = R_\varphi(t-T)$$

Where $R_\Phi(\tau)$ is ACF of $\Phi_0(t)$. At t=T, we get R(0)=energy of the signal.

Property (3): The output SNR of a matched filter depends only on the ratio of the signal energy to the psd of the white noise at the filter input.

Let us consider a filter matched to the input signal $\Phi(t)$

Fromproperty(2), weseethat the maximumvalueof $\Phi_0(t)$at t=T isϕ_0(T-t)=E

Now, it may be shown that the average noise power at the output of the matched filter is given by,

$$E[n^2(t)] = \frac{N_0}{2} \int_{-\infty}^{\infty} |\varphi(f)|^2 \, df = \frac{N_0}{2}.E$$

The maximum signal power

$$= |\varphi_0(T)|^2 = E^2$$

Hence

$$(SNR)_{max} = \frac{E^2}{\frac{N_0}{2}E} = \frac{2E}{N_0}$$

Note that SNR in the above expression is a dimensionless quantity.

This is a very significant result as we see that the SNR_{max} depends on E and N_0 but not on the shape of $\phi(t)$ This means a freedom to the designer to select specific pulse shape to optimize other design requirement (the most usual requirement being the spectrum or, equivalently, the transmission bandwidth) while ensuring sameSNR.

Property (4): The matched-filtering operation may be separated into two matching condition: namely, spectral phase matching that produces the desired output peak at t = T and spectral amplitude matching that gives the peak value its optimum SNR.

$$\Phi(f) = |\Phi(f)| \exp[j\theta(f)]$$

The filter is said to be matched to the signal $\phi(t)$ in spectral phase if the transfer function of the filter follows:

$$H(f) = |H(f)| \exp[-j\theta(f) - j2\pi fT]$$

Here H (f) is real non-negative and 'T' is a positive constant.

The output of such a filter is,

$$\varphi_0'(t) = \int_{-\infty}^{\infty} H(f).\Phi(f).\exp(j2\pi ft)df$$

$$= \int_{-\infty}^{\infty} |H(f)||\Phi(f)|.\exp[j2\pi f(t-T)df$$

Question bank:

1. Define the following terms related to detection theory: vector transmitter, average probability of symbol error, basis functions, Signalspace.
2. Explain with equations, how you determine basis functions for a given set of signalsusing
3. Gram Schmidt orthogonalizationprocedure.

   Given the signals shown below, find basis functions using GSO procedure. Draw signal space diagram and mark the signalpoints

(a)
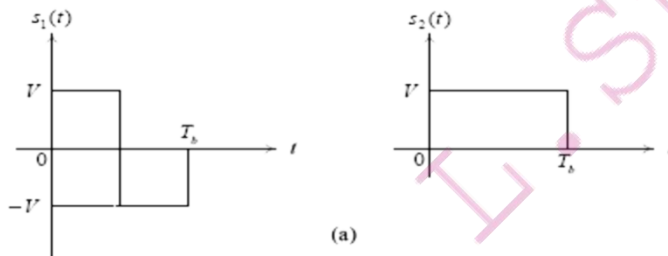
4. Given two signals $s_1(t)=A\cos(w_1 t)$ and $s_2(t)=A\cos(w_2 t)$, find basis functions and mark signals in signal spacediagram
5. What is ML detector? With neat block diagram explain vector receiver part of optimumreceiver
6. What is a matched filter? Explain the functioning of detector part of matched filter withequations.
7. What is a correlation receiver? Explain the functioning of correlation receiver withequations.
8. Compare two optimumreceivers.
9. What are the properties of matched filter? Provethem
10. Given the basis functions as shown below, find the matched filter transfer functions and its outputs.

(a)
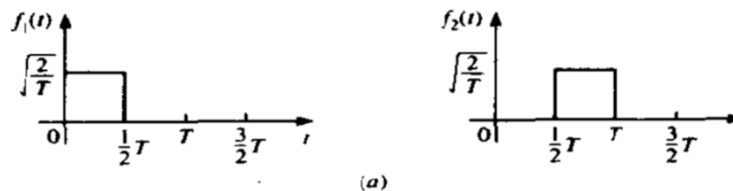
One mark questions:
1. Energy of a signal s(t) is determined by theequation_____
2. AWGN expansionis_____
3. Probability of symbol error is definedas_____