




Earth Observation Sensors and Platforms

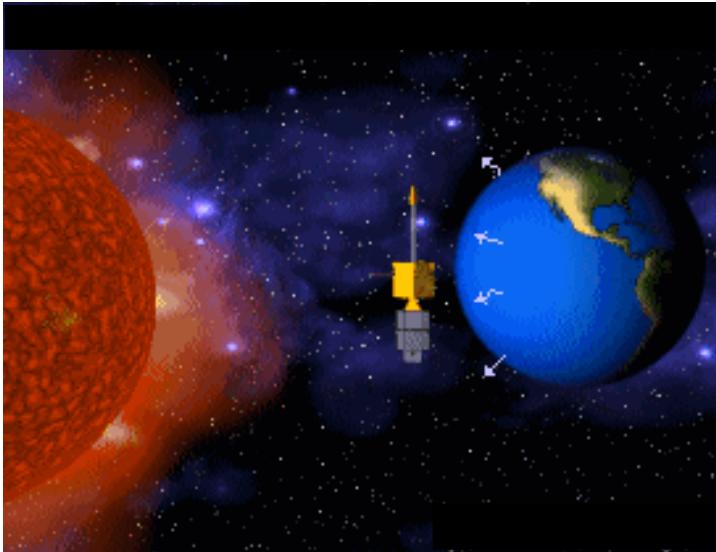

Vinay Kumar
Scientist, IIRS-ISRO Dehradun
vinaykumar@iirs.gov.in

Remote Sensing


- ***Remote Sensing is the art, science and technology of observing an object scene or phenomenon by instrument-based techniques.***
- **Remote:** because observation is done at a distance without physical contact with the object of interest
- **Sensing:** Detection of energy, such as light or another form of electromagnetic energy

Measurement from a distance



It enables us to observe and study nature in ways that would otherwise be beyond human capability, across great distances and at wavelengths of light invisible to human eyes


Remote Sensing Process

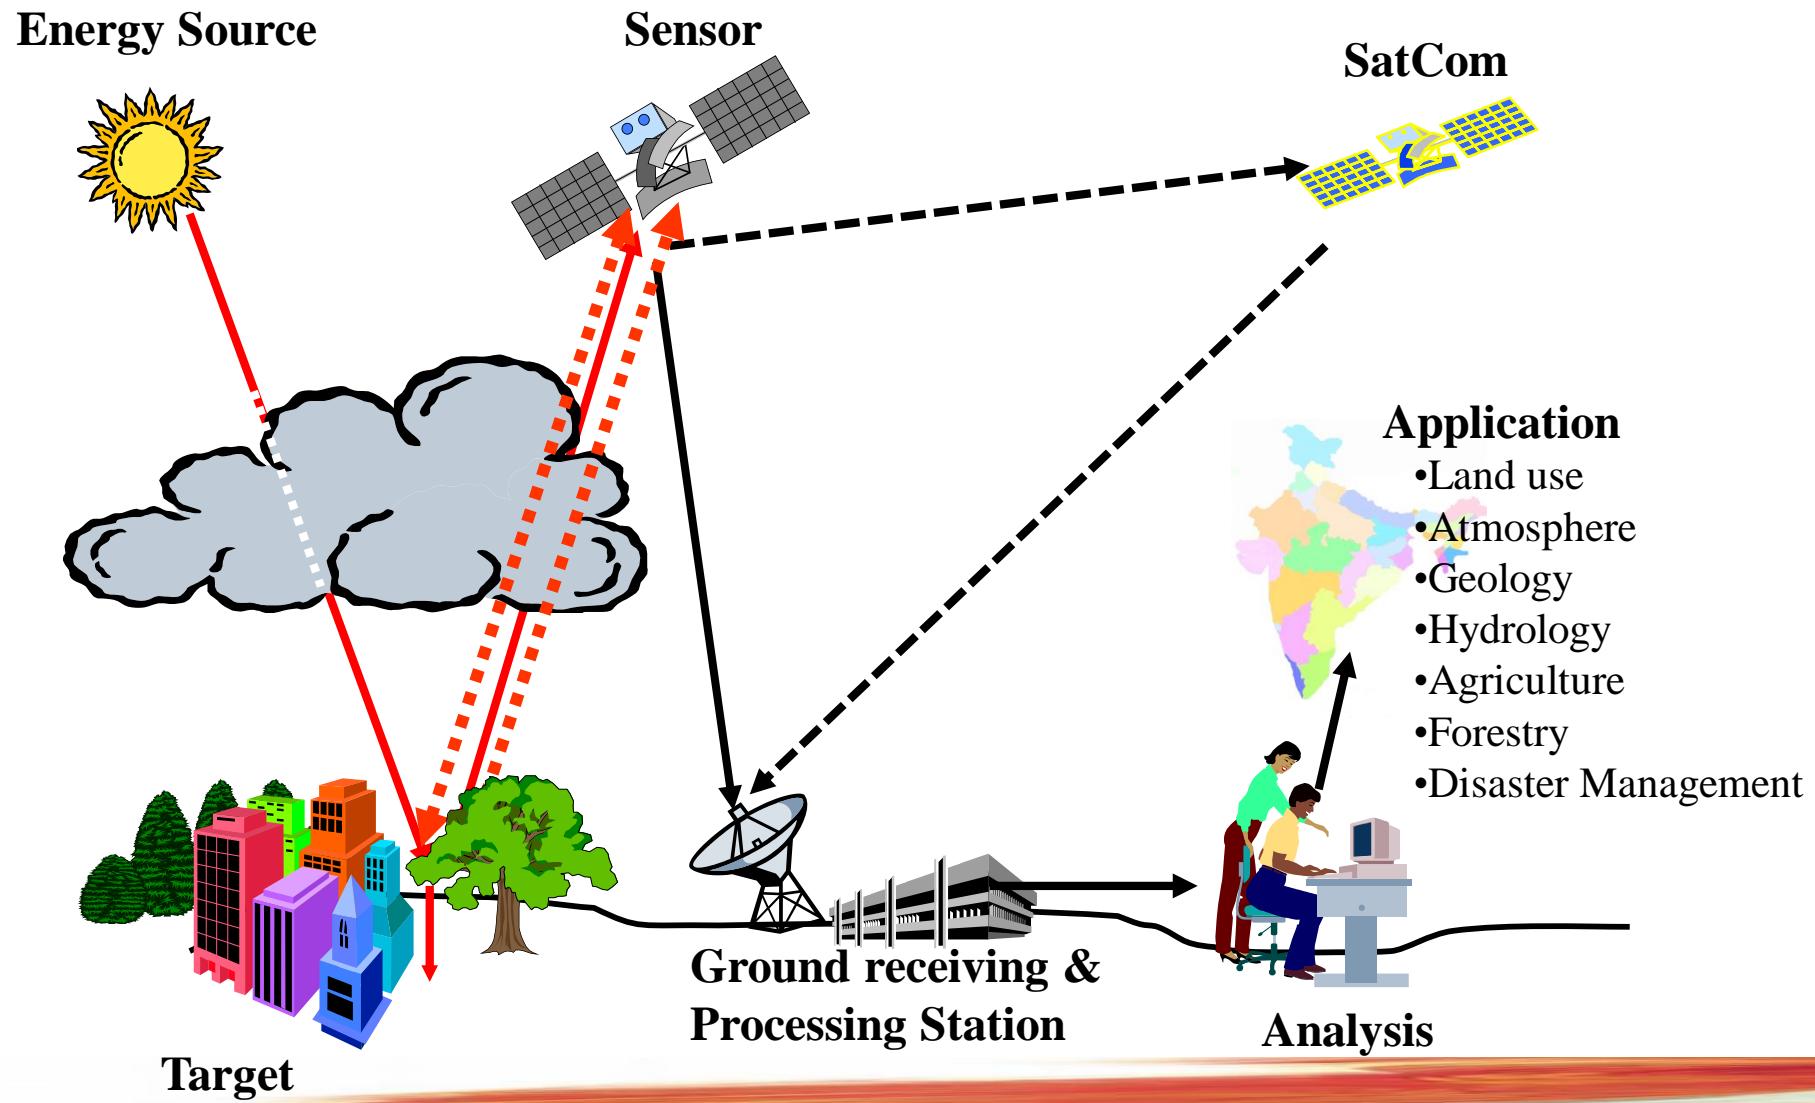

Indian Receiving Station at Shadnagar



Definition

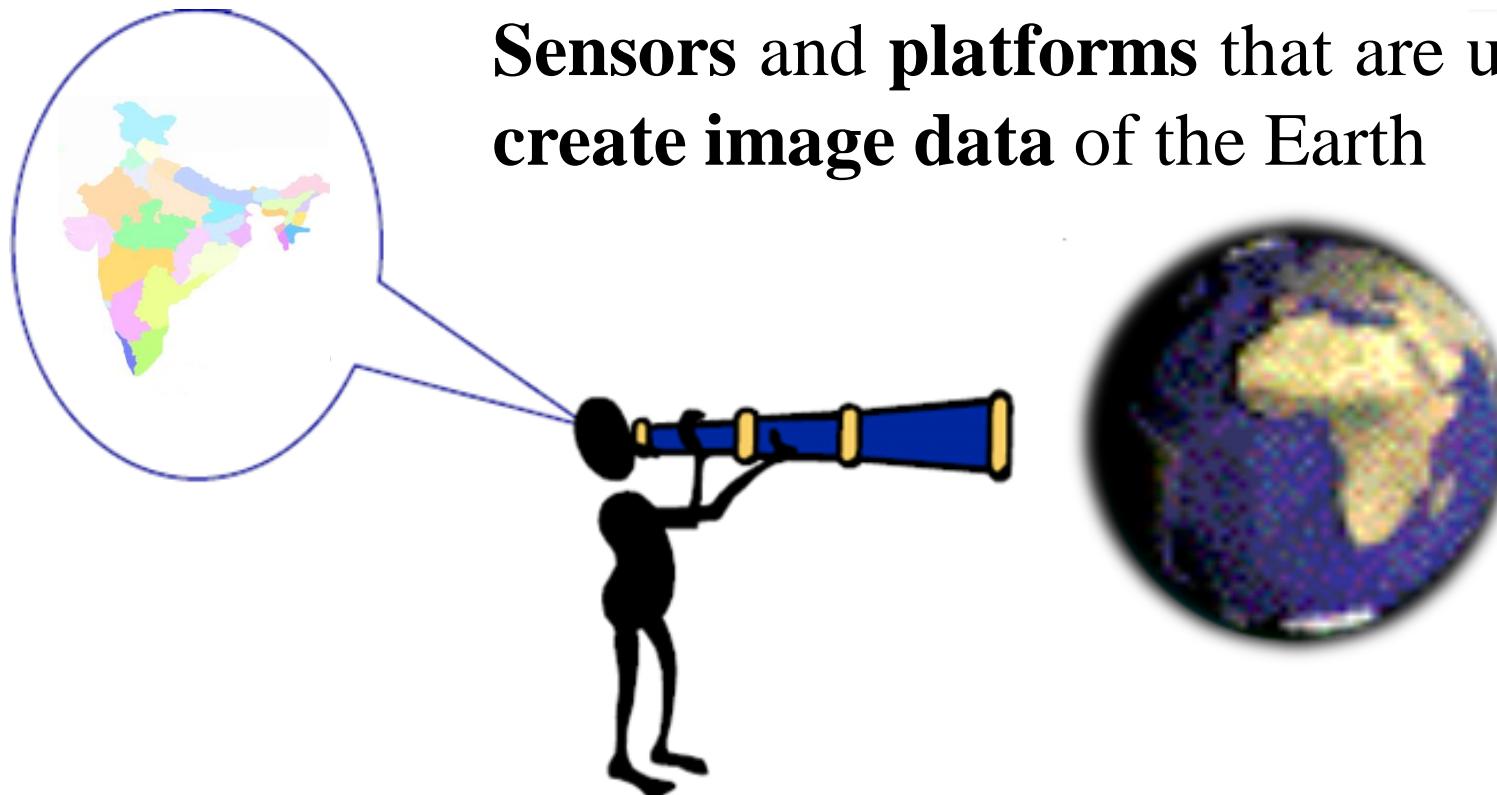


Sensors and platforms that are used to create **image data** of the Earth


Sensors= a device that **records EM Energy**
Platforms= carrier bed used **to carry a sensor**

History of remote sensing

- 1827 - first photograph
- 1858 - first aerial photograph from a hot air balloon
- 1861-1865 - Balloon photography used in American Civil War
- 1888 – ‘rocket’ cameras
- 1903 - pigeon-mounted camera patented
- 1906 - photograph from a kite
- 1914-1945 - Plane mounted Cameras WWI, WWII
- 1956 - U2 spy planes
- 1957 - Sputnik-1
- 1960 - 1st meteorological satellite ‘TIROS-1’ launched
- 1967 - NASA ‘Earth Resource Technology Satellite’ programme
- 1972 - ERTS (Landsat) 1 launched...

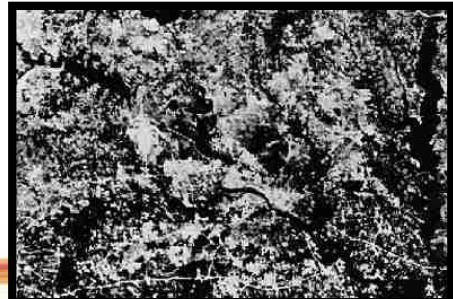


**First ERTS-1 image
Dallas, 23 July 1973.**

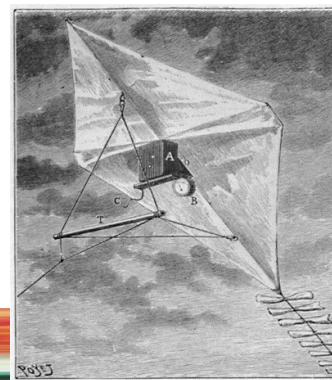



Platforms

- Ground based**
- Airborne**
- Spaceborne**

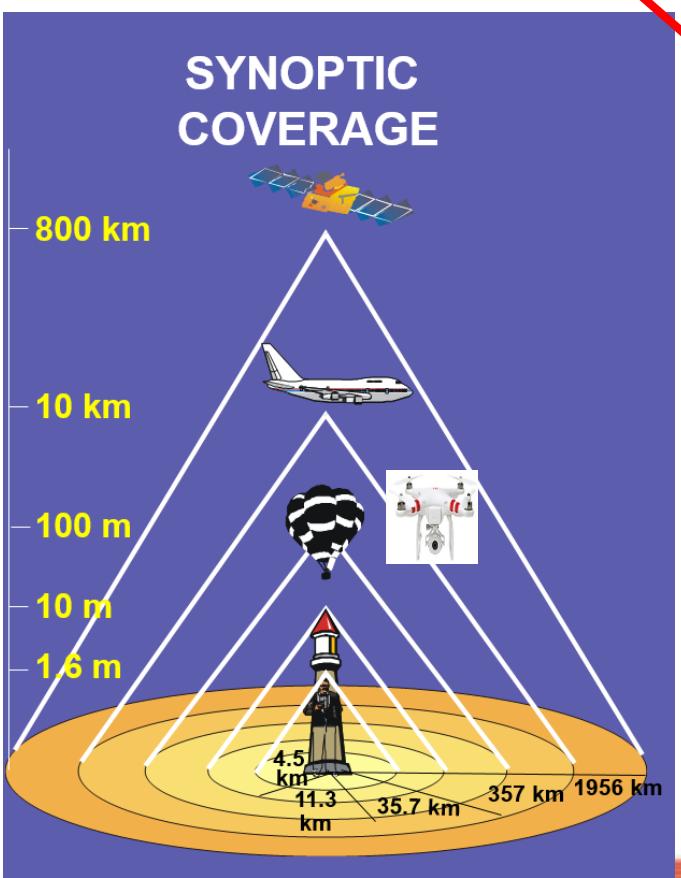

Ground Based Platforms

- Used to **record detailed information** about the surface which is compared with **information collected from aircraft or satellite sensors**.

- In some cases, this can be used to **better characterize the target** which is being imaged by the other sensors, making it possible to **better understand the information in the imagery**.

- Sensors may be **placed on a ladder, scaffolding, tall building, crane, etc.**



Airborne Platforms

- Are primarily **stable wing aircraft**, although **helicopters** are occasionally used.

- To collect **very detailed images** and facilitate the collection of data over **any portion of the Earth's surface at any time**.




Spaceborne Platforms

- **Space remote sensing** is sometimes conducted from the
 - Space Shuttle
 - International Space Station
 - Satellites (more commonly)
- **Satellites** are objects which **revolve around another object** - in this case, the Earth.
- e.g: the **moon is a natural satellite**, whereas **man-made satellites** include those platforms launched for **remote sensing, communication, and telemetry (location and navigation) purposes**.




Orbits

- The path followed by the satellite is called orbit.
- The satellite moves as per Kepler's law.

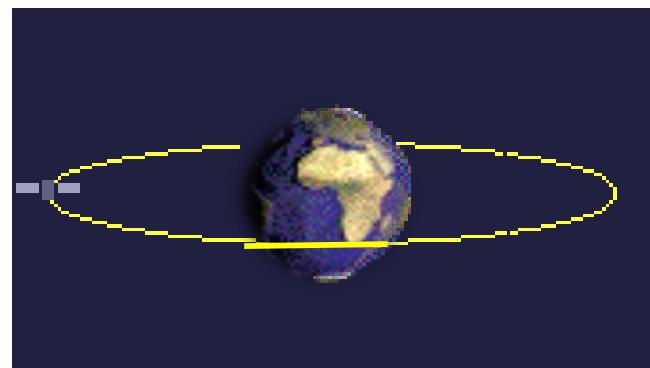


Kepler's Law

- **1st Law:** The path followed by each planet is an ellipse with sun at one FOCI.

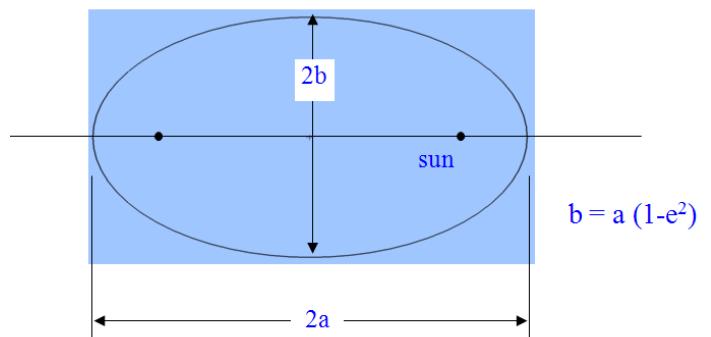

- **2nd Law:** The line joining to the planet to sun sweeps out equal areas in equal times.



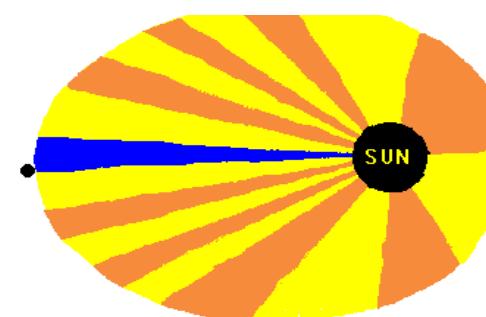


- **3rd Law:** The square of the period of the planet is proportional to the cube of the semi major axis.

$$T^2 \propto a^3$$


Satellite Orbital Characteristics

- Altitude*
- Inclination angle*
- Period*
- Repeat Cycle*
- Swath*
- Ascending pass & Descending pass*
- Perigee & Apogee*

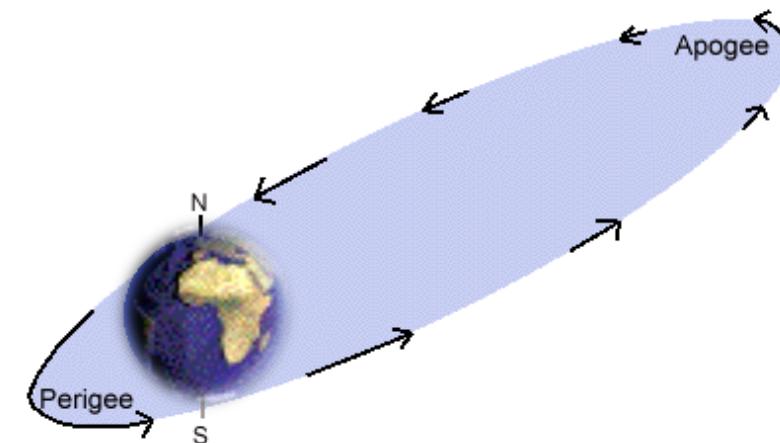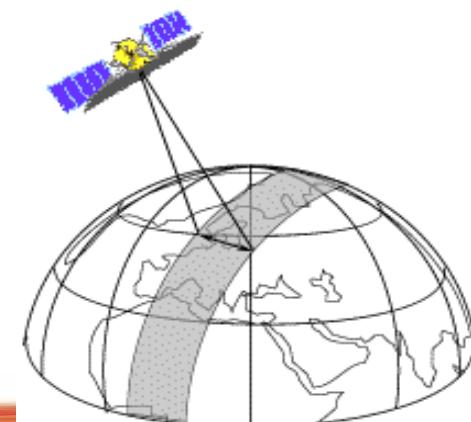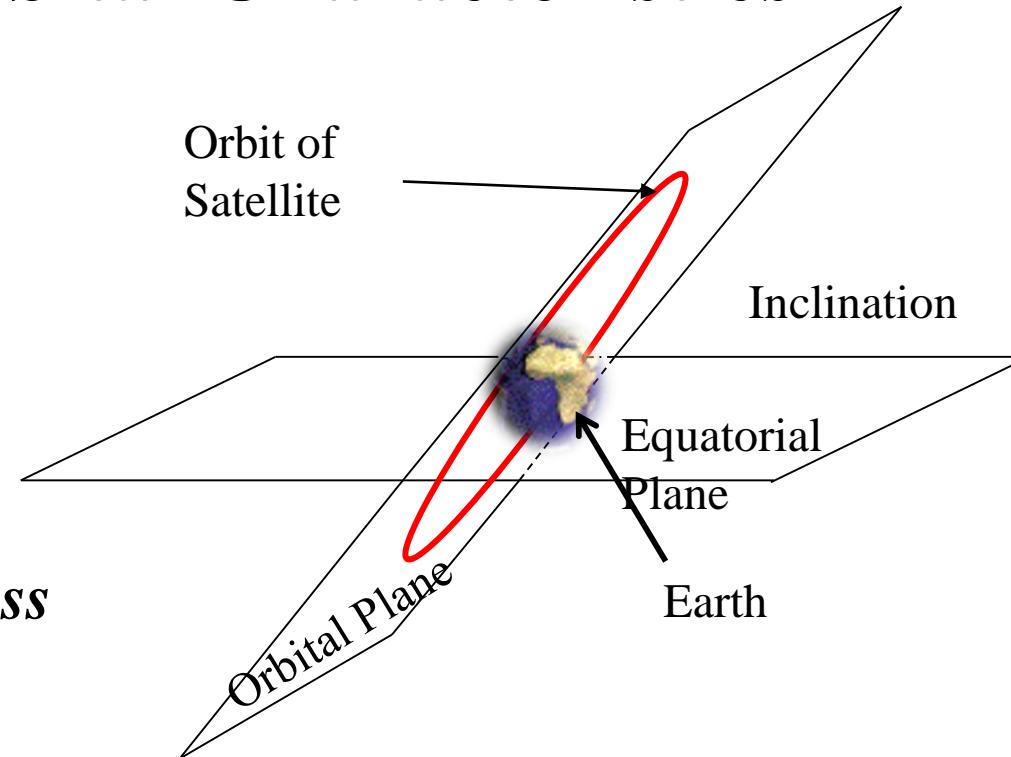


Geostationary Satellite

- Altitude ~ **36,000 km**,
- Orbit inclination ~ **0°**
- Period of orbit = **24 hours**
- Global coverage requires several geostationary satellite** in orbits at different latitudes
- Good for repetitive observations, **poor for spatially detailed data**
- Large distortions at high latitudes
- W-E satellite orbiting Earth**
- Mainly used for communication and meteorological applications – **GOES, METEOSAT, INSAT, GSAT etc.**

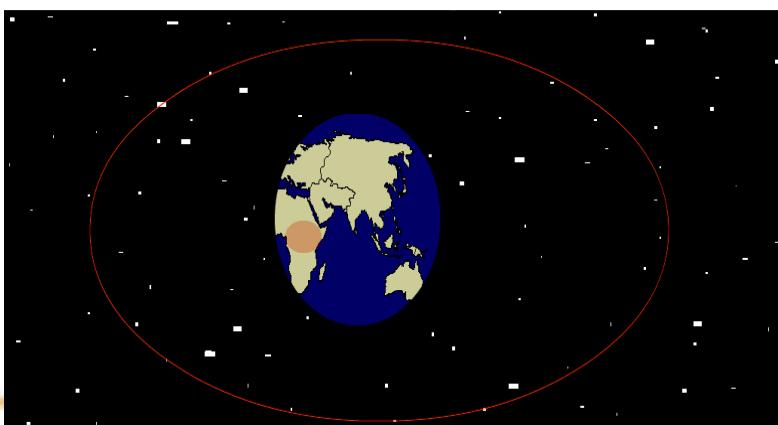


Sun Synchronous Satellite

- Altitude ~ **700-800 km**
- Orbit inclination ~ **98.7°**
- Orbital period ~**90 minutes**
- Sun-synchronous, near-polar, near-circular
- Satellite orbit is fixed in space (basically **north-south**): Earth rotates beneath it (**west-east**)
- Cross the equator (N-S) at ~**10.30am local time**
- Satellite Orbital plane is near polar and the altitude is such that the satellite passes each place at same local sun-time.
- Cover entire globe – **LANDSAT, SPOT, Sentinel, IRS, RISAT** etc.

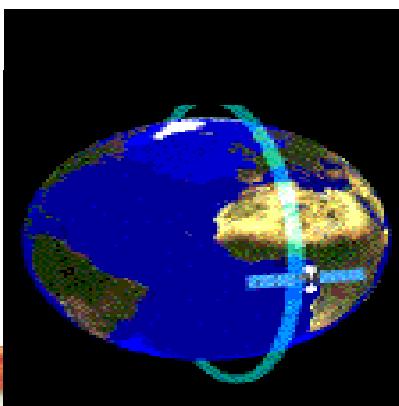





The satellite's orbit (North –South) and the rotation of the Earth (from west to east) work together to allow complete coverage of the Earth's surface, after it has completed **one complete cycle of orbits**

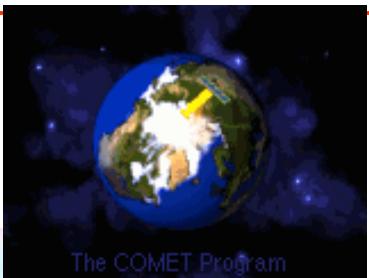


The COMET Program

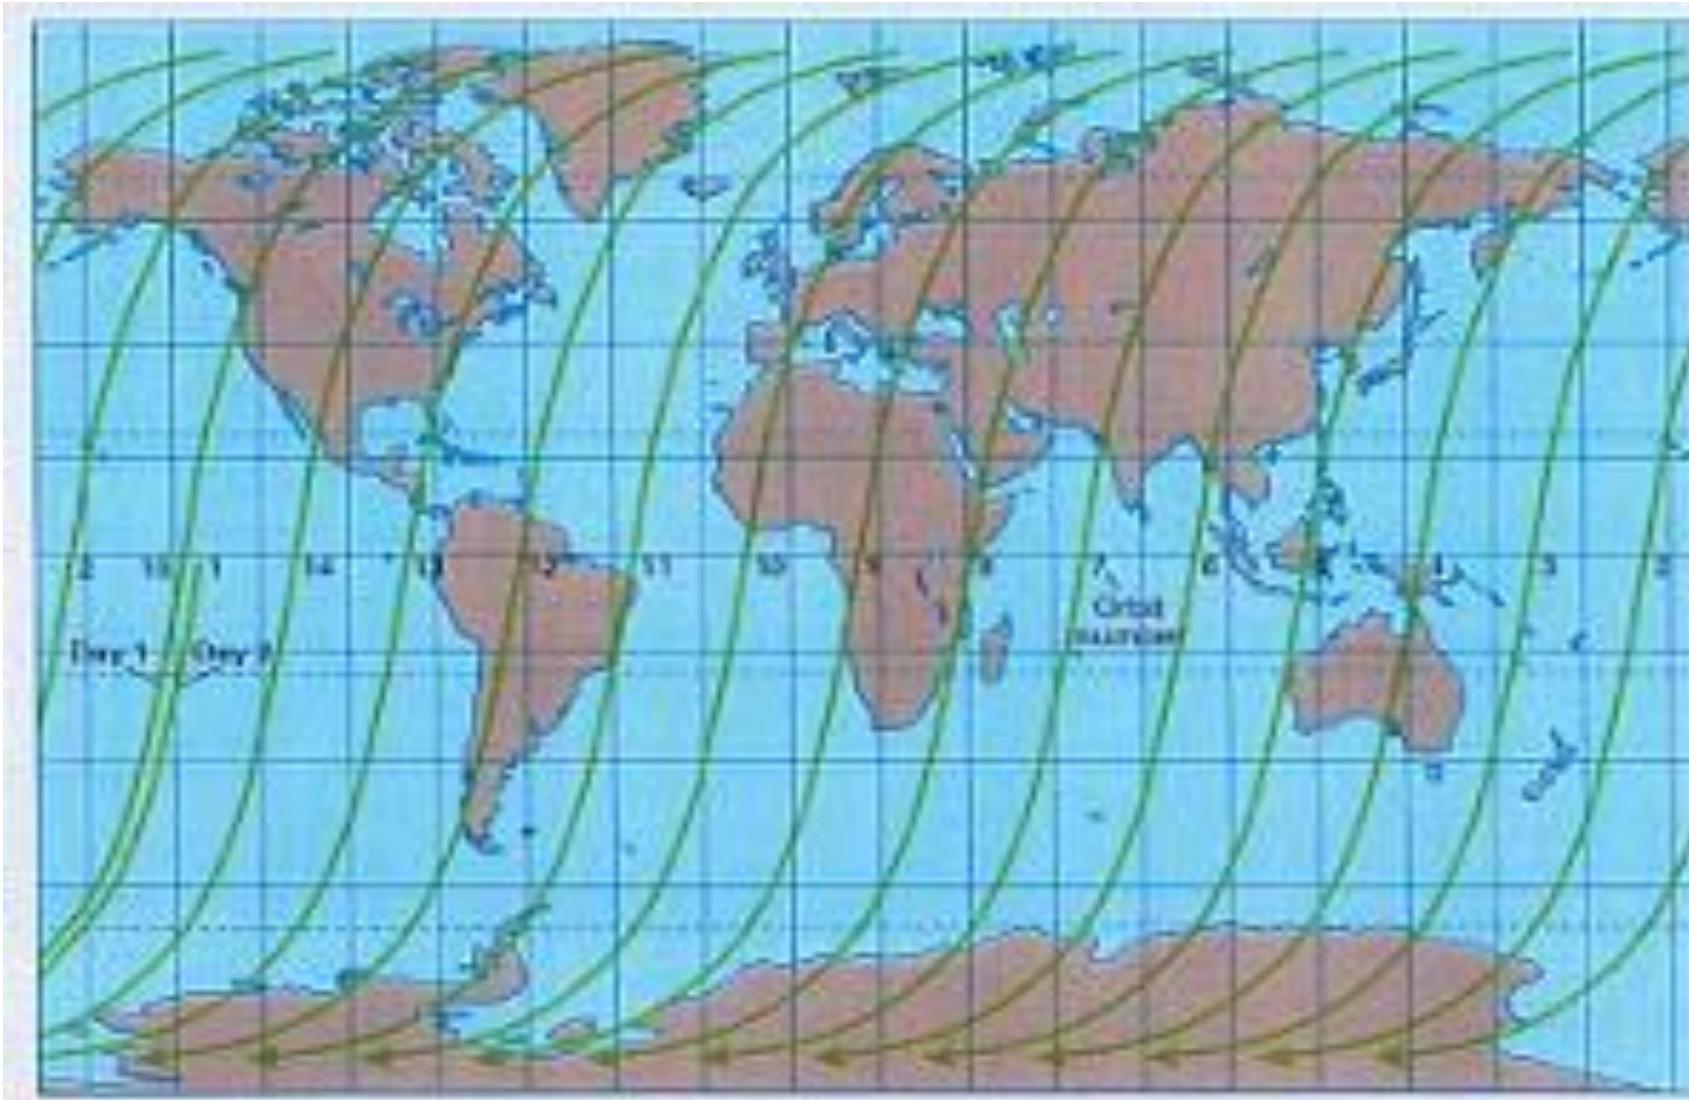

SENSORS

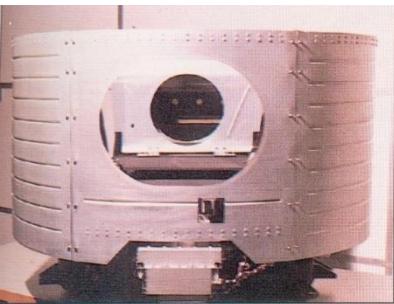


Passive

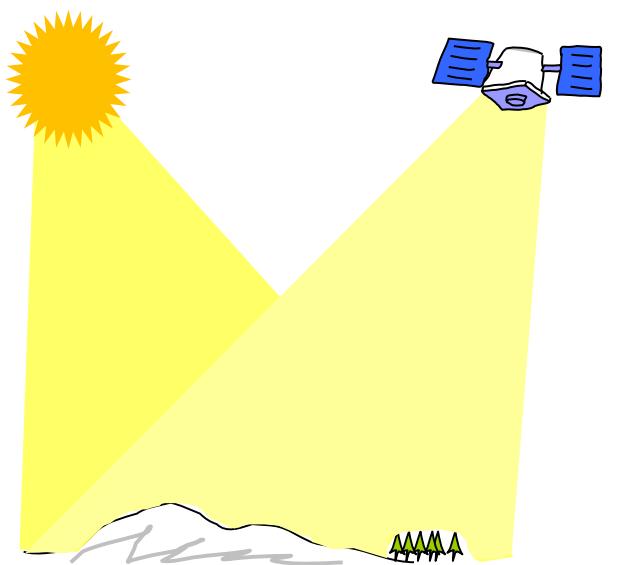

Optical Remote Sensing

Active

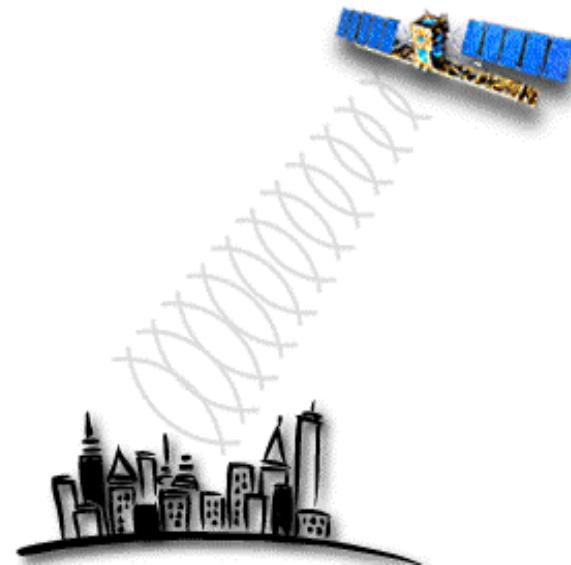

Microwave Remote Sensing



Imaging Sensors

Passive Sensors

- Photographic Camera**
- The Optical Scanners**
 - Across Track Scanners
 - Along Track Scanners
- The Thermal Scanner**

Active Sensors

- SAR (Synthetic Aperture RADAR)**
- LiDAR (Light Detection and Ranging)**

Non-imaging Sensors

Passive Sensors

- Spectro-radiometers


Active Sensors

- Laser Distance Meter
- Laser Water Depth Meter
- Microwave Altimeter





Across Track Multispectral Scanning

- ❑ Whisk broom scanning
- ❑ Scan the Earth in a series of lines.
- ❑ The lines are oriented perpendicular to the direction of motion of the sensor platform (i.e. across the swath).
- ❑ Data are collected within an arc below the system typically of some **90° to 120°**
- ❑ Multispectral scanner (MSS) and thematic mapper (TM) and Operational Land Imager (OLI) of LANDSAT, and Advanced Very High Resolution Radiometer (AVHRR) of NOAA are the examples of Whisk Broom scanners

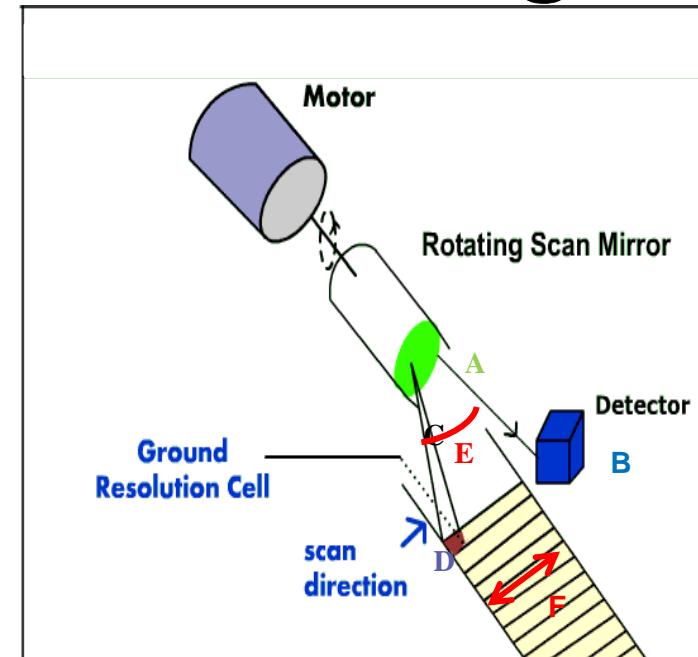


Along Track Multispectral Scanning

- ❑ Push broom scanning
- ❑ Scan the Earth in a series of lines.
- ❑ This also use the forward motion of the platform to record successive scan lines and build up a two-dimensional image, perpendicular to the flight direction.
- ❑ Linear arrays normally consist of numerous **charge-coupled devices (CCDs)** positioned end to end.
- ❑ Linear imaging self scanning (LISS) and Wide Field Sensor (WiFS) of IRS Series, and sensors of SPOT series are the examples of Push broom scanners

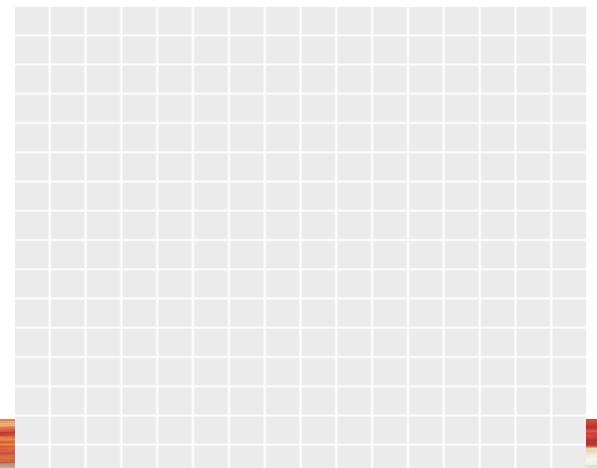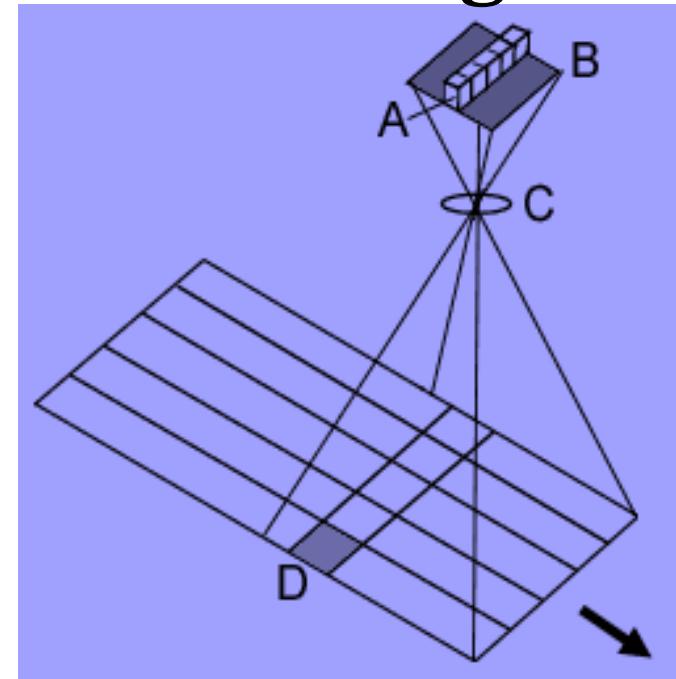


Across Track Scanners

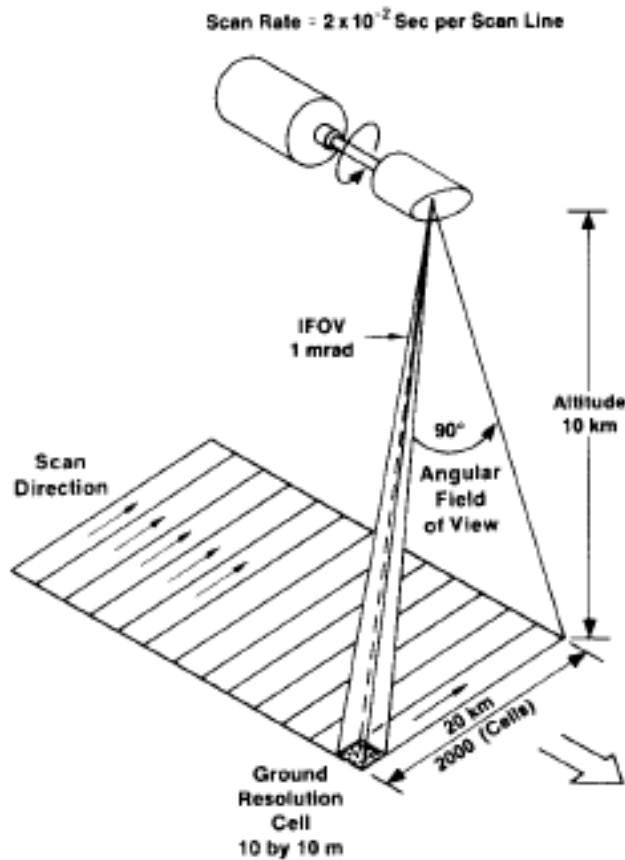

Along Track Scanners

IFOV for Each Detector = 1 mrad

Sabin, 1997

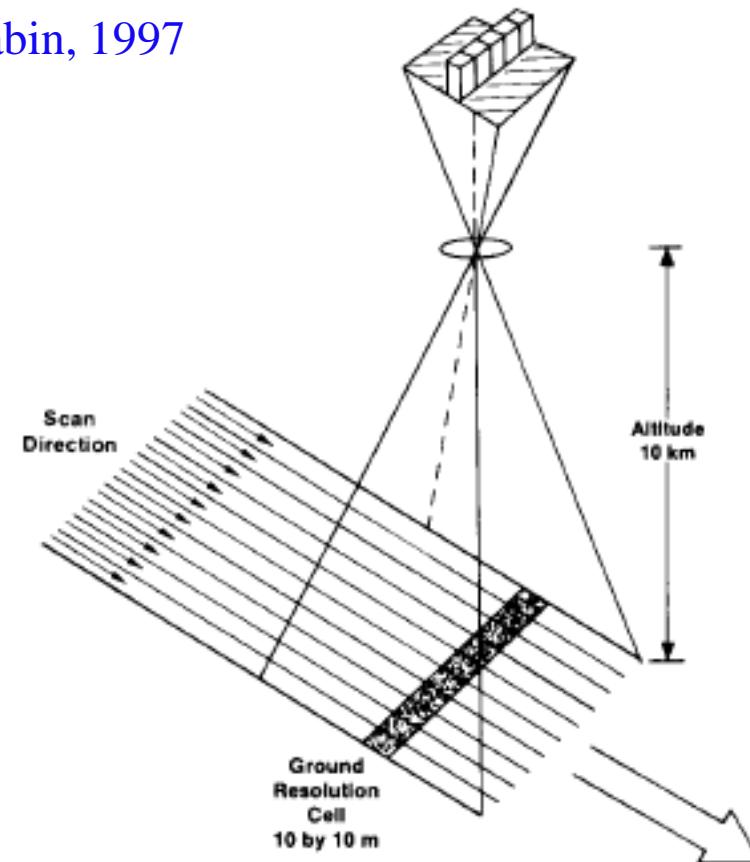

$$\text{Dwell Time} = \frac{\text{Scan Rate per Line}}{\text{Number Cells per Line}} = \frac{2 \times 10^{-2} \text{ sec}}{2000 \text{ cells}} = 1 \times 10^{-5} \text{ sec} \cdot \text{cell}^{-1}$$

Whiskbroom

$$\text{Dwell Time} = \frac{\text{Cell Dimension}}{\text{Velocity}} = \frac{10 \text{ m} \cdot \text{cell}^{-1}}{200 \text{ m} \cdot \text{sec}^{-1}} = 5 \times 10^{-2} \text{ sec} \cdot \text{cell}^{-1}$$

Pushbroom



Field of View (FOV), Instantaneous Field of View (IFOV)

Dwell time is the time required for the detector IFOV to sweep across a ground cell.


The longer dwell time allows more energy to impinge on the detector, which creates a stronger signal.

High Resolution Imaging mode

□ Time Delay Integration (TDI)

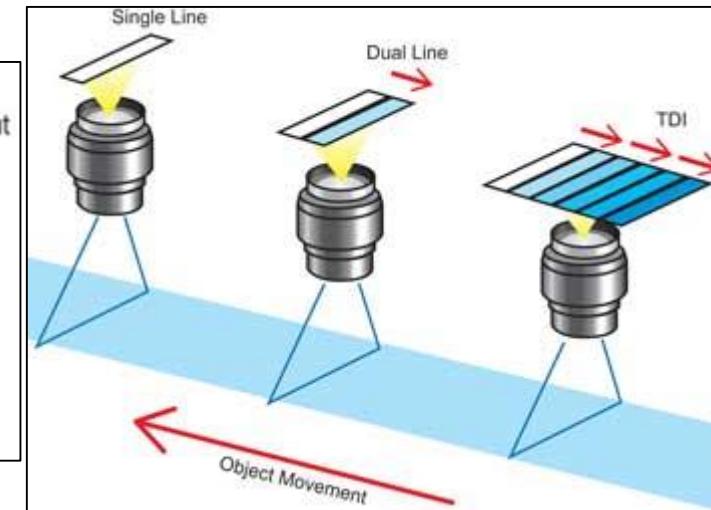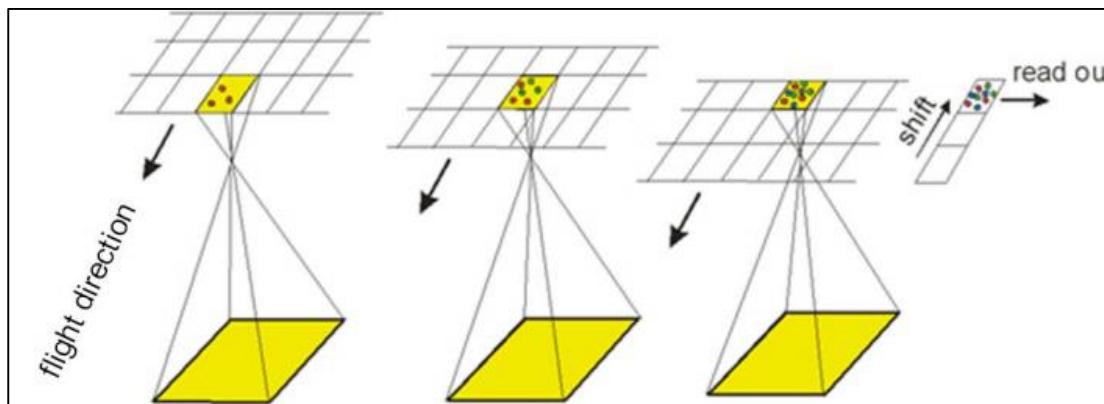


□ Step & Stare

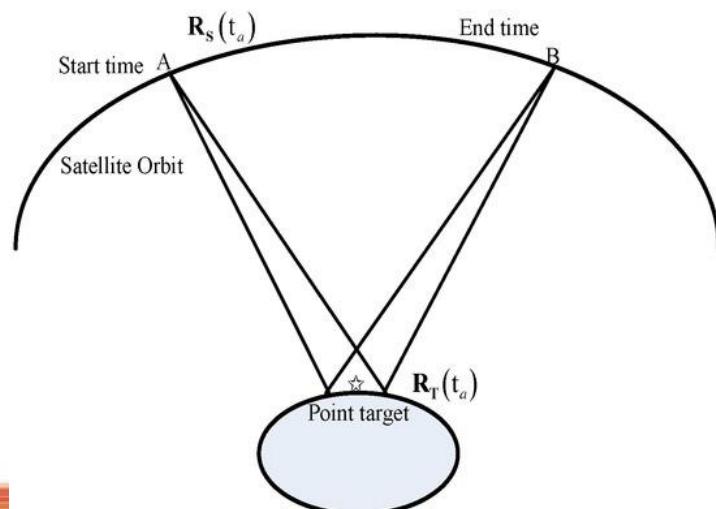

What is a digital image?

- Grid cells or pixels
- Each pixel has a digital number (DN) which represents: Spectral Reflectance Value

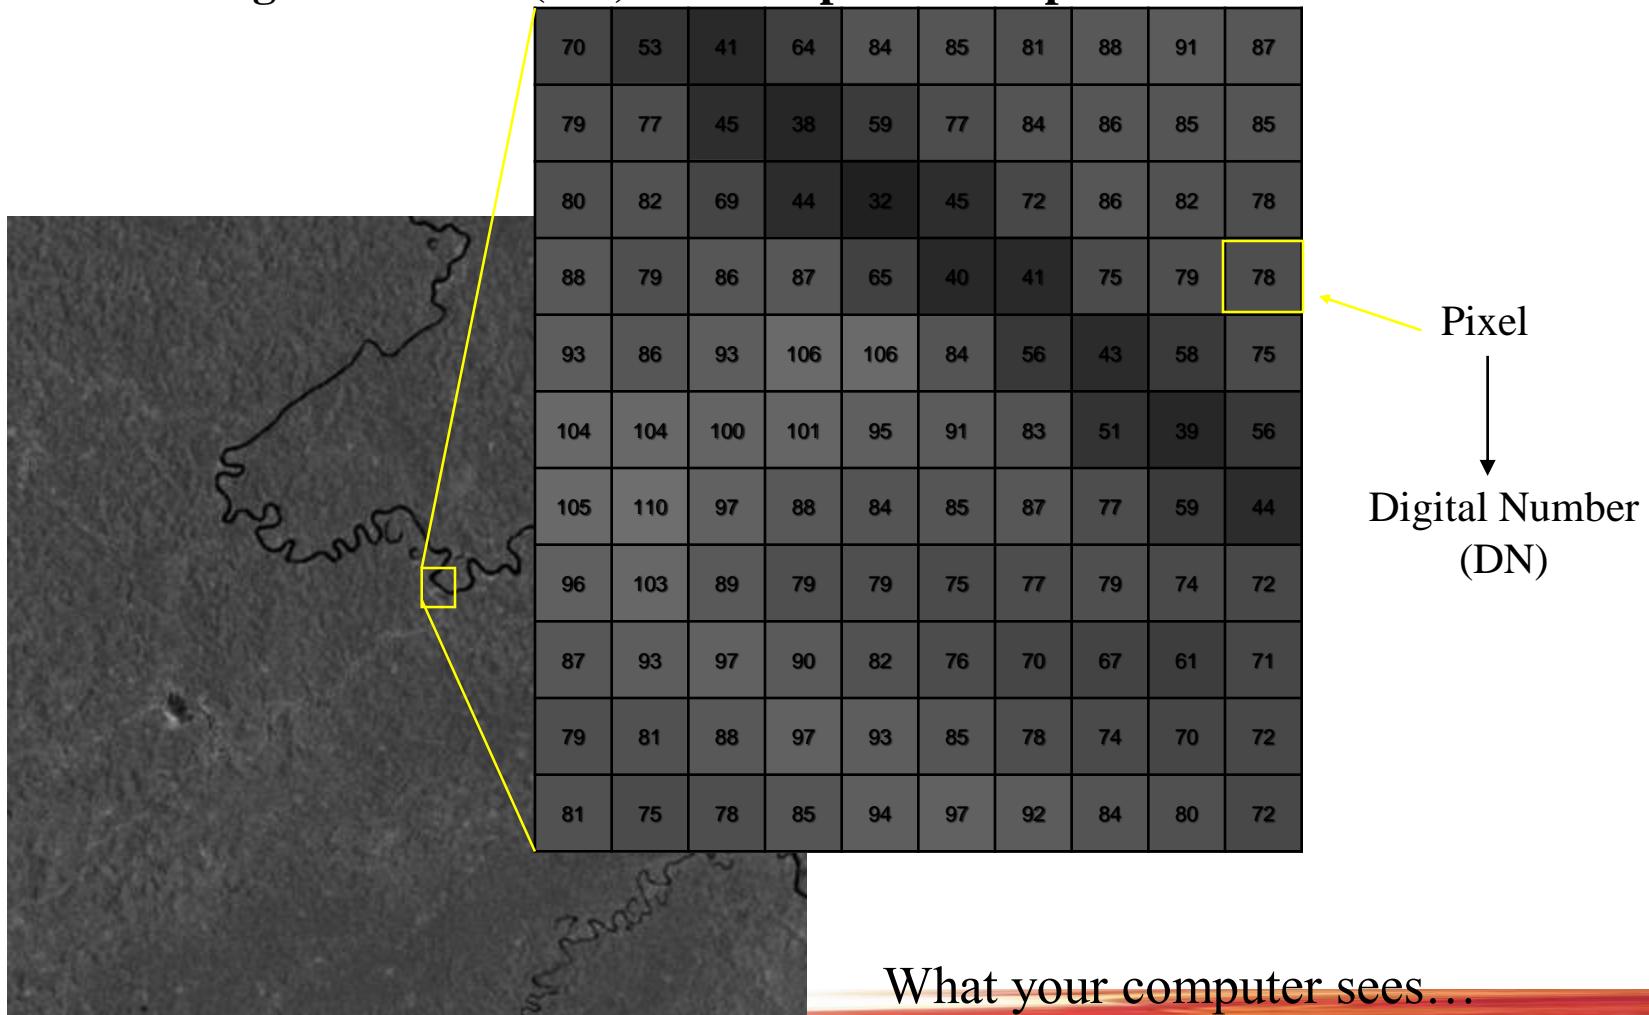



Resolution

Ability of the system to render the information at the **smallest discretely separable quantity** in terms of distance (spatial), wavelength band of EMR (spectral), time (temporal) and radiation (radiometric).

The Four Resolutions of Remote Sensing

Spatial

A Measure of discernable physical dimension of the surface from the image

Spectral

A measure of the width of the wavelength (bandwidth) which is used to generate the image. *Narrower the bandwidth higher the spectral resolution*

Radiometric

A measure of what is the minimum change in radiance that can be measured

Temporal

Frequency of Observation: Number of days between two consecutive observation for a particular ground target under *similar viewing geometry*



Spatial Resolution

- The physical dimension on earth is recorded
- It refers to the amount of detail that can be detected by a sensor.
- Detailed mapping of land use practices requires a much greater spatial resolution

Instantaneous Field of View (IFOV)

It is defined the solid angle through which a detector is sensitive to radiation.

$$\text{IFOV} = D/F \text{ radian}$$


$$\text{GRE} = \text{IFOV} \times H$$

where, **GRE=Ground Resolution Element**


D=detector dimension,

F=focal length, and


H=flying height

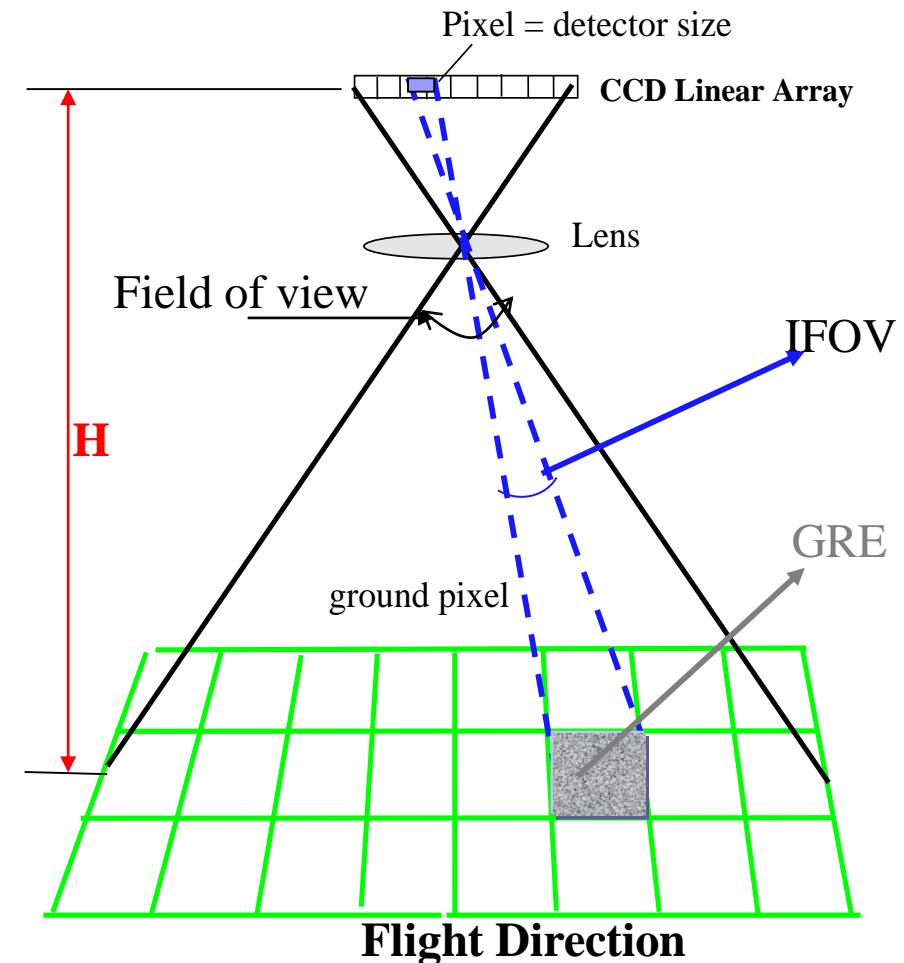

INFORMATION CONTENT VS RESOLUTION

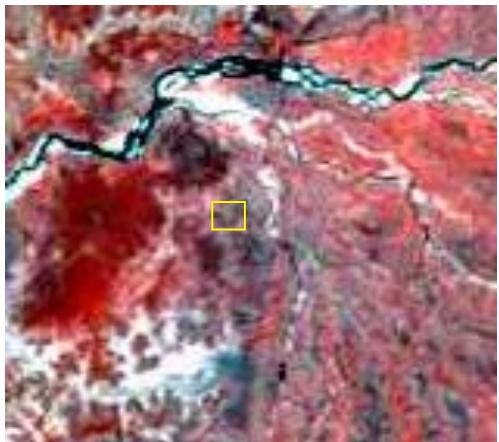

A) OCM (360m)

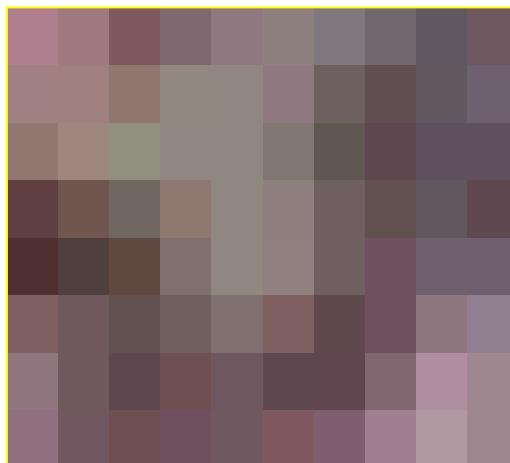


B) 360m (OCM)




C) 188m (WiFS)



D) 72m (LISS-I)

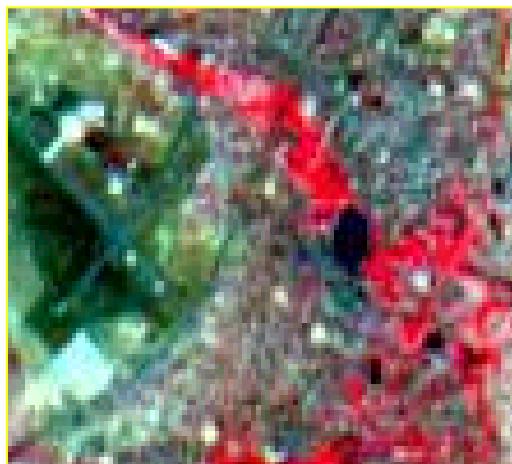

E) 36m (LISS-II)

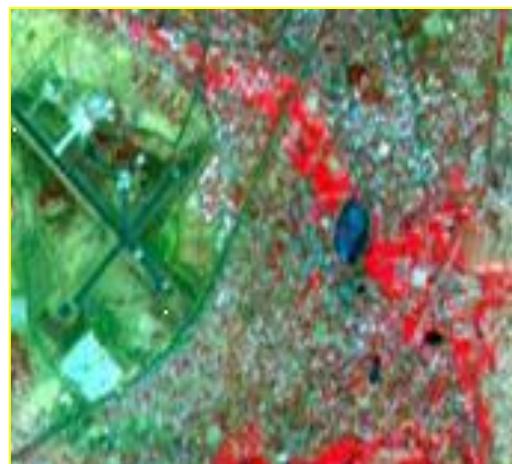


F) 23m (LISS-III)



G) 5.8m (IRS 1C PAN)

‘A’ is from a scene from IRS Ocean Colour Monitor (OCM). The area in the small square marked ($\approx 4\text{km} \times 4\text{km}$) is shown in various resolutions from B to G.



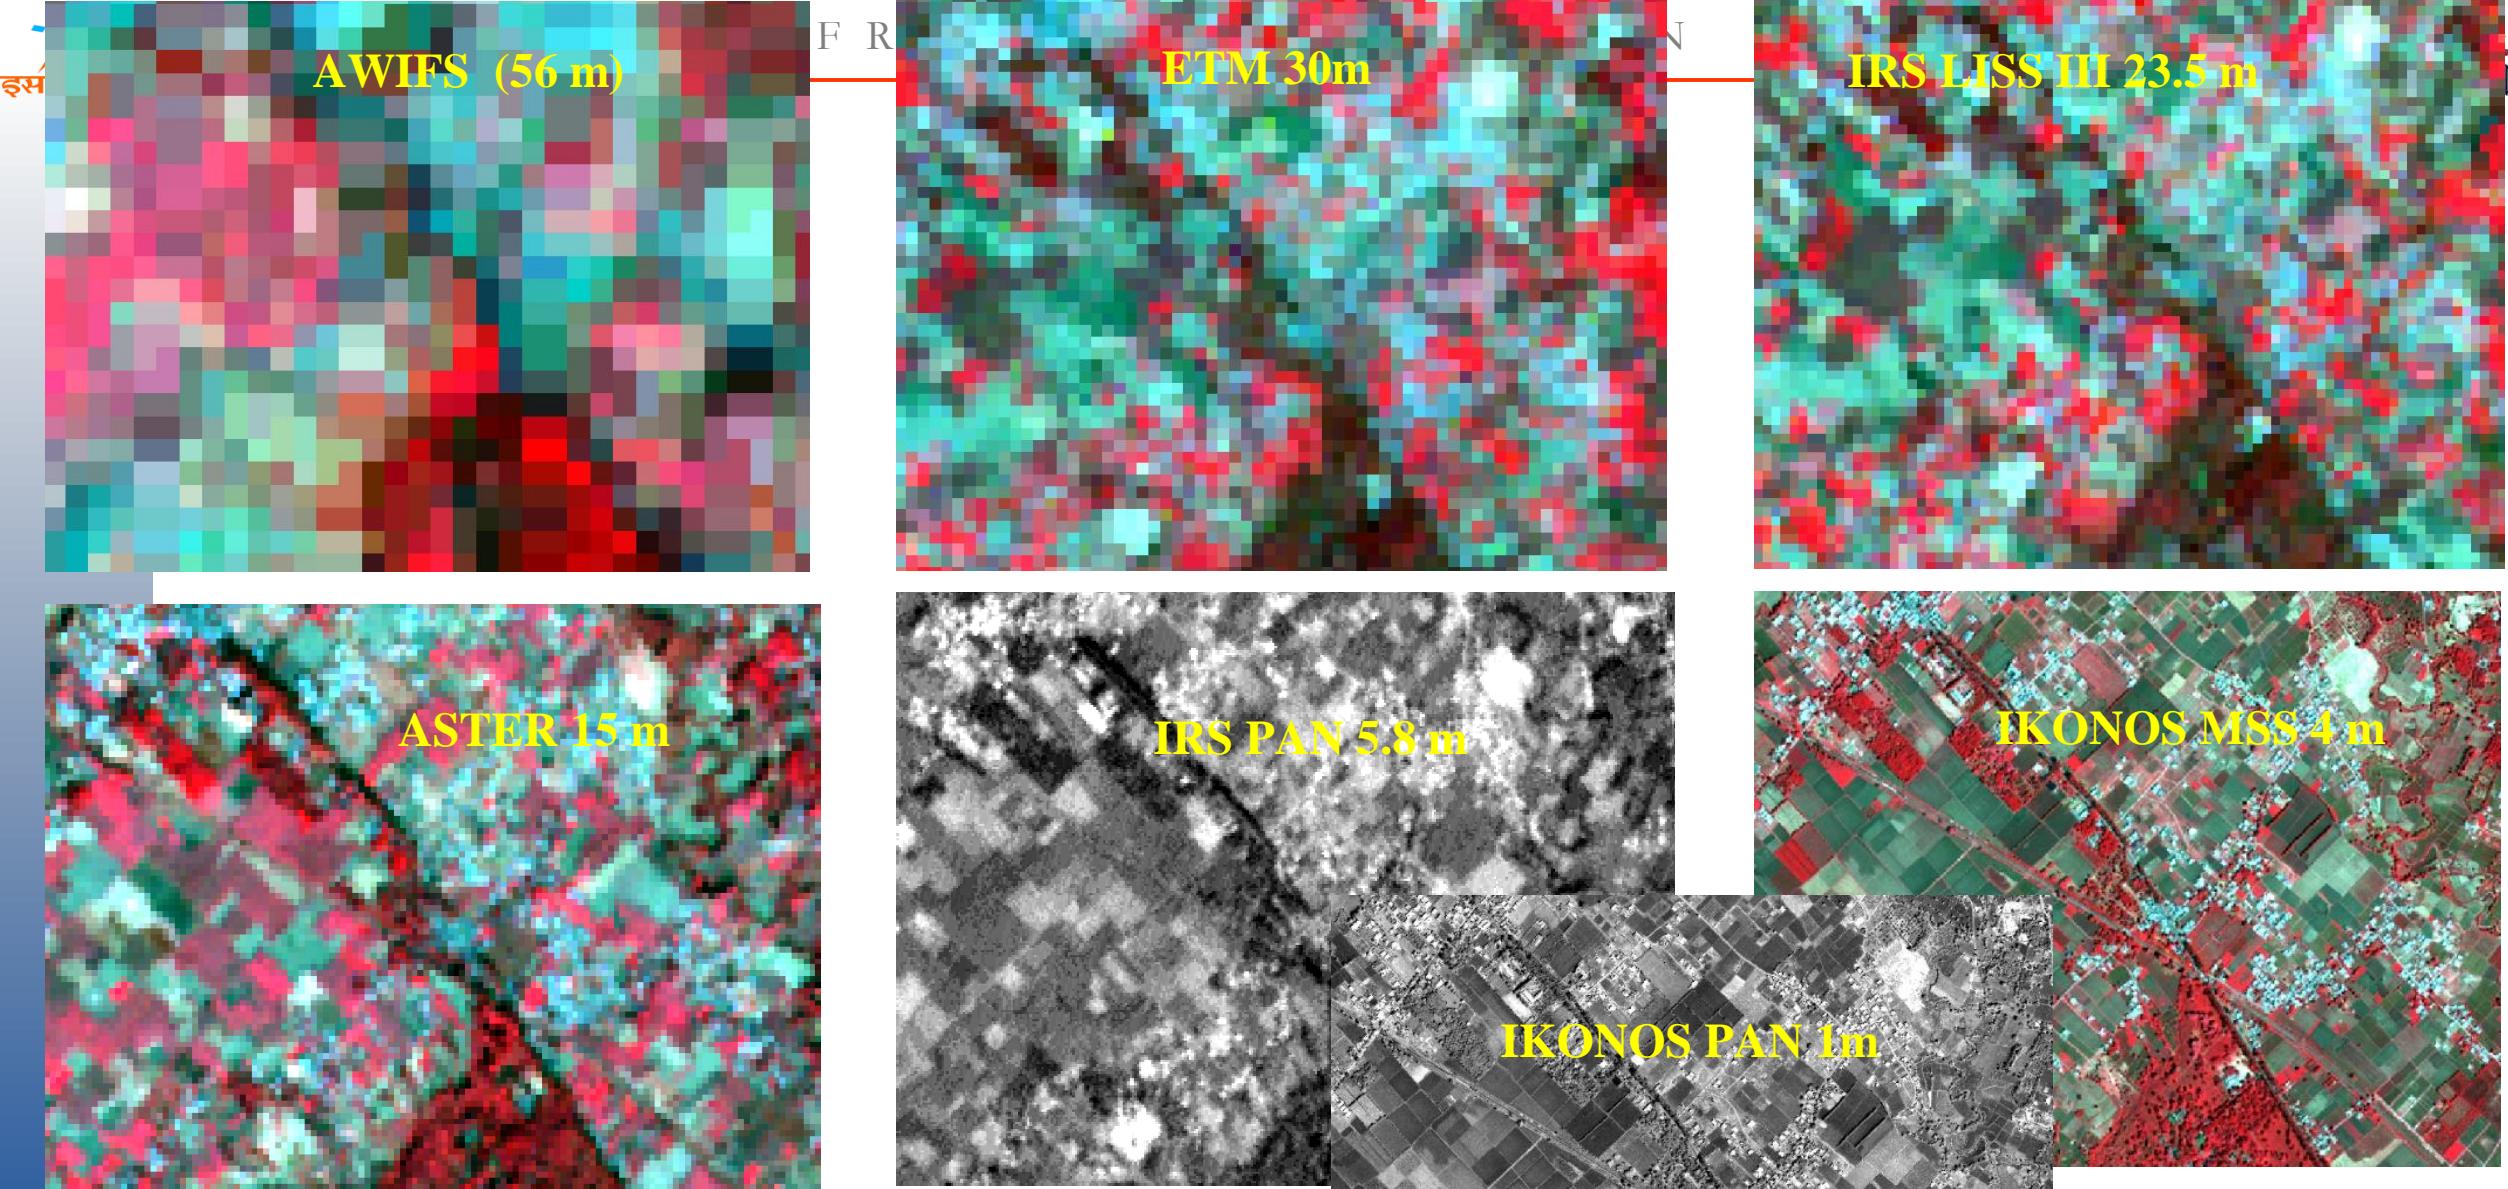


Spatial Resolution

Smallest discernible detail in an image






Meteorology	Cloud patterns, movement Water vapor Analysis	1-2 Kms. 8 Kms.
Oceanography	Ocean Color Monitoring (Chlorophyll, Sediment Map, Yellow Substance, Sea Surface Temp. Mapping)	300-1100 m
Land use	Crop monitoring, Forest Mapping, Hydrology etc. Cartography, Urban Planning	20-30 m 2-6 m
	Military Surveillance	≤ 1 m

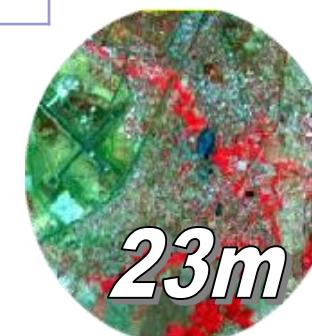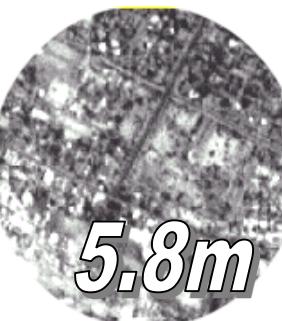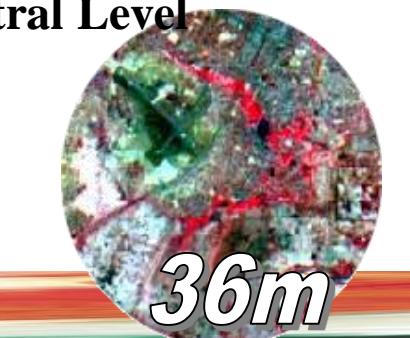



- **1 Km to 1 m spatial Resolution**
- **24 Days to every 30 mts. Repetitivity**
- **1 Million scale to Cadastral Level**





Spectral Resolution


- Spectral resolution describes the ability of a sensor to define fine wavelength intervals.
- This refers to the **number of bands in the spectrum** in which the instrument can take measurements.
- Higher spectral resolution = better ability to exploit **differences in spectral signatures**

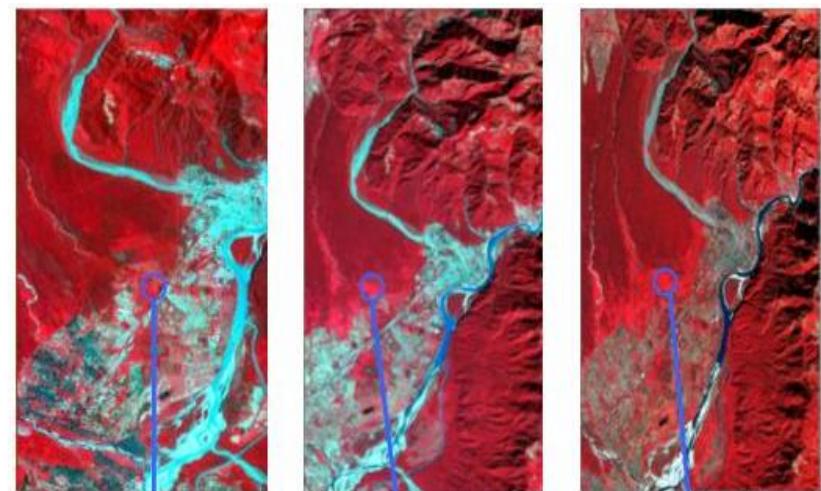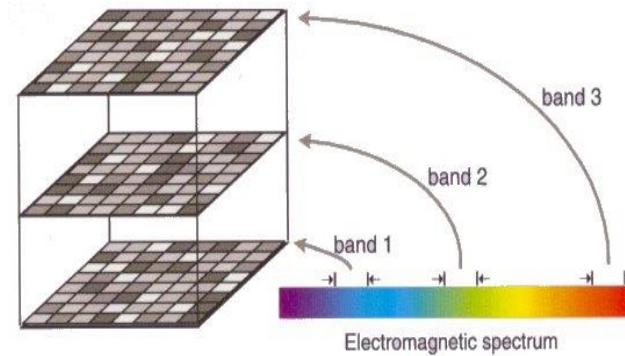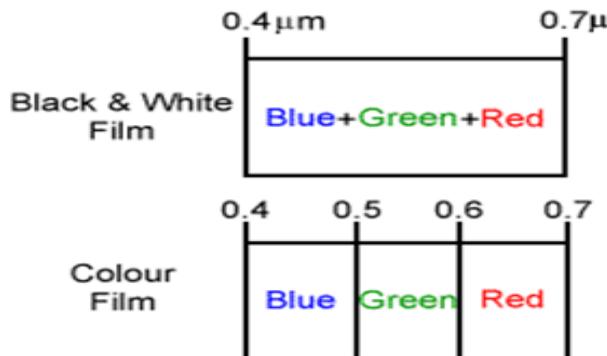

- panchromatic
- multispectral
- hyperspectral



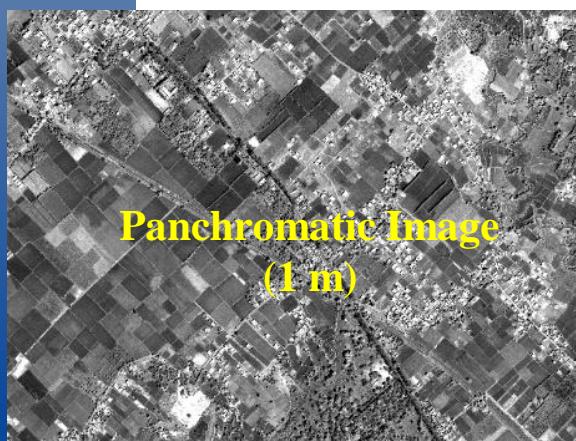
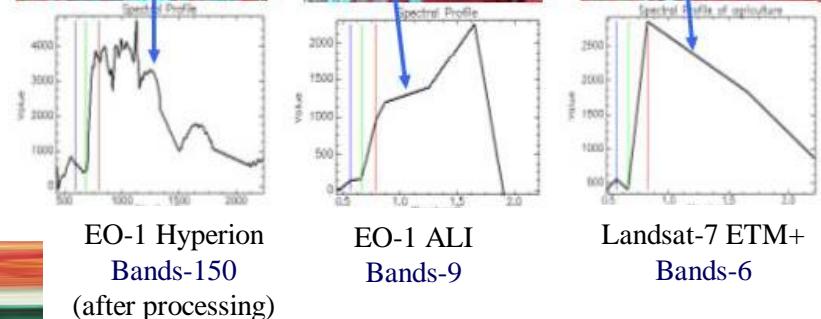


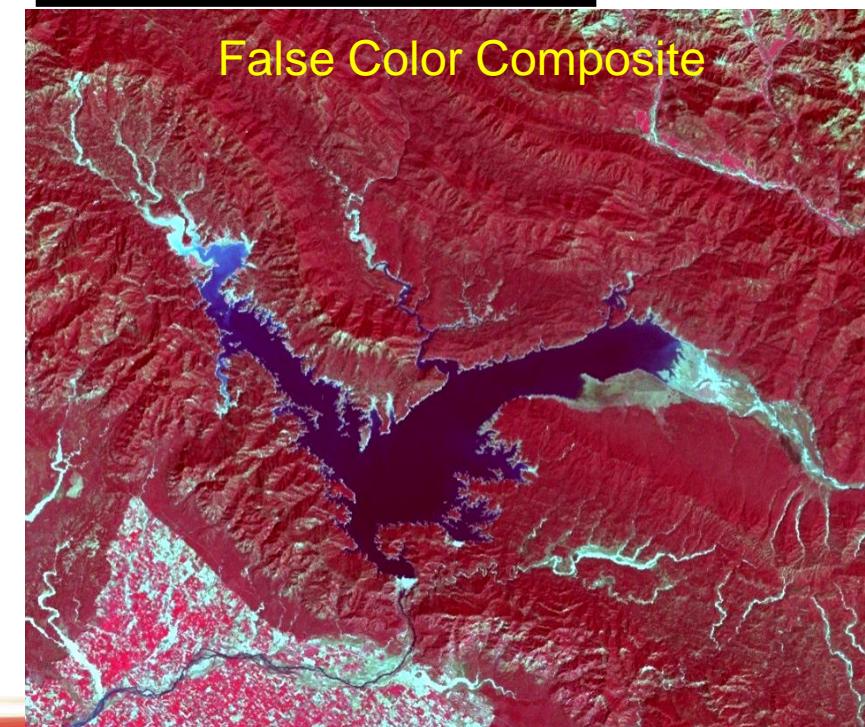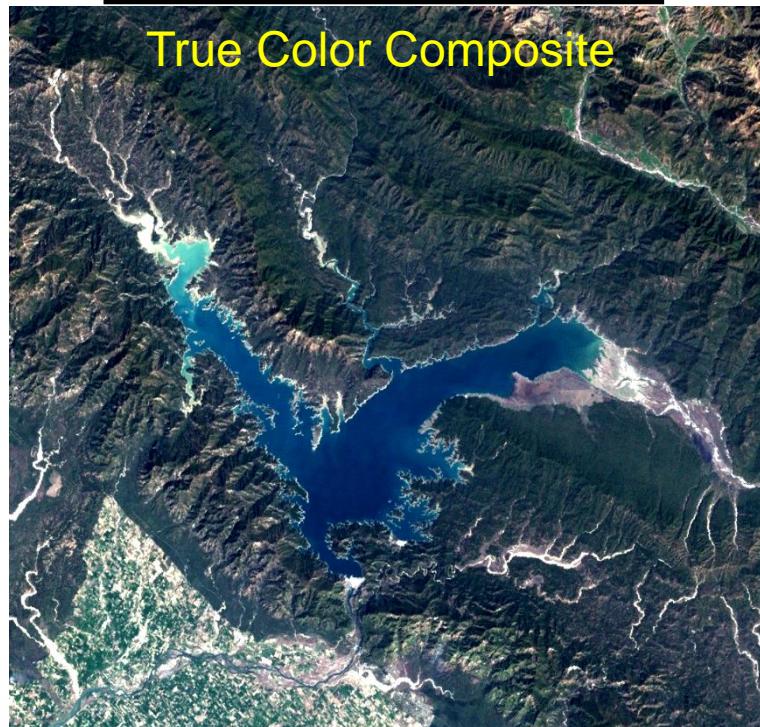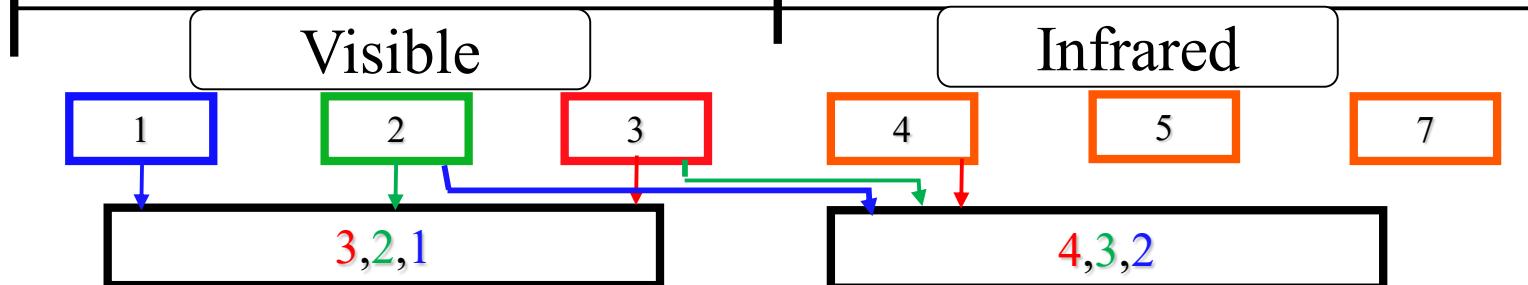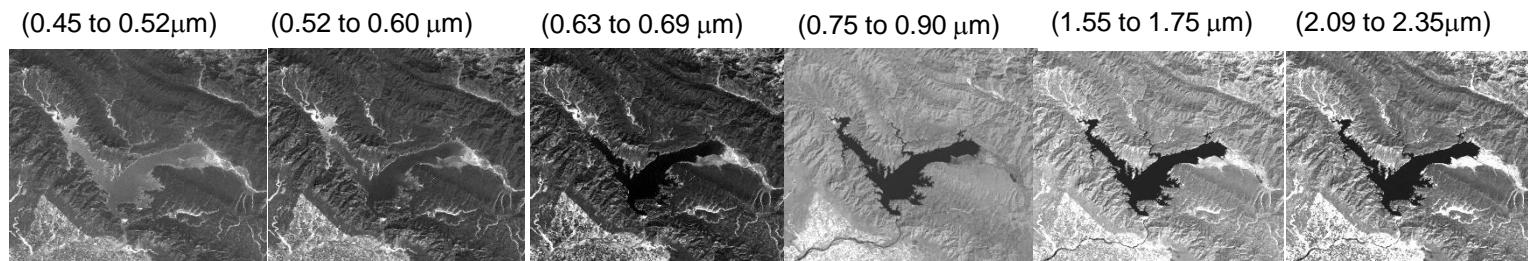



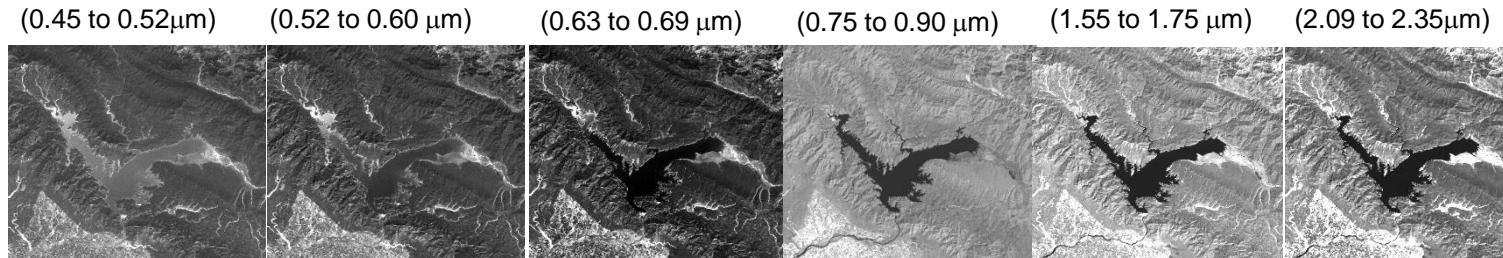


Band	Wavelength (μm)	Principal applications
1	0.45 – 0.52 (blue)	Penetration of clear water: bathymetry; mapping of coastal waters; chlorophyll absorption; distinction between deciduous and coniferous vegetation.
2	0.52 – 0.60 (green)	Records the green reflectance peak of vegetation; assesses plant vigor; reflectance from turbid water.
3	0.63 – 0.69 (red)	This band operates in the chlorophyll absorption region and is best for detecting roads, bare soil.
4	0.75 – 0.90 (NIR)	This band is used to estimate biomass. Although it separates water bodies from vegetation and discriminates soil moisture, it is not as effective as B3 for road identification.
5	1.55 – 1.75 (MIR)	Band 5 is considered to be the best single band overall. It discriminates roads, bare soil, and water. It also provides a good contrast between different types of vegetation and has excellent atmospheric and haze penetration. Discriminates snow from clouds,
7	2.09 – 2.35 (MIR)	This band is useful for discriminating mineral and rock types and for interpreting vegetation cover and moisture.

Reflectance differs by wavelength

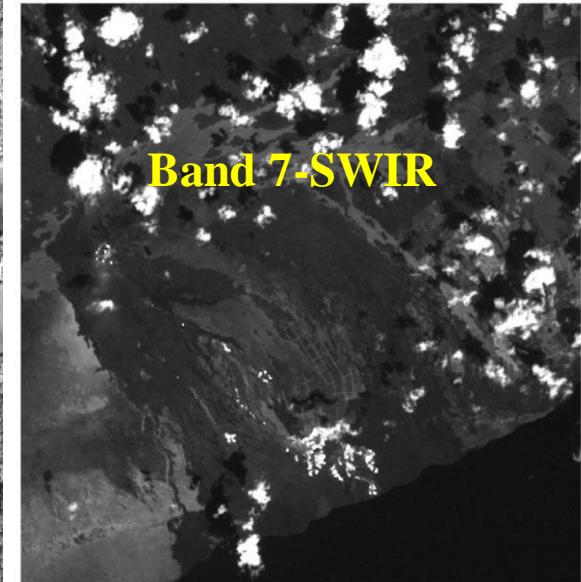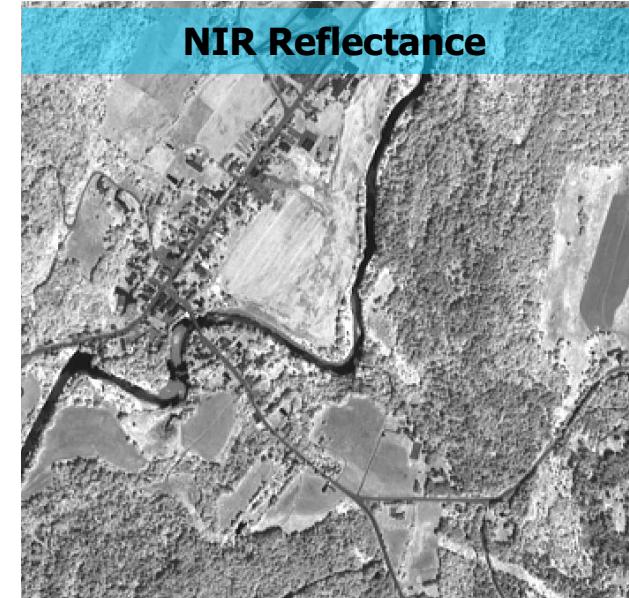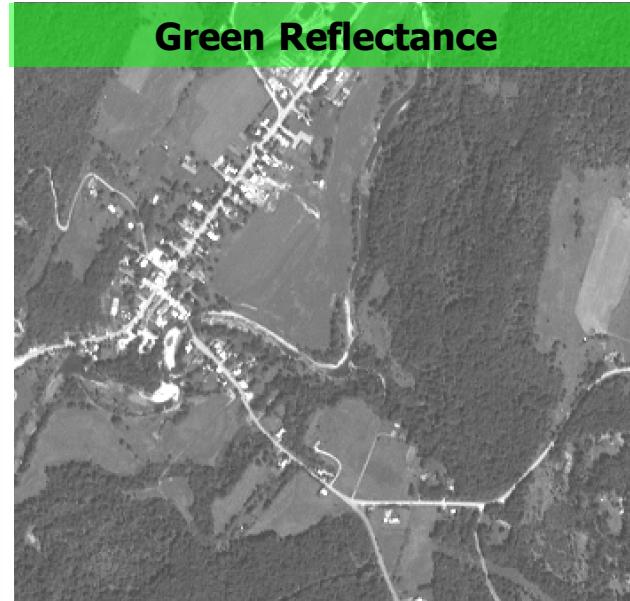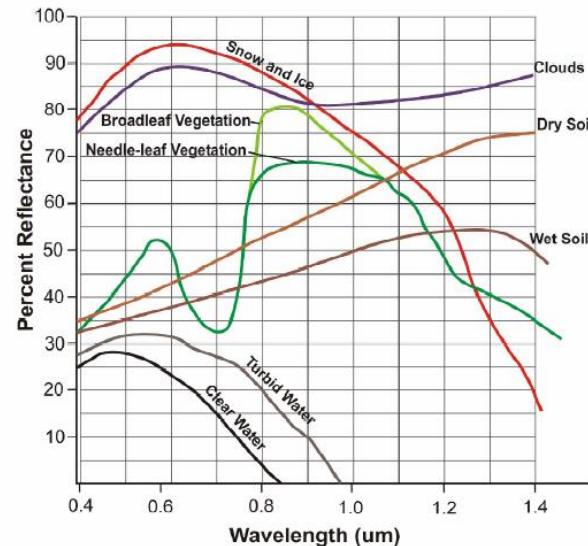

Spectral Signature of different Land cover Features

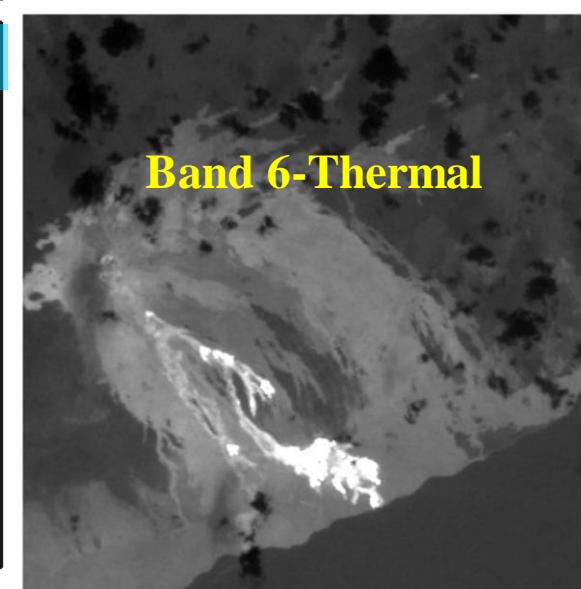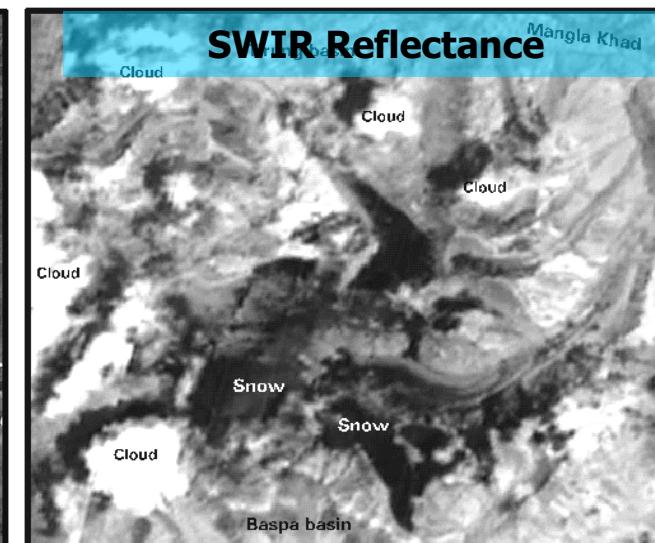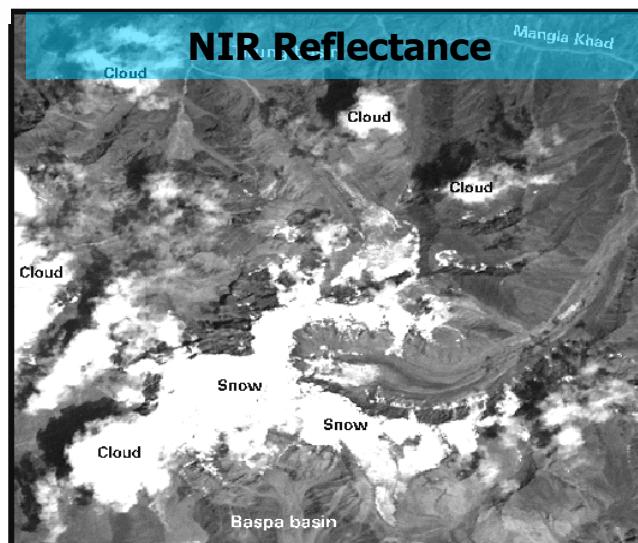

IRS LISS-3 Both cloud and snow have higher reflectance in visible and hence cannot be discriminated (except from shadow). In SWIR, low reflectance of snow can discriminate snow from cloud.




Radiometric Resolution


- It describes the actual information content in an image.
- Sensitivity to the magnitude of the electromagnetic energy determines the **radiometric resolution**.
- The **radiometric resolution of an imaging system** describes its ability to discriminate very slight differences in energy.
- The finer the radiometric resolution of a sensor, the more sensitive it is to detecting small differences in reflected or emitted energy.

Radiometric Resolution

2^(number of bits) = number of grey levels

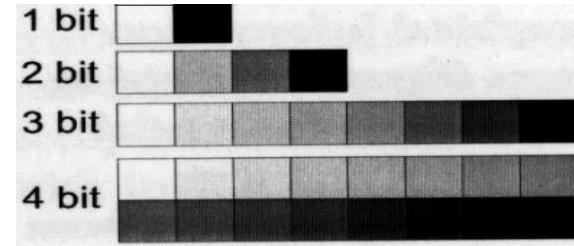

256 colors

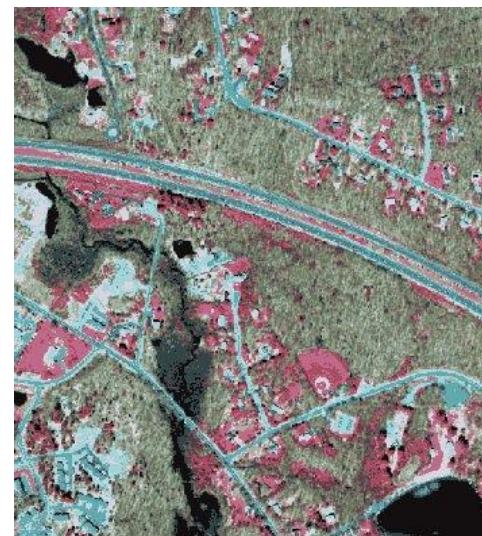

16 colors



2 colors



Temporal Resolution

- Represents the **frequency** with which a satellite can **re-visit** an area of interest and acquire a new image.
- Depends on the instrument's field of vision and the satellite's orbit





Application demand

Meteorological → hourly need to monitor clouds

Oceanographic → 2-3 days of repetivity

Stereo viewing → 0-1 days of repetivity

Vegetation monitoring → 5 days of repetivity

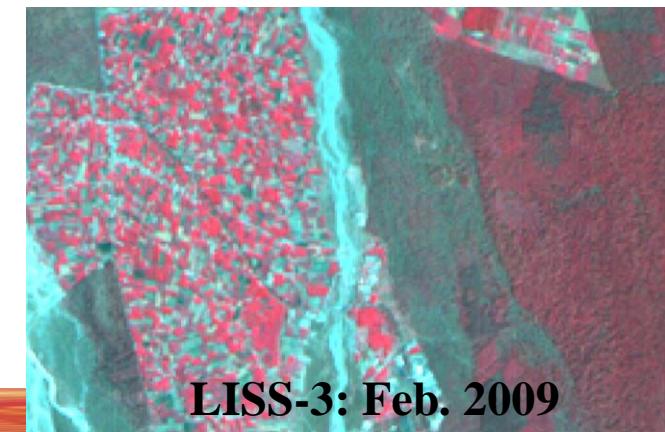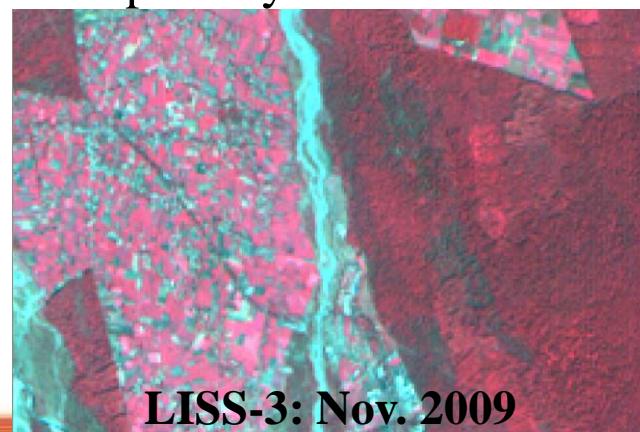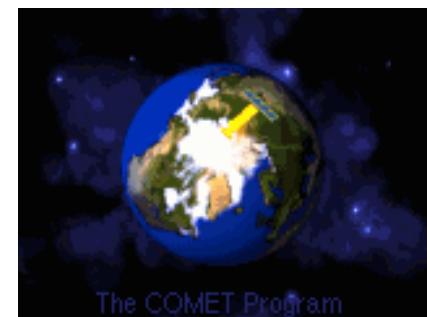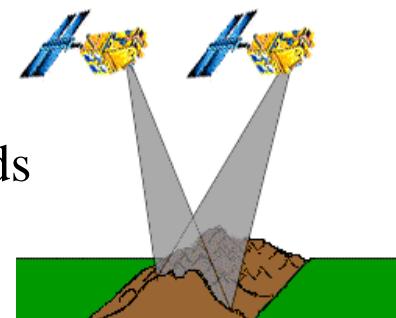





Europe		MIDDLE EAST	North America			Asia	
France	ESA	Israel	USA		Canada	India	Japan
SPOT1-86 10m			LANDSAT5- 85 30m				
SPOT2-90 10m	ERS1-92/00 radar		LANDSAT6- 93				
SPOT3-93/96	ERS2-95 radar		EARLYBIRD- 98	IKONOS1-99 1m	RADARSAT- 95	IRS1C-95 6m	
SPOT4-98 10m	ENVISAT- 2001 Radar		LANDSAT7- 99 15m	IKONOS2-99 1m		IRS1D-97 6m	
		EROS A/1- 00 2m	QUICKBIRD- 01 0.6m	ORBVIEW- 01 1m		IRS P6-2003 5.8m	
SPOT5-02 3m+HRS10		EROS B/1- 02 1m		ORBVIEW- 02 1m	RADARSAT- 03	CARTOSAT1- 2.5m	ALOS 2.5m
SPOT6-2012 SPOT7-2014	Sentinel-1A & 1B-2014 & 2016 Sentinel-2A & 2B-2015 & 2017		Landsat8-2013			CARTOSAT2 & 2S- <1m Cartosat-3 =0.25 m	
Distribution							
SPOT IMAGING	Miscellaneous Copernicus	Imagesat	SI-EOSAT, Earthwatch, Orbimage, USGS	RADARSAT	NRSC-EOSAT	Jaxa	

Landsat Series of Satellites



- First launched in 1972
 - 185Km swath
 - Multi Spectral Scanner (MSS)
 - 4 bands (Green, Red, NIR x2)
 - 80m ground resolution
 - First Series - Landsat 1,2 and 3
- Landsat 4 Launched 1983
 - Thematic Mapper (TM)
 - Seven bands -Blue, Green, Red, NIR, SWIR x 2, TIR
 - 30m ground resolution
- Landsat 6 failed after Launch
- Landsat 7 launched 1999
 - Additional 15m panchromatic
- **Landsat Data Continuity Mission (LDCM) launched on February 2013 with OLI and TIRS**
 - Additional coastal blue, Cirrus bands
 - **Two thermal band of 100 m resolution**

SPOT (Système pour l'observation de la Terre) Series of Satellite

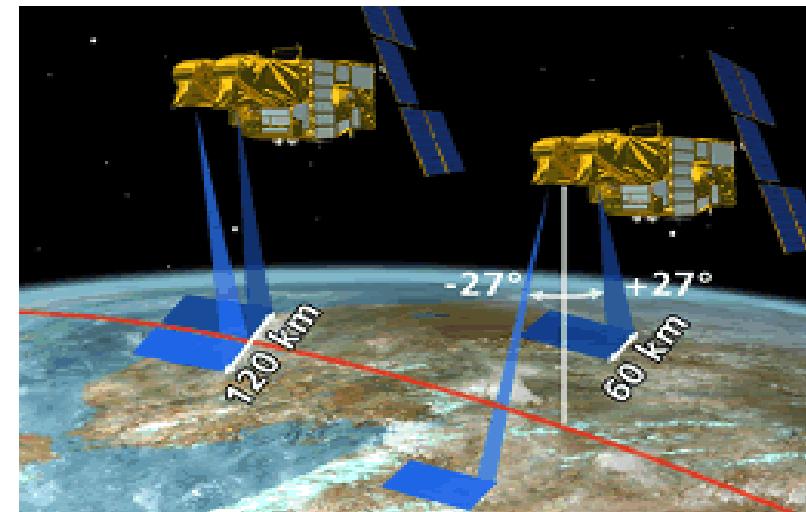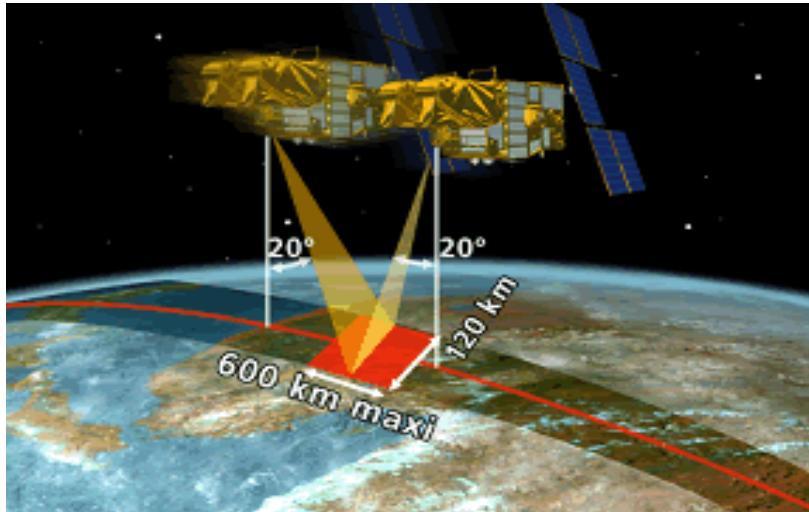

- French satellite SPOT-1 was launched in 1986
- Two modes of operation
- Off nadir look capability
- Stereo capability

*SPOT-6 (2012) & SPOT-7 (2014) form a constellation of Earth-imaging satellites designed to provide continuity of high-resolution, wide-swath data up to 2024

ALOS (Advanced Land Observing Satellite)

Satellite	Launched	Sensor	Altitude (Km)	Spatial Resolution (m)	Swath Width (km)	Spectral Bands (μm)	Repeat Coverage (days)
ALOS-1	2006	PRISM (Panchromatic Remote-sensing Instrument for Stereo Mapping)	702	2.5	35	Band PAN (VIS) -0.52 to 0.77	46
		AVNIR-2 (Adv. visible and near-infrared radiometer (type 2))		10	70	Band 1 (VIS)-0.42 to 0.5 Band 2 (VIS)-0.52 to 0.6 Band 3 (VIS)-0.61 to 0.69 Band 4 (NIR)-0.76 to 0.89	
		PALSAR(Phased Array L-band Synthetic Aperture Radar)		10 (100)	70 (300)	Band 1 (1.27 GHz) (SAR-L)	
ALOS-2	2014	CIRC (Compact Infrared Camera)	628	200	96	Band 1 (TIR)- 8 to 12	14
		PALSAR(Phased Array L-band Synthetic Aperture Radar-2)		3 (100)	25 (490)	Band 1 (1.257 GHz) (SAR-L)	

The Evolution

NG, DEHRADUN


RISAT-2BR1

Cartosat-3

RISAT-2B



Since IRS-1A, the First Operational Remote Sensing Satellite

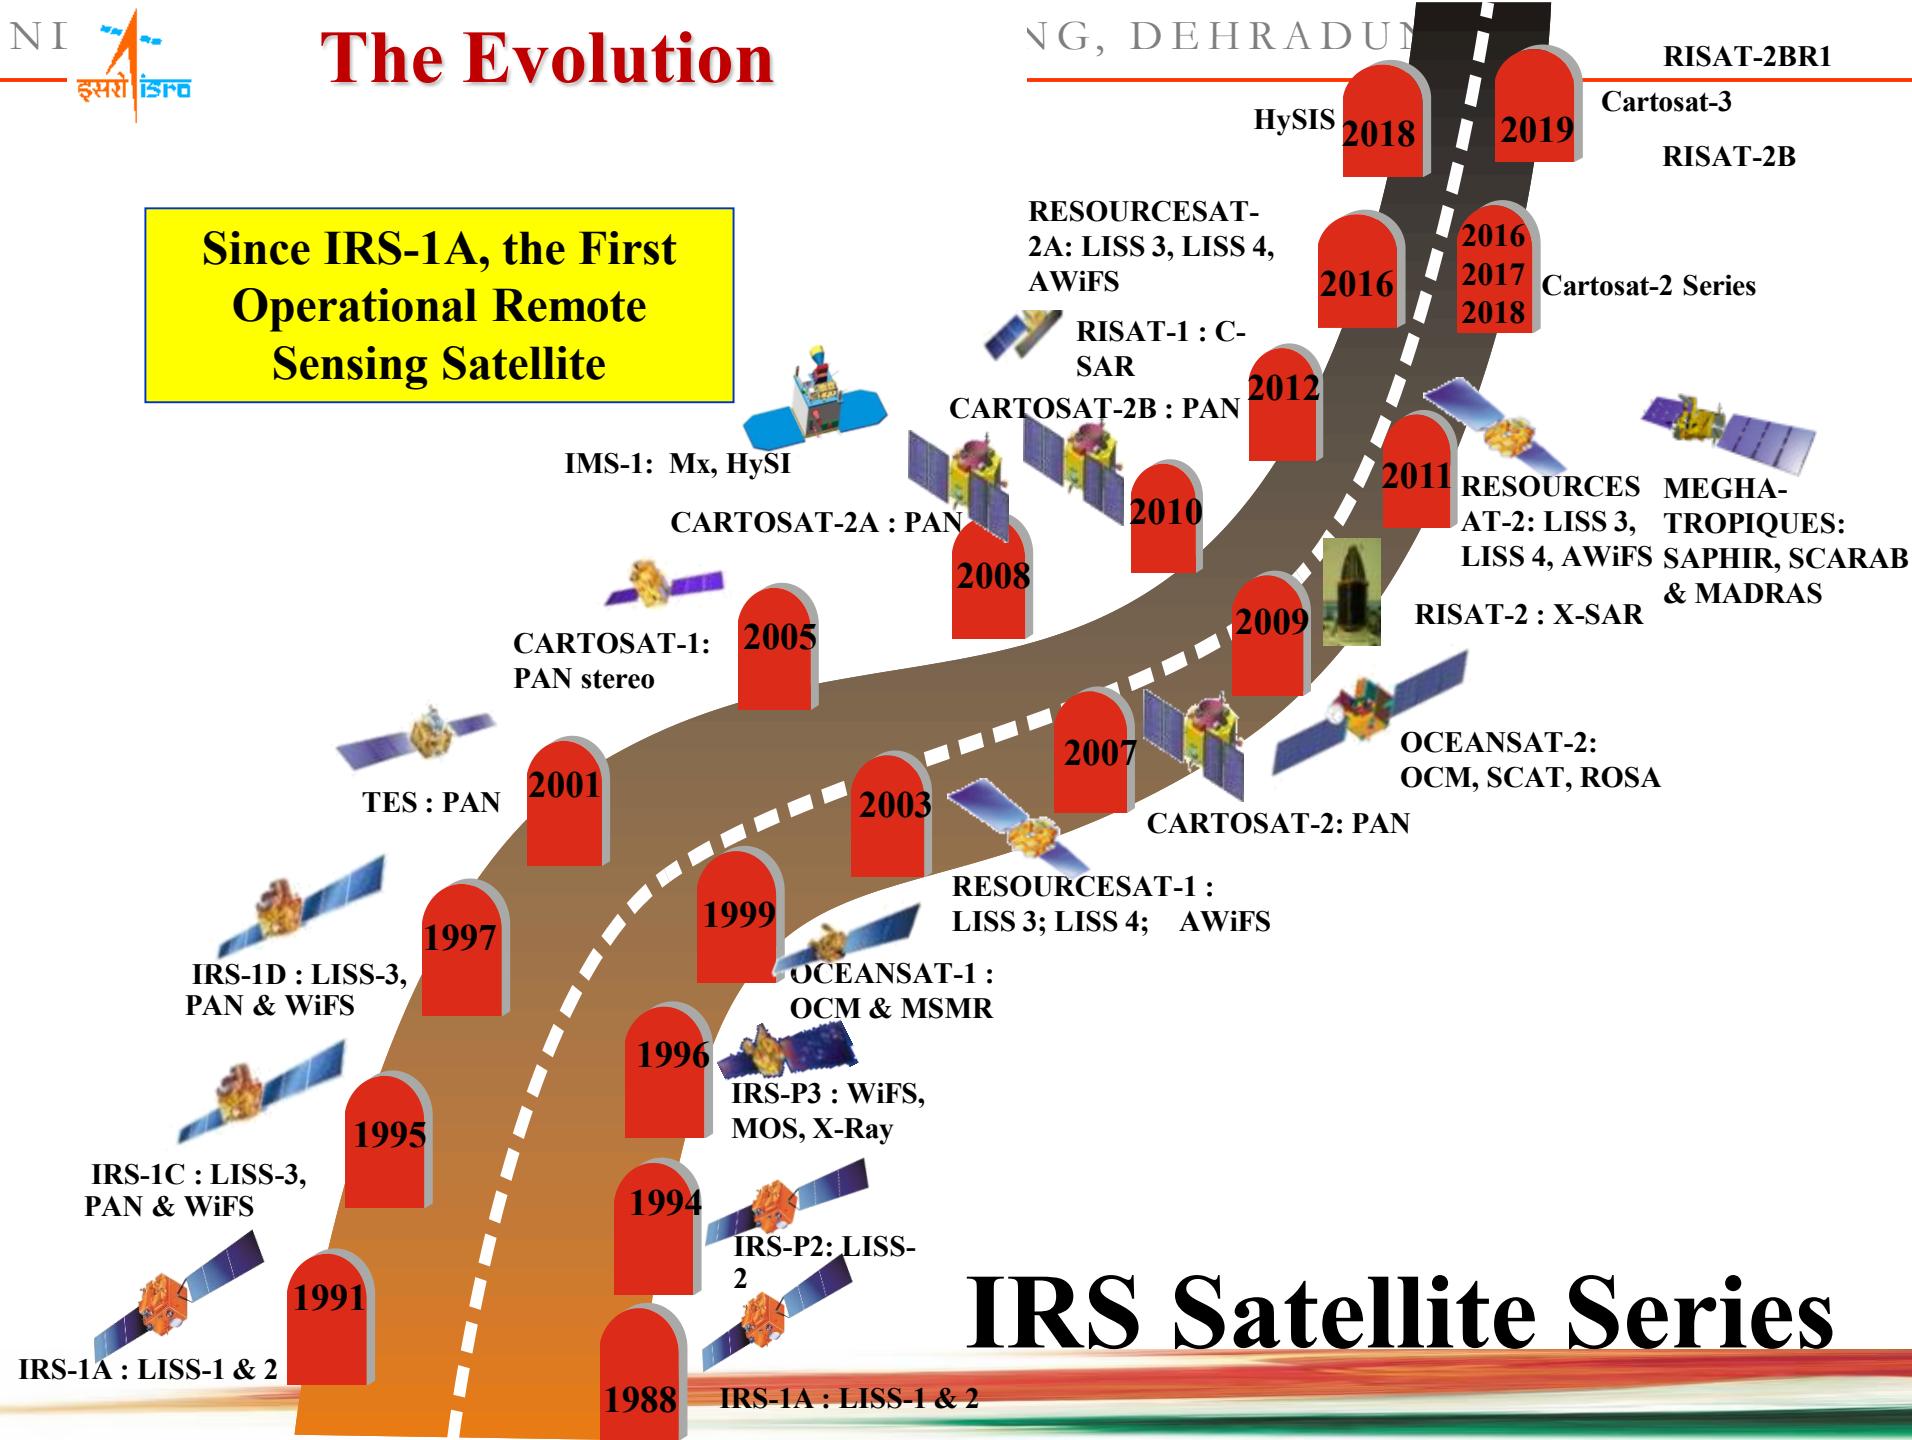

IRS Satellite Series



IRS Satellite Series

□ IRS -1A, 1B	– LISS (Linear Imaging Self-Scanning)-I – LISS-II	– 72 m – 36 m
□ IRS -1C, 1D	– WiFS (Wide Field Sensor) – LISS-III – PAN (Panchromatic)-II	– 188 m – 23.5 m – 5.8 m
□ *Resourcesat-1, 2 & 2A	– AWiFS (Advanced Wide Field Sensor) – LISS-III – LISS-IV	– 56 m – 23.5 m – 5.8 m
□ IRS-P5 (CARTOSAT-1)	– PAN	– 2.5 m
□ CARTOSAT-2 A	– PAN	– 1.8 m
□ CARTOSAT-2 B	– PAN	– <1 m
□ CARTOSAT-2 Series	– HRMX (High Resolution Multispectral) – PAN	– 2 m – 0.63 m
□ Cartosat-3	– HRMX (High Resolution Multispectral) – PAN	– 1 m – 0.25 m

*Note- Radiometric resolution of AWiFS, LISS-III & LISS IV is better in Resourcesat-2 & 2A in comparison with Resourcesat-1 satellite

Hyperspectral Sensors


- ISRO - NASA AVIRIS – NG

- HYSIS (Hyperspectral Imaging Sensor)


SAR Sensors



RISAT-2
(2009)

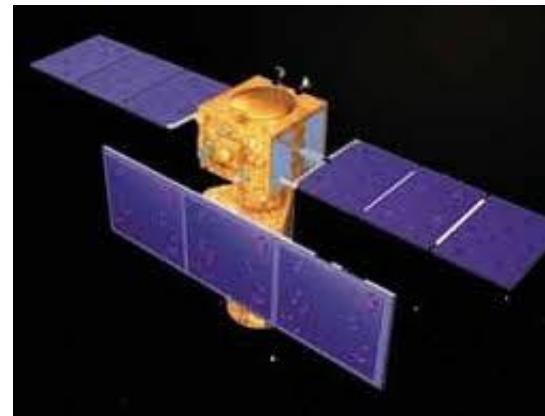

RISAT-1
(2012)

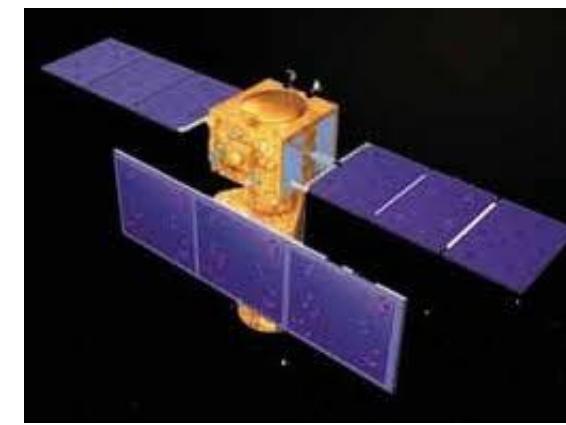


RISAT-2B
(2019)




IRS : LISS-I CAMERA




IRS : LISS-II CAMERA

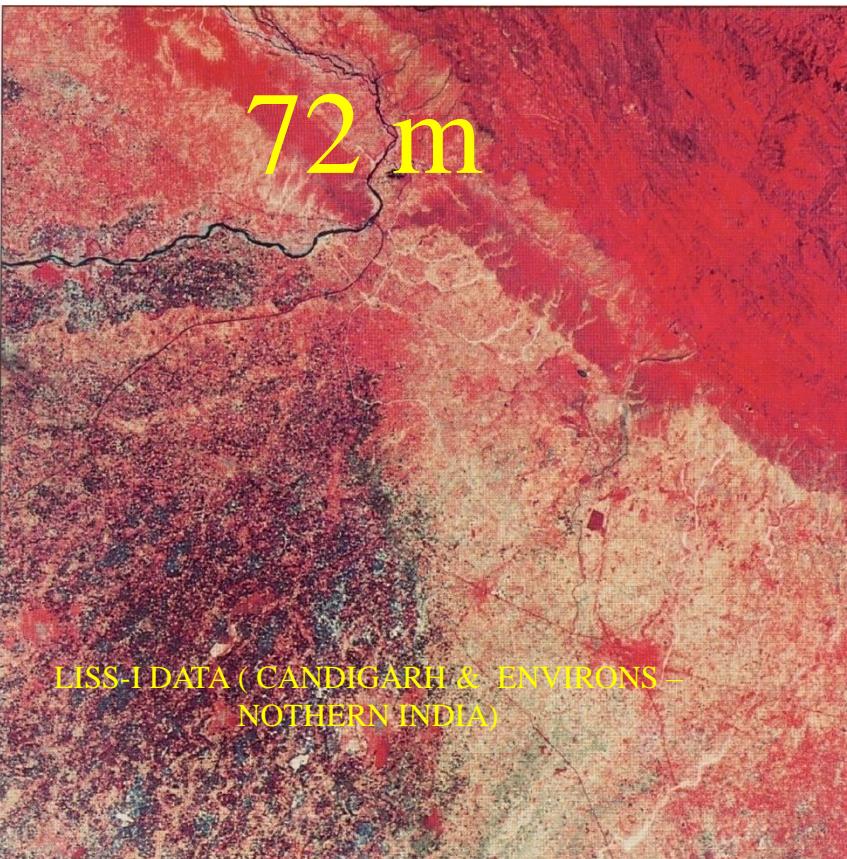



LISS-I DATA (CANDIGARH & ENVIRONS – NORTHERN INDIA)

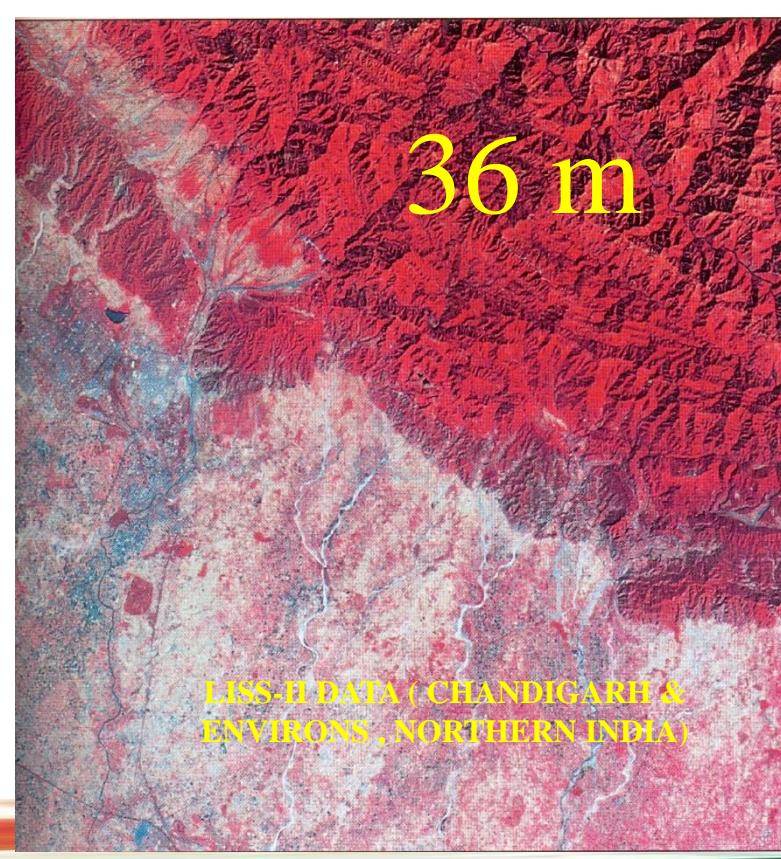


LISS-II DATA (CHANDIGARH & ENVIRONS , NORTHERN INDIA)

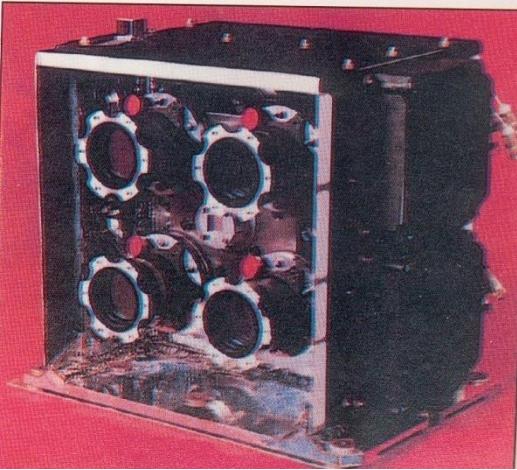


IRS : LISS-III CAMERA

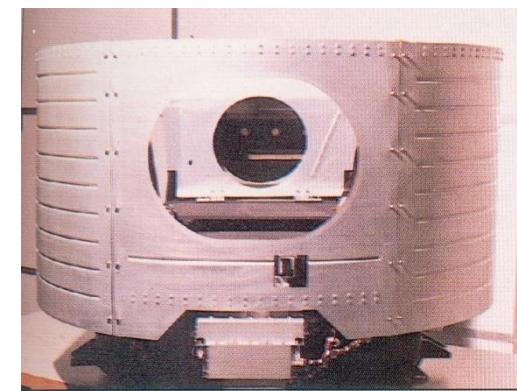
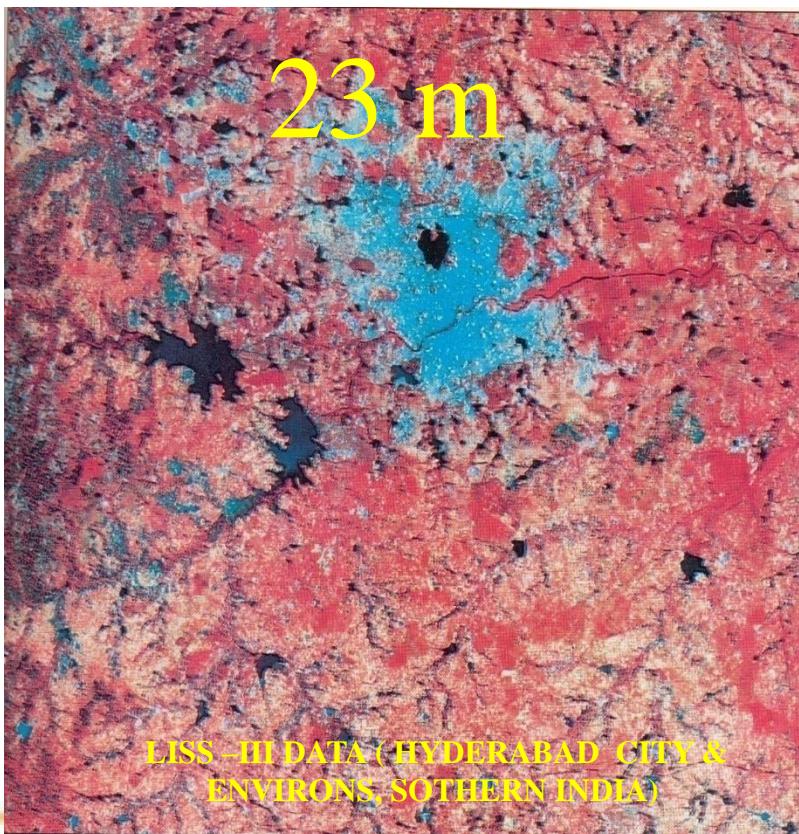




IRS : PAN CAMERA

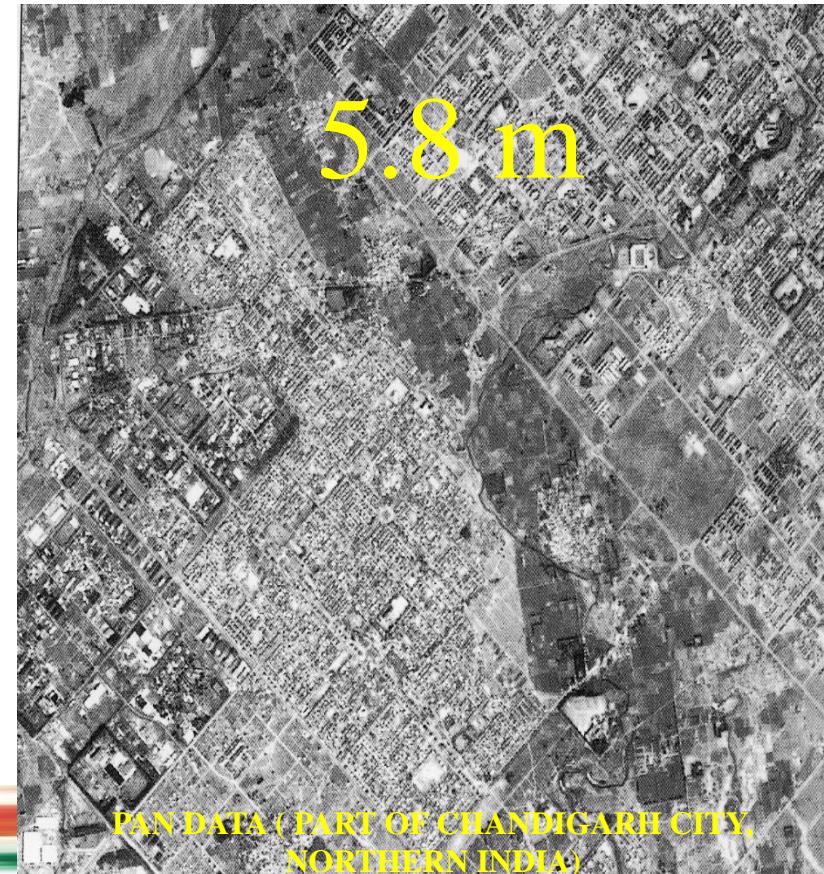

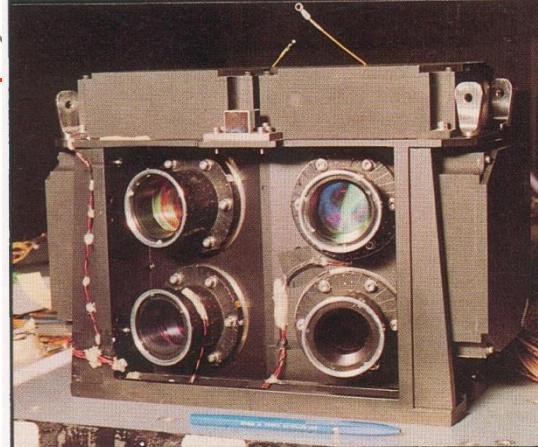


IRS : WiFS CAMERA

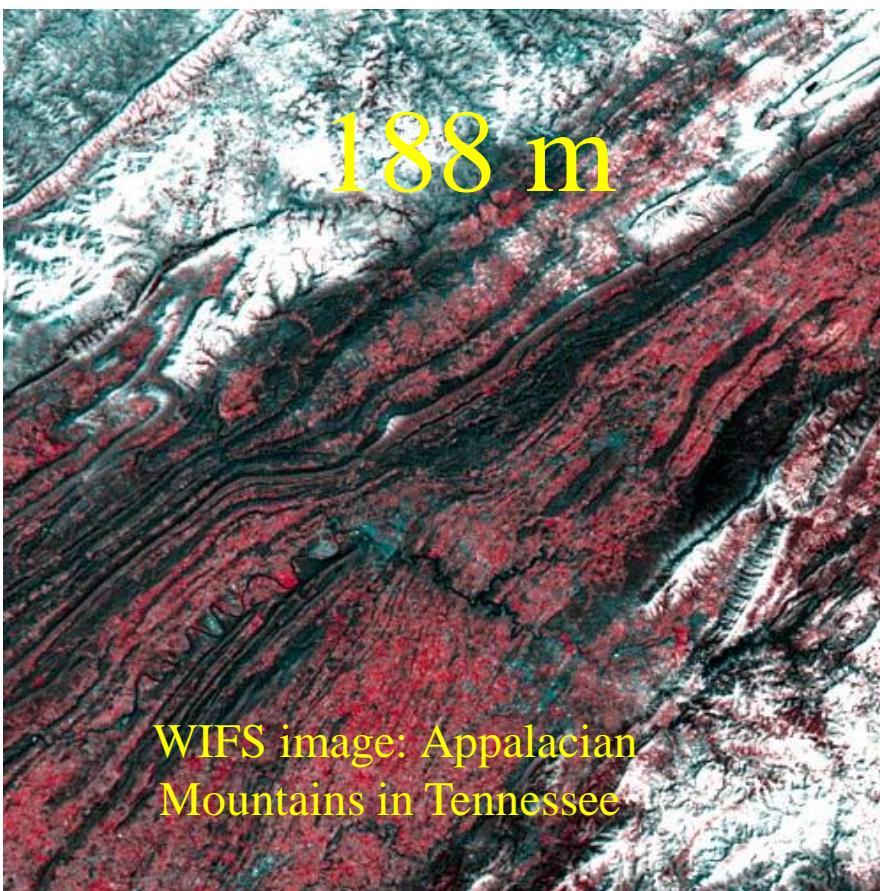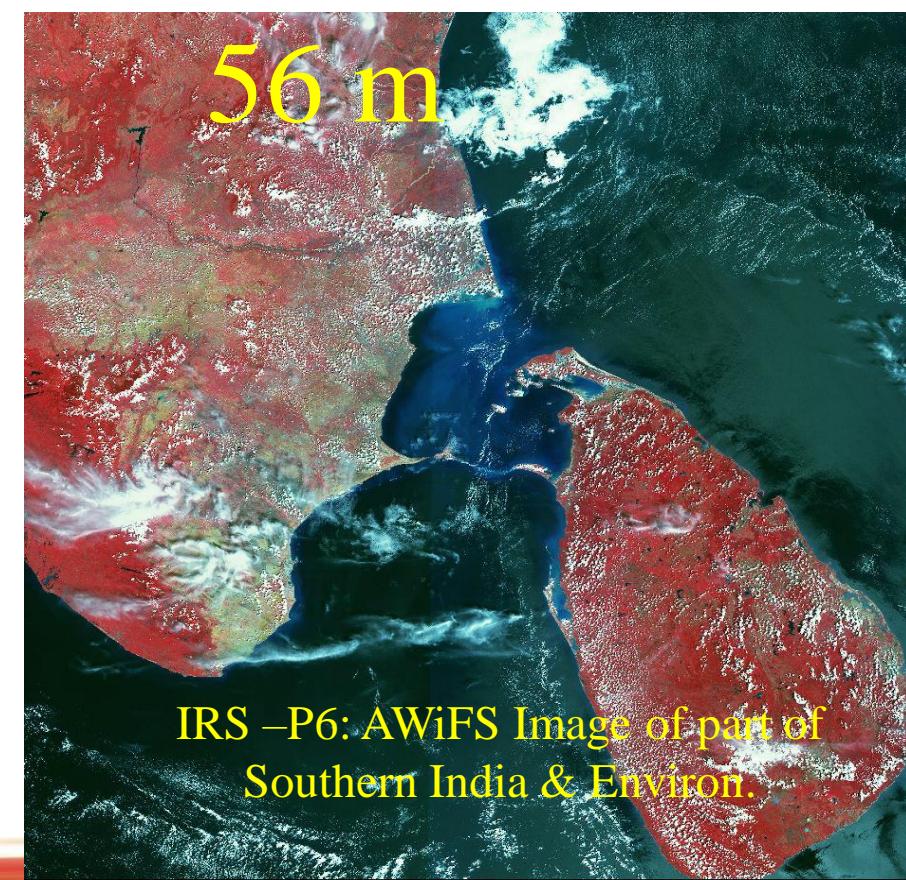WIFS image: Appalachian
Mountains in TennesseeIRS –P6: AWiFS Image of part of
Southern India & Environ.

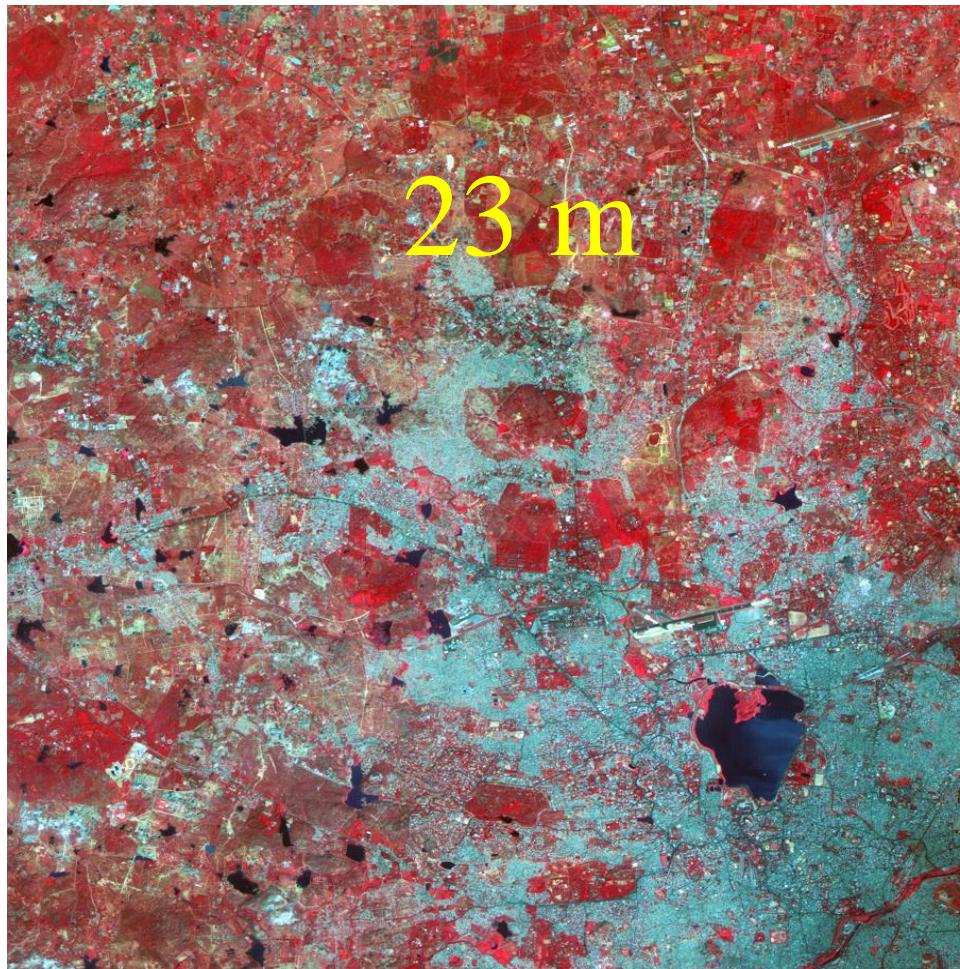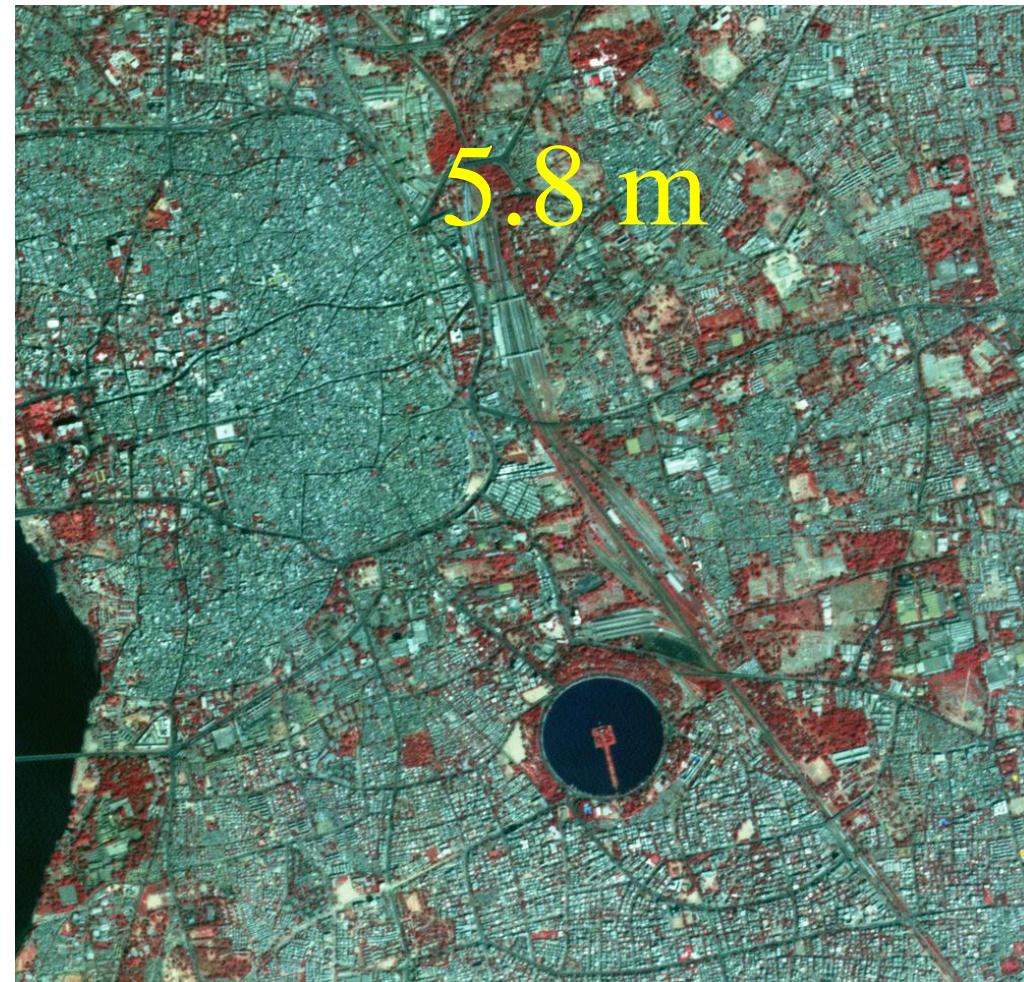IRS –P6: LISS –III**Image of part of Hyderabad City****IRS –P6: LISS –IV****Image of part of Ahmedabad City**


Cartosat-Images

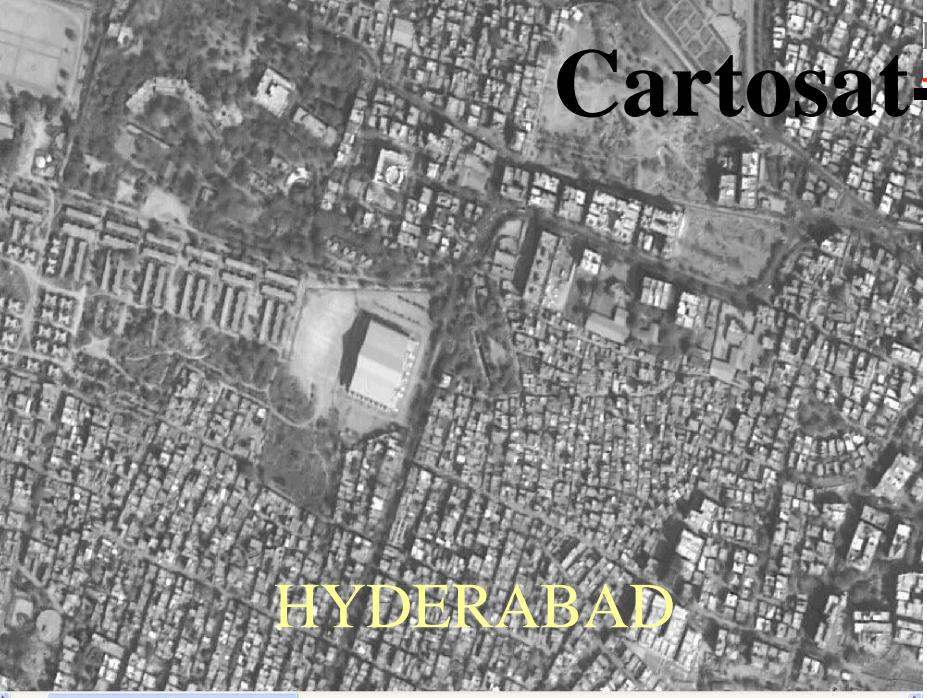

HYDERABAD




BANGALORE

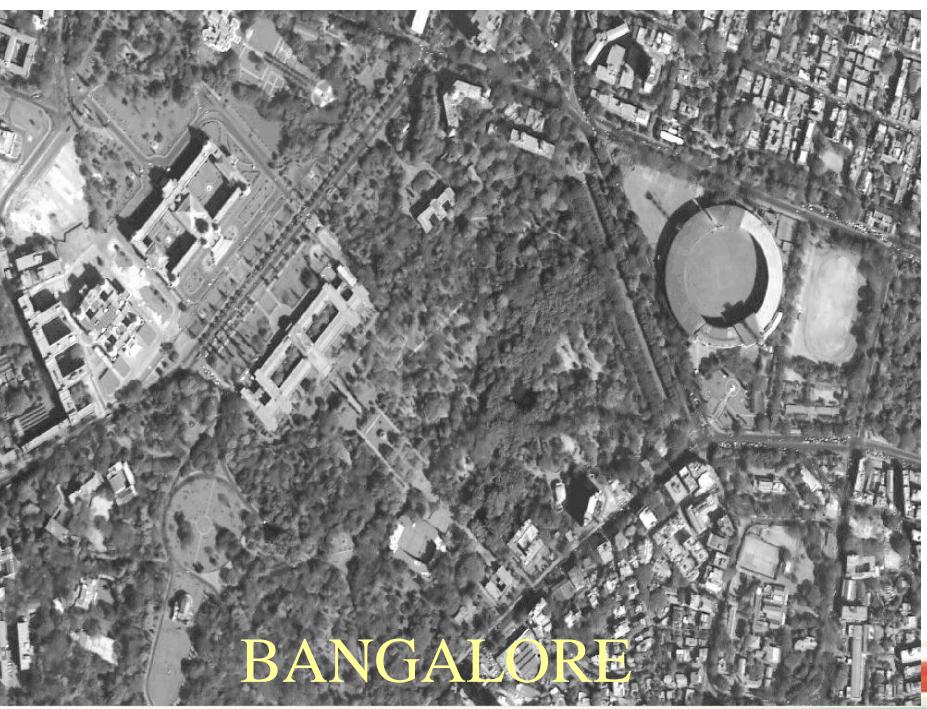

BANGALORE



AUSTRALIA

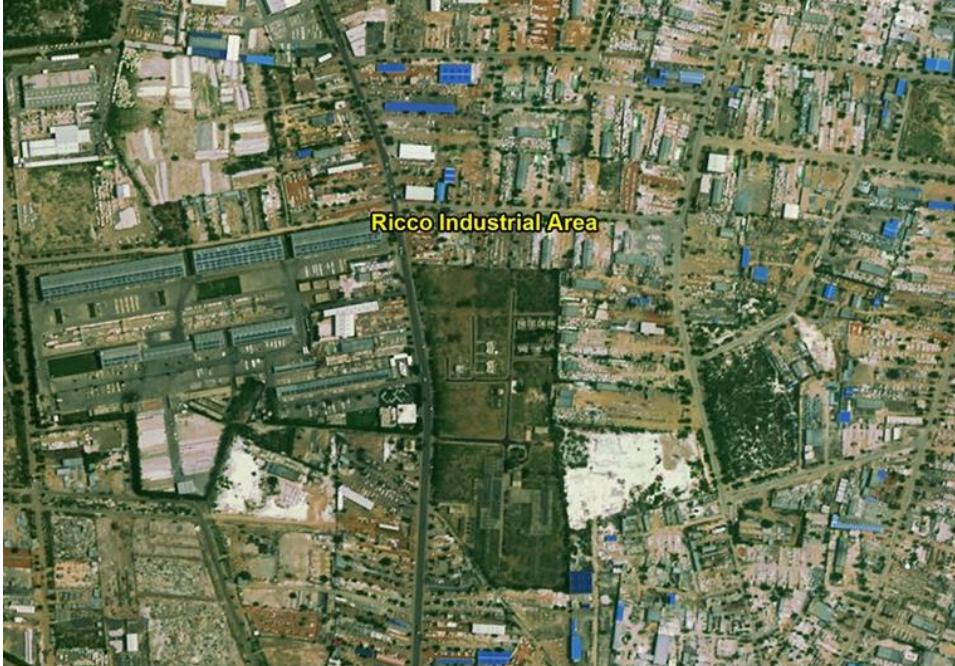Cartosat-2Series Image Part of Kishangarh city**Cartosat-2Series Image Part of Indore city****Cartosat-3 Image: The Khalifa stadium in Doha, Qatar**



Indian EO Missions in the near future

- Resourcesat 3 & 3A : ALISS 3; 10m, 925 km, Atmcorr
- Oceansat 3 & 3 A: OCM of 13 bands, Ku band scat
- RS Sampler 3S & 3SA: 1.25m stereo imaging
- GISAT 1 : HR Mx VNIR; 50m, SWIR; 1.5 km, HYSI



High Spatial Resolution satellites

IKONOS

It is first commercial satellite to deliver near photographic quality imagery of anywhere in the world from space.

QUICK BIRD

WORLDVIEW 1, 2, 3 & 4

GEOEYE

PLEIADES-1A & 1B

SKYSAT-1 & 2

KOMPSAT-1, 2, 3 & 3A

IKONOS Image of IIRS



Fukushima Daiichi Nuclear Power Plant

**GeoEye-1 Image,
Nov. 15, 2009**



**IKONOS Image
March 17, 2011**





KOMPSAT 3

REMOTE SEN

WORLD VIEW-3



KOMPSAT 3A

WORLD VIEW-4



Meteorological Satellites

- Designed specifically for **weather prediction and monitoring**
- Advantages of **global coverage** at very high temporal resolution.
- Various types of meteosats are as follows:
 - e.g. →**NOAA series** (operated by U.S. named after the National Oceanic and Atmospheric Administration). These have near-polar, sun-synchronous orbits.
 - GOES, GSAT & INSAT** series satellites are in geo-stationary orbits.
- India has launched **GSAT & INSAT series** satellites, which are telecommunication, and meteorological satellites.



Where to find this information?

- 100's of websites of vendors, distributors, value adders, NGO's Or
<http://www.itc.nl/research/products/sensordb/searchsat.aspx>

- Real time satellite tracking
<http://www.satview.org/>



Data Browsing Websites

- <http://earthexplorer.usgs.gov/>
- <http://www.nrsc.gov.in/>
- <http://www.spaceimaging.com>
- <http://www.digitalglobe.com>
- <http://edcimswww.cr.usgs.gov/pub/imswelcome/>
- <http://www.spotimage.fr/home>
- <http://bhuvan-noeda.nrsc.gov.in/download/download/download.php>
- <https://scihub.copernicus.eu/dhus/#/home>
- <http://glcf.umiacs.umd.edu/data/>
- <http://www.usgs.gov/pubprod/>
- <https://cross.restec.or.jp/cross-ex/topControl.action?language=en-US>



Thank You



The material for the presentation has been compiled from various sources- books, tutorials, IRS satellite-datasets and several resources on the internet