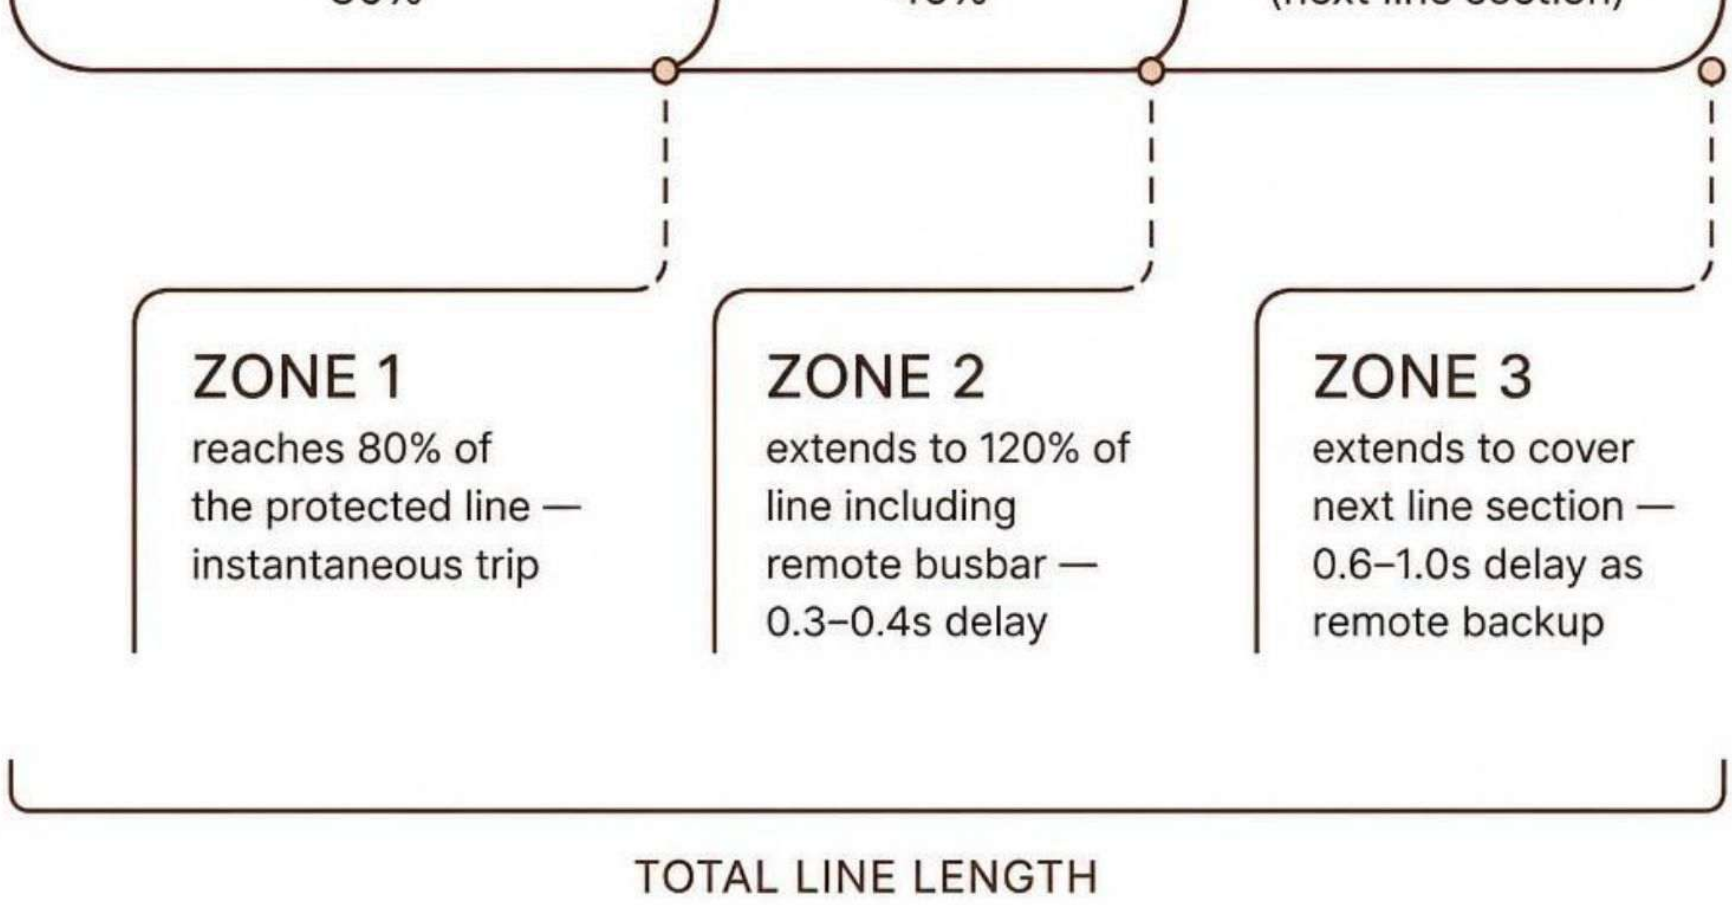

ZONE 1
reaches 80% of the protected line — instantaneous trip
ZONE 2
extends to 120% of line including remote busbar — 0.3–0.4s delay
ZONE 3
extends to cover next line section — 0.6–1.0s delay as remote backup
TOTAL LINE LENGTH