

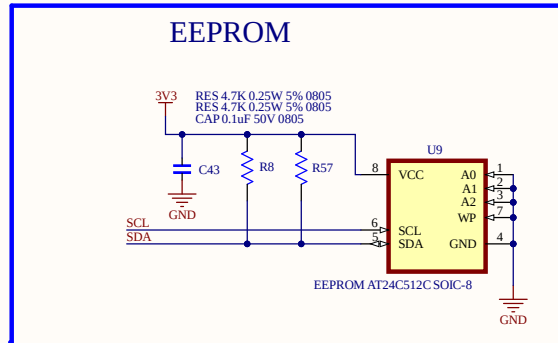
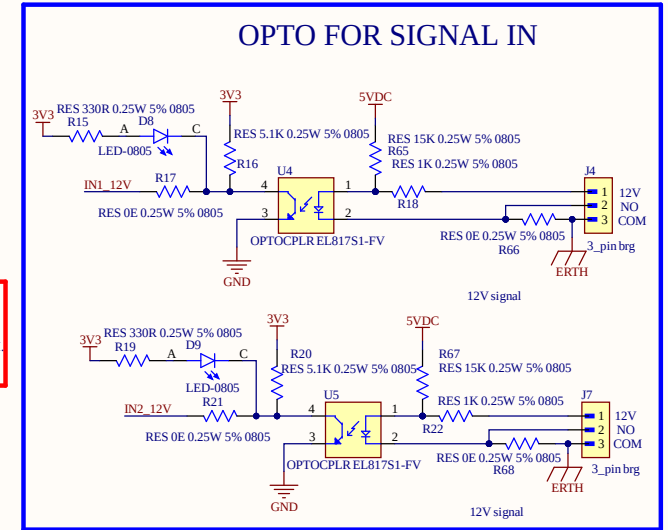
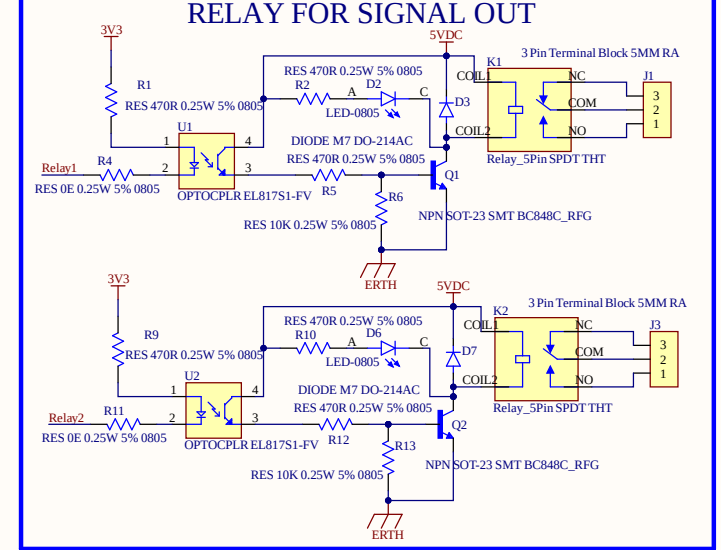
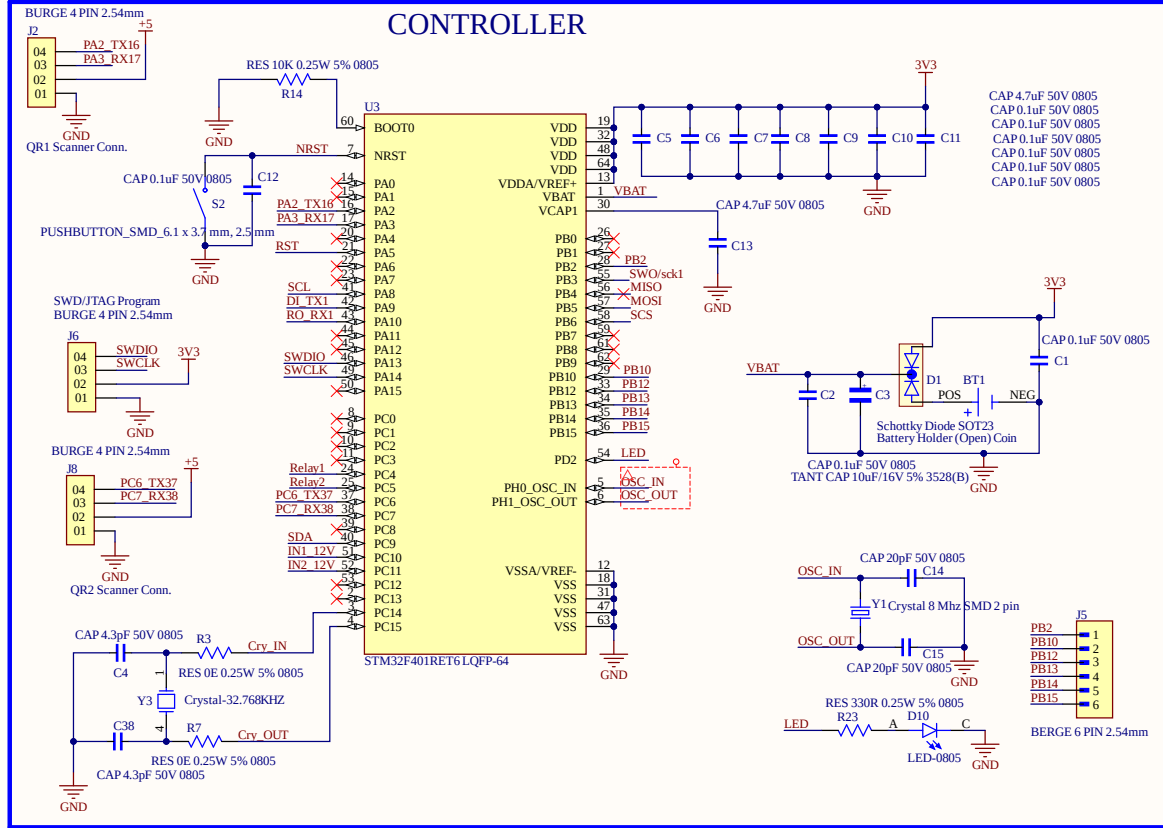
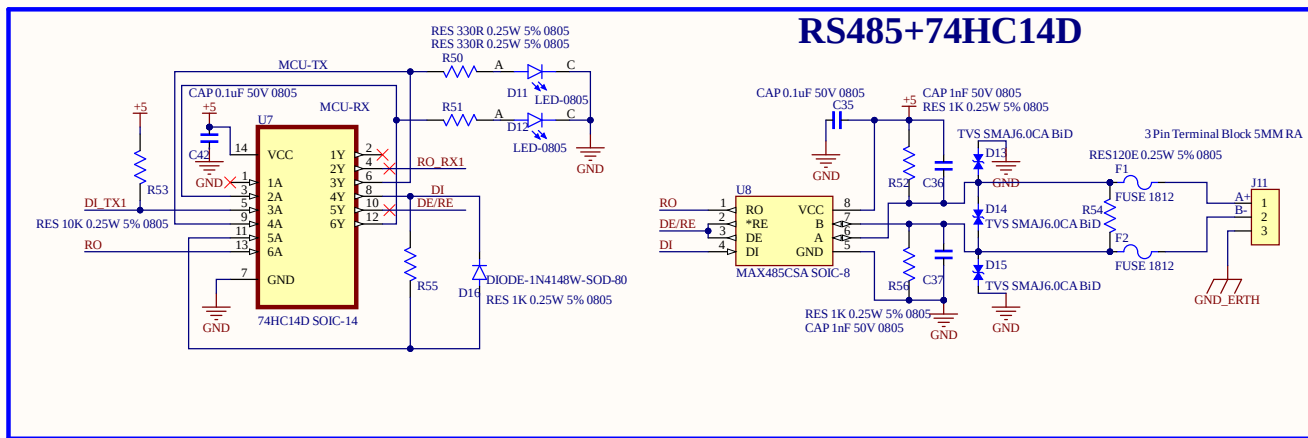



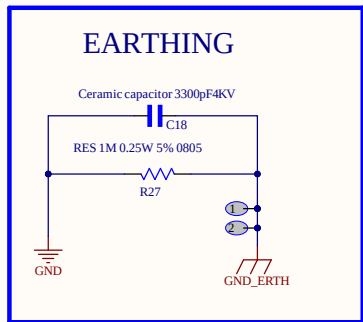

At J4 and J7 Remove R65 and R67; when incoming signal is 12V. And connect pin1(12V) and pin2(NO) of J4 and J7.


At J4 and J7 Remove R66 and R68; when incoming signal are NO/COMM. And connect pin3(COM) and pin2(NO) of J4 and J7.

Title		
Size	Number	Revision
A		
Date:	12/19/2025	Sheet of
File:	D:\VARUN\QR_Scanning_V1_STM32	Drawn By:

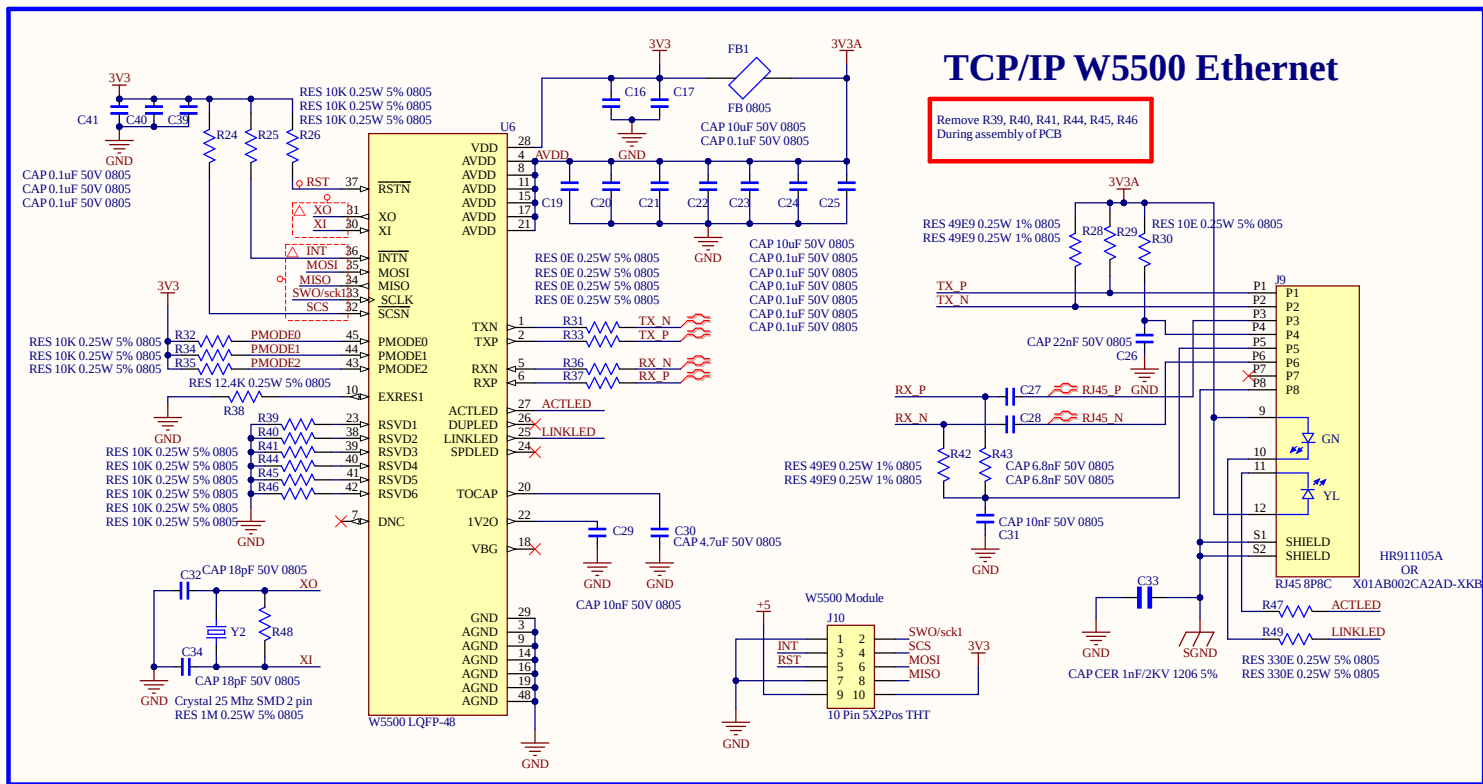

*1
HOUSTON
HOUSTON_LOGO

Title		
Size A	Number	Revision
Date: 12/19/2025	Sheet of 12	
File: D:\VARUN\QR_Scanning1_V1_STM32\	Drawn By:	

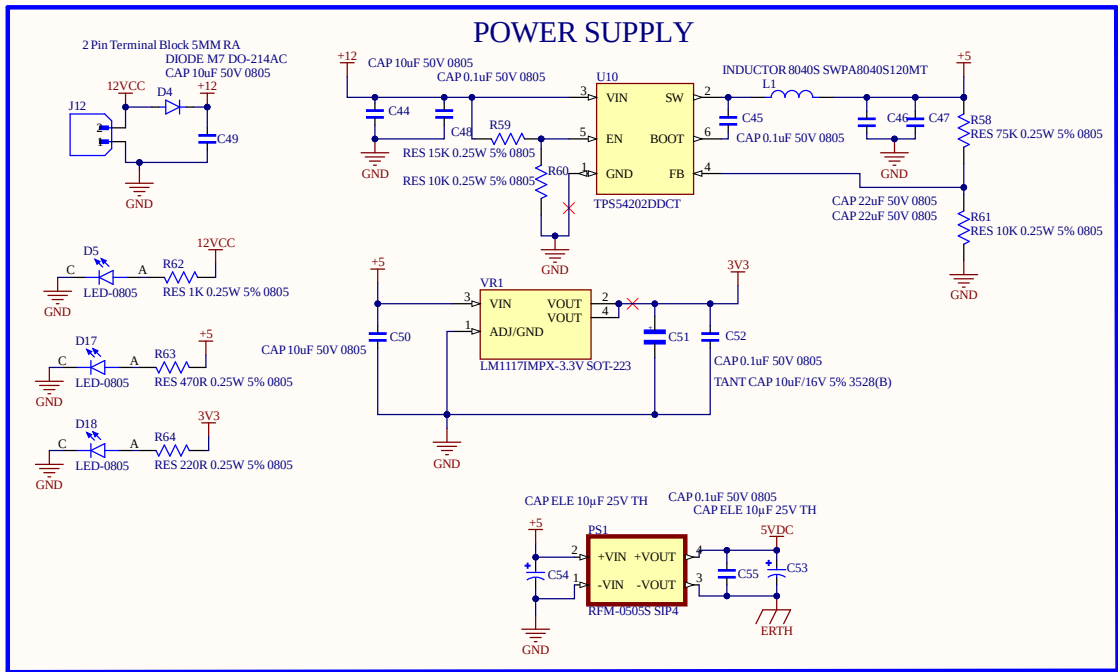

Title		
Size A	Number	Revision
Date: 12/19/2025	Sheet of 12	
File: D:\VARUN\QR_Scanning2_V1_STM32\QR_Scanning2_V1_STM32.sch	By: VARUN	

