SRAM thresholds change tiling, reuse and wait clocks

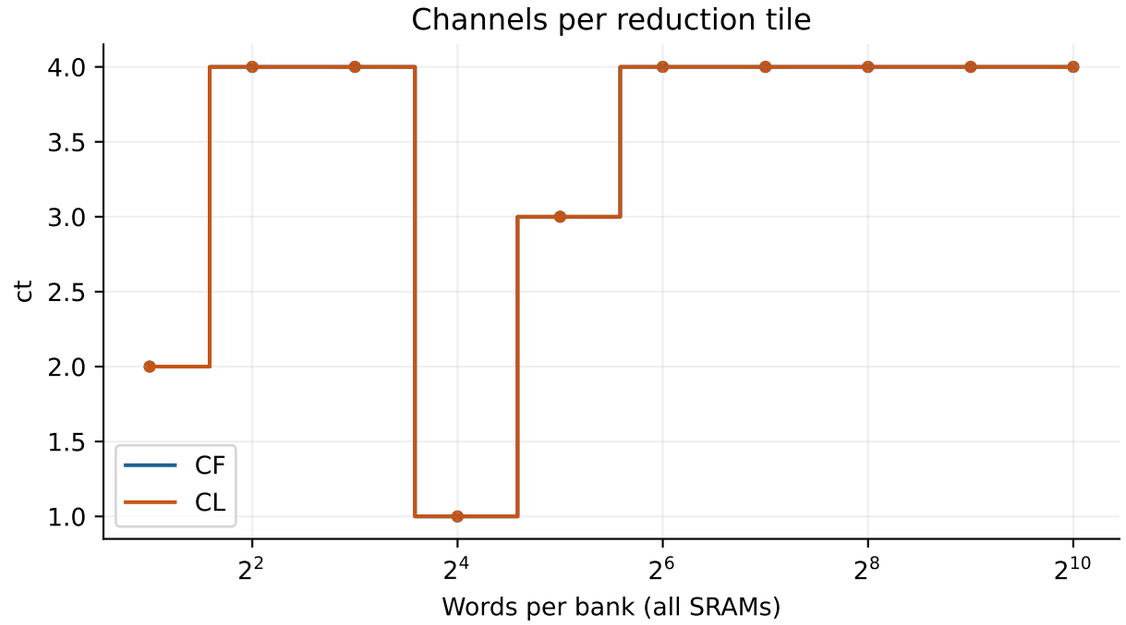

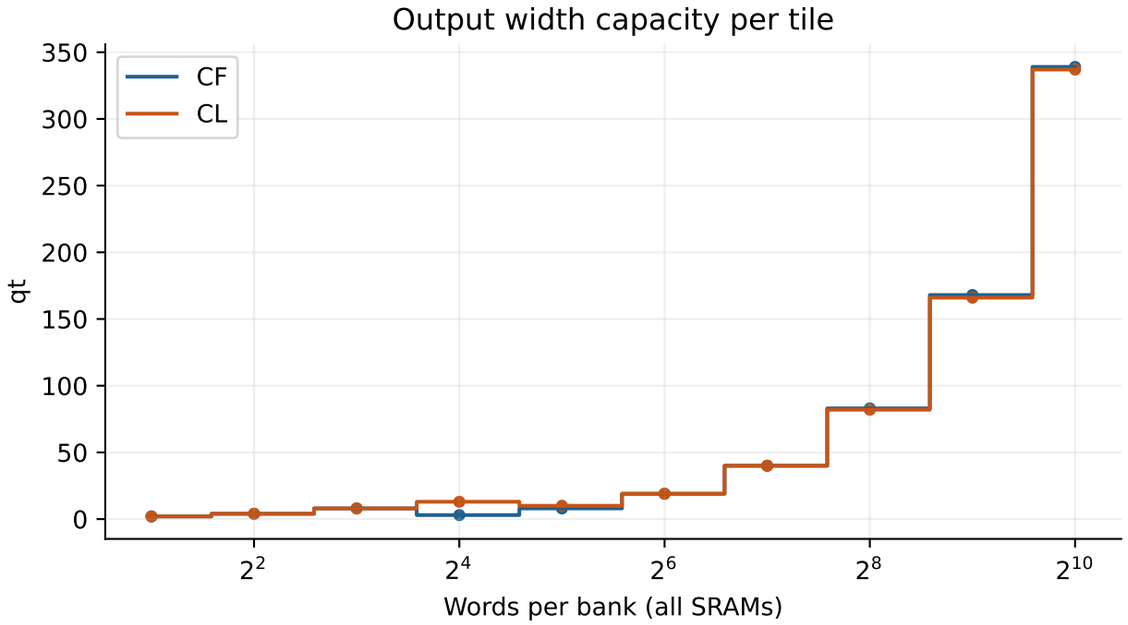

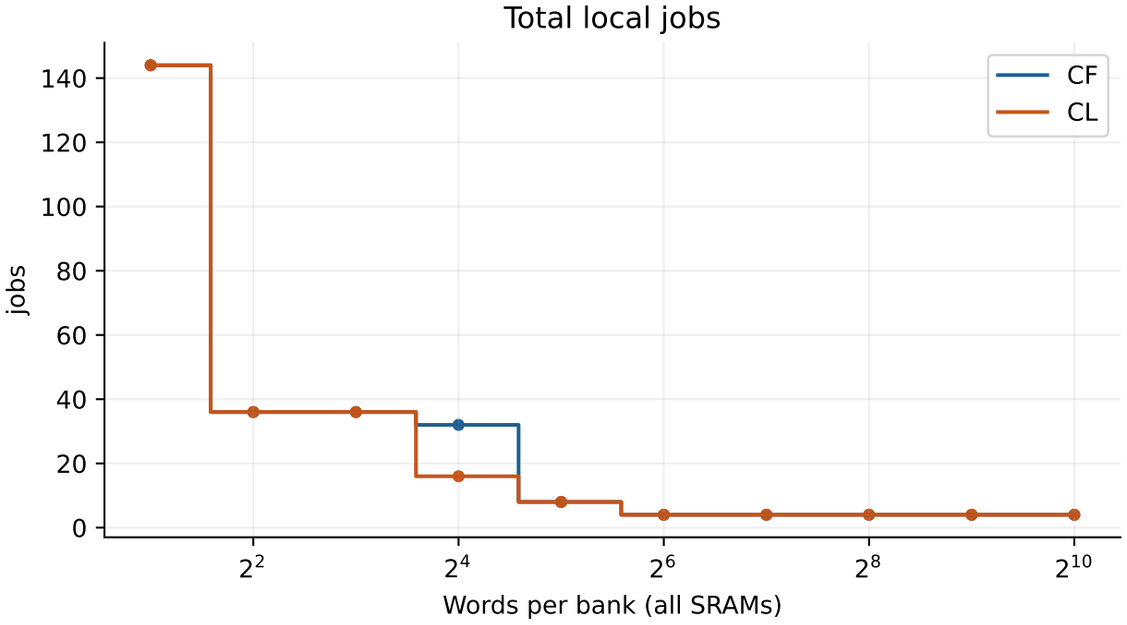

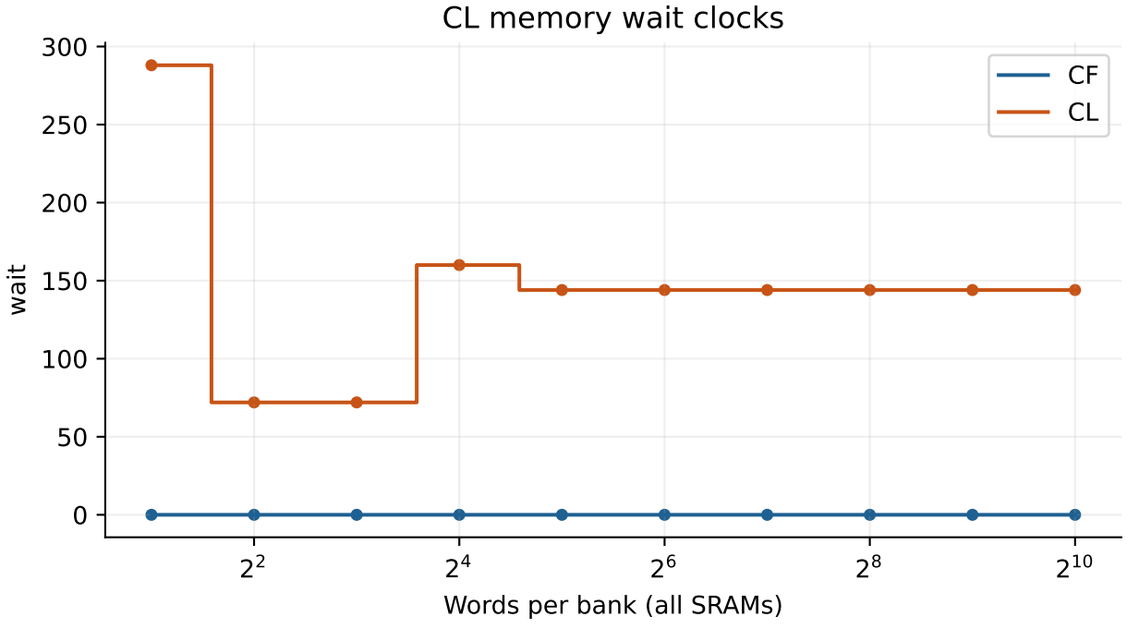

Baseline: A=4, N=1, C=4, K=2, H=W=6, R=S=3; input/output/kernel=256 words per bank.
Stride=1, dilation=1, padding=0. Each panel changes only its labeled dimension(s).
Qt is planner capacity; an actual job is clipped to remaining output width.