




Customer :
Reference :

Pump Performance Curve

Webtrol Selector System 25.5.0

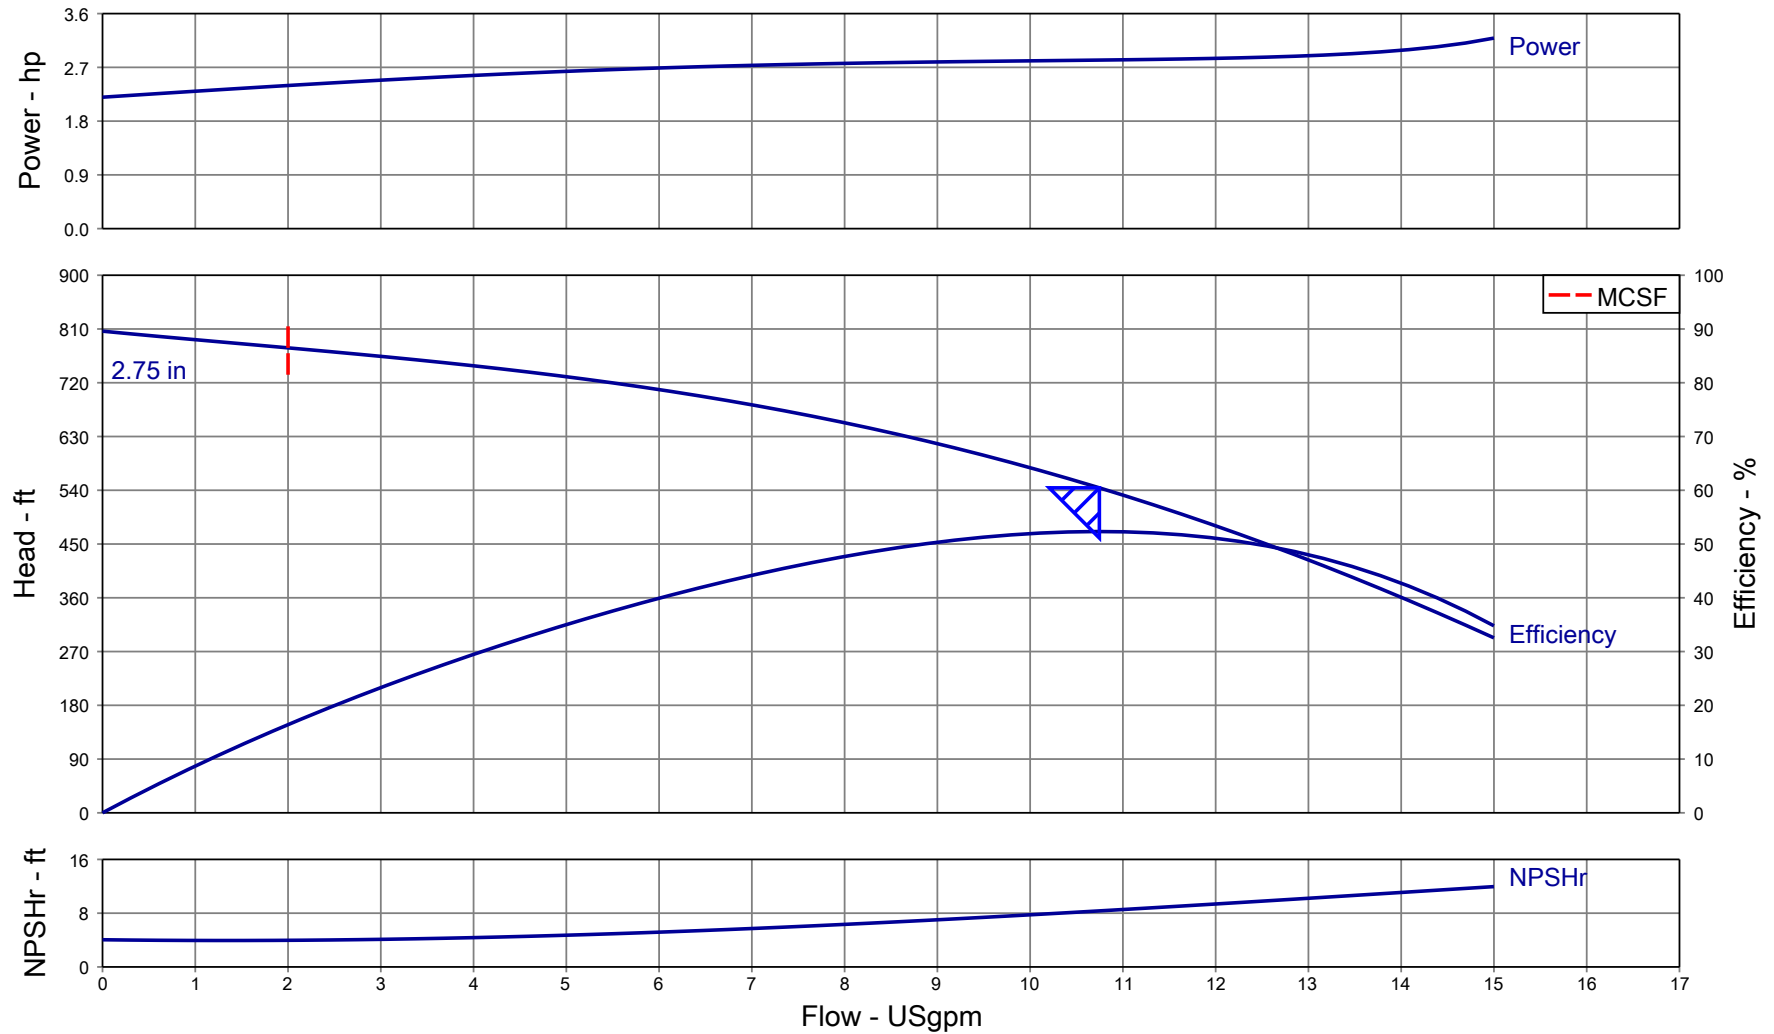


Item number	: Default	Size	: H10B26	Flow, rated	: 10.75 USgpm
Service	:	Stages	: 26	Head, rated	: 544.1 ft
Quantity	: 1	Speed	: 3450 rpm	NPSH required	: 8.34 ft
Quote number	:	Based on curve number	: H10	Fluid density	: 1.000 / 1.000 SG
Date last saved	: 04 Nov 2025 4:02 PM	Efficiency	: 52.32 %	Viscosity	: 1.00 cP
		Power, rated	: 2.82 hp	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00



Customer :
Reference :

Multi-Speed Performance Curve

Webtrol Selector System 25.5.0

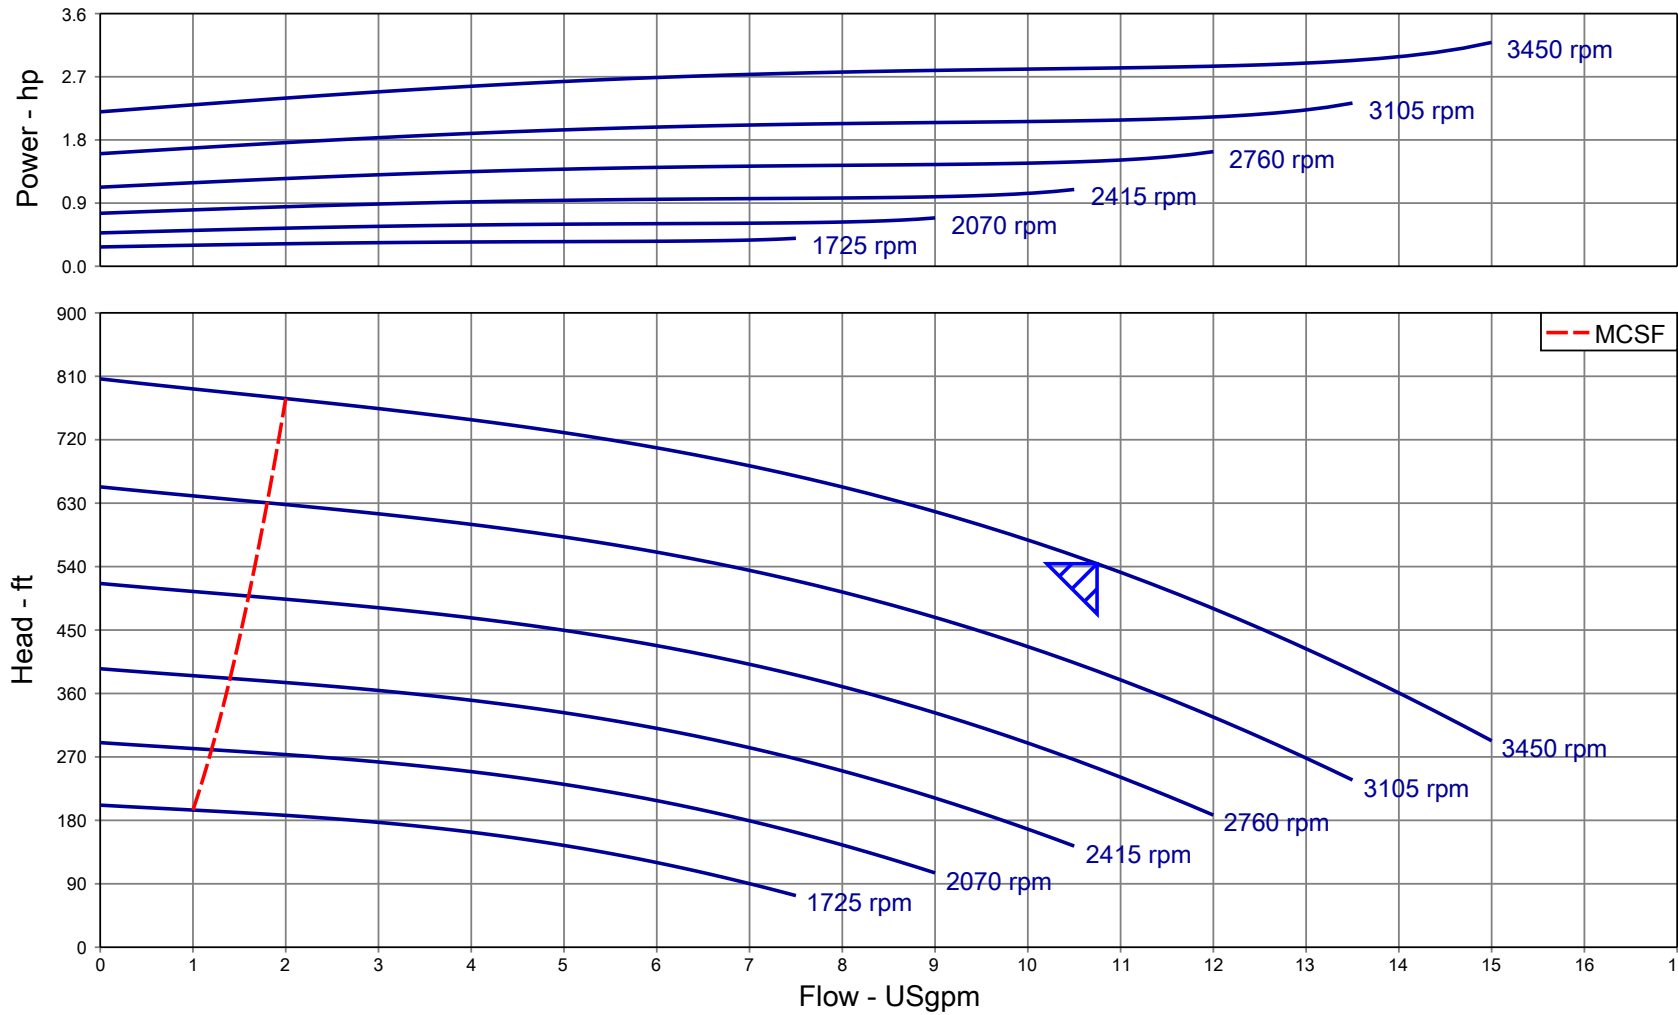

Item number	: Default	Size	: H10B26	Flow, rated	: 10.75 USgpm
Service	:	Stages	: 26	Head, rated	: 544.1 ft
Quantity	: 1	Efficiency	: 52.32 %	Speed	: 3450 rpm
Quote number	:	Power, rated	: 2.82 hp	Impeller dia.	: 2.75 in
Based on curve	: H10	NPSH required	: 8.34 ft	Fluid density	: 1.000 / 1.000 SG
number	:	Site Supply Frequency	: 60 Hz	Viscosity	: 1.00 cP
Date last saved	: 04 Nov 2025 4:02 PM	Nominal speed	: 3450 rpm	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00