


Wire Specifications:
16AWG 1.36 mm² Spec44
22AWG 0.32mm² Spec44

LV Battery

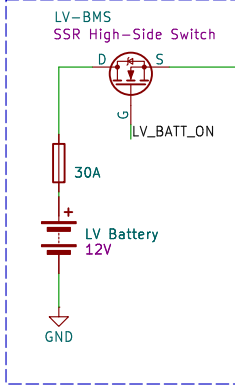


Fuse rated at 750mA to provide strict overcurrent protection for the interlocks while safely accommodating the 392mA nominal SDC current.


Emergency Buttons



BSPD

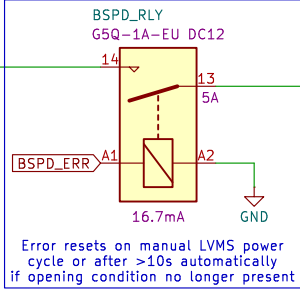


Emergency Button




Accumulator

TRACTIVE RELAY CONTROLLER PCB

- Controls precharge sequence and closing of AIRs
- Prevents re-closing of AIRs if SDC closes without power cycle
- Sends TS READY to and awaits TS ON signal from VCU
- Powers AIR Coils directly from SDC

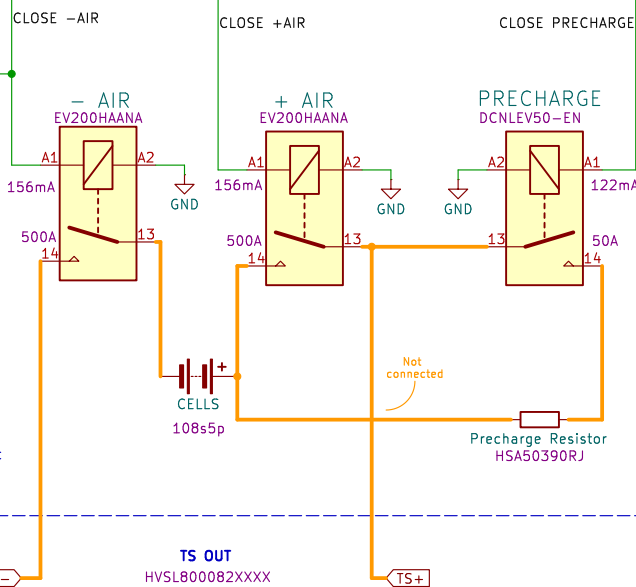

AIRS:
- 1.7W @ 12V DC
hold power
- 156mA coil current
Total 312mA

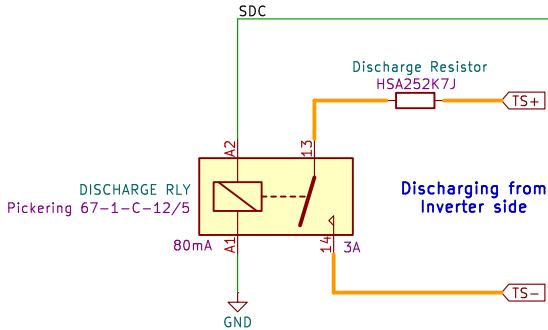

Total SDC Consumption = AIR Coil Current + Discharge Coil current
= 312mA + 80mA
= 392mA

All components in SDC rated to handle current

Orion BMS 2




Bender IR155-3203



AMS/IMD Latching PCB

(PCB integrated with TSAL Logic)

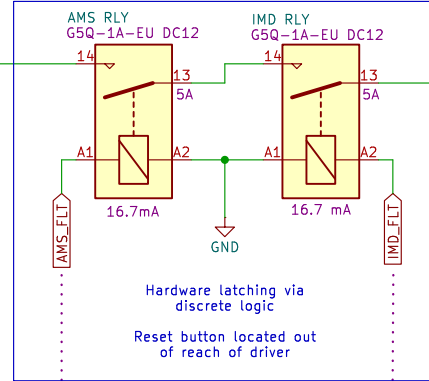

Vehicle: STAG 12
Drawn By: Adam Eastman
Checked By: John McGarvey, Ray Wang
CAD Part: N/A

SUFST

Sheet: Shutdown Loop
File: shutdown_loop.kicad_sch

Title: Shutdown Circuit


Size: A3 Date: 2026-03-23
KiCad E.D.A. 9.0.4

Rev: v1.0.0
Id: 5/11




Accumulator Hand Cart Electronics Box

Wire Specifications:
16AWG 1.36 mm² Spec44

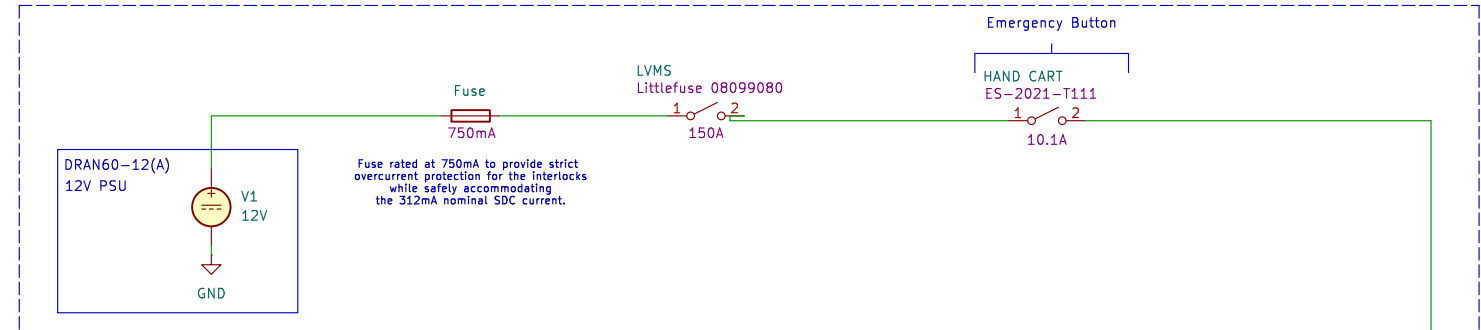


Accumulator

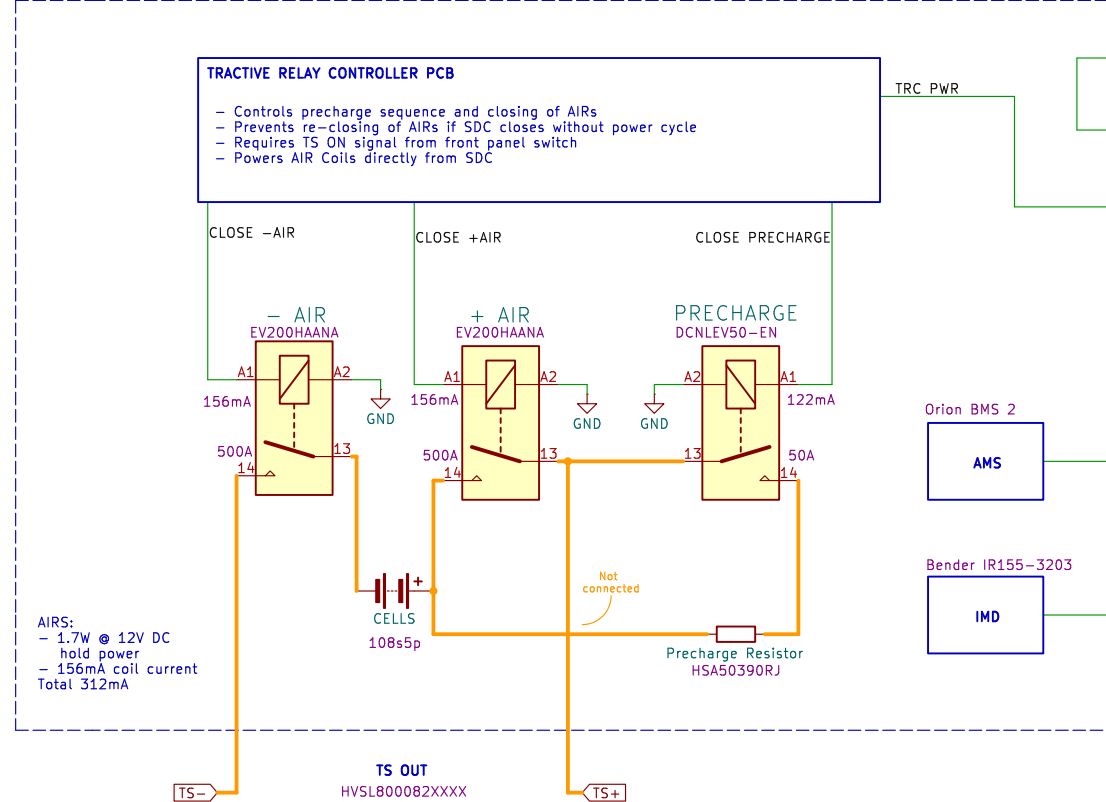

AMS/IMD Latching PCB

(PCB integrated with TSAL Logic)

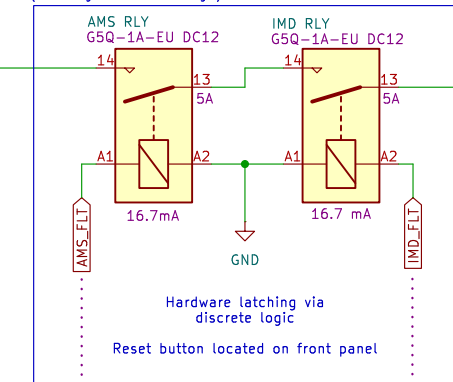

Orion BMS 2



Bender IR155-3203



Vehicle: STAG 12
Drawn By: Adam Eastman
Checked By: John McGarvey, Ray Wang
CAD Part: N/A
SUFST

Sheet: Charging Cart Shutdown
File: ChargingCartShutdown.kicad_sch

Title: Charging Shutdown Circuit

Size: A4 Date: 2026-03-23

KiCad E.D.A. 9.0.4

Rev: v1.0.0

Id: 3/11

