
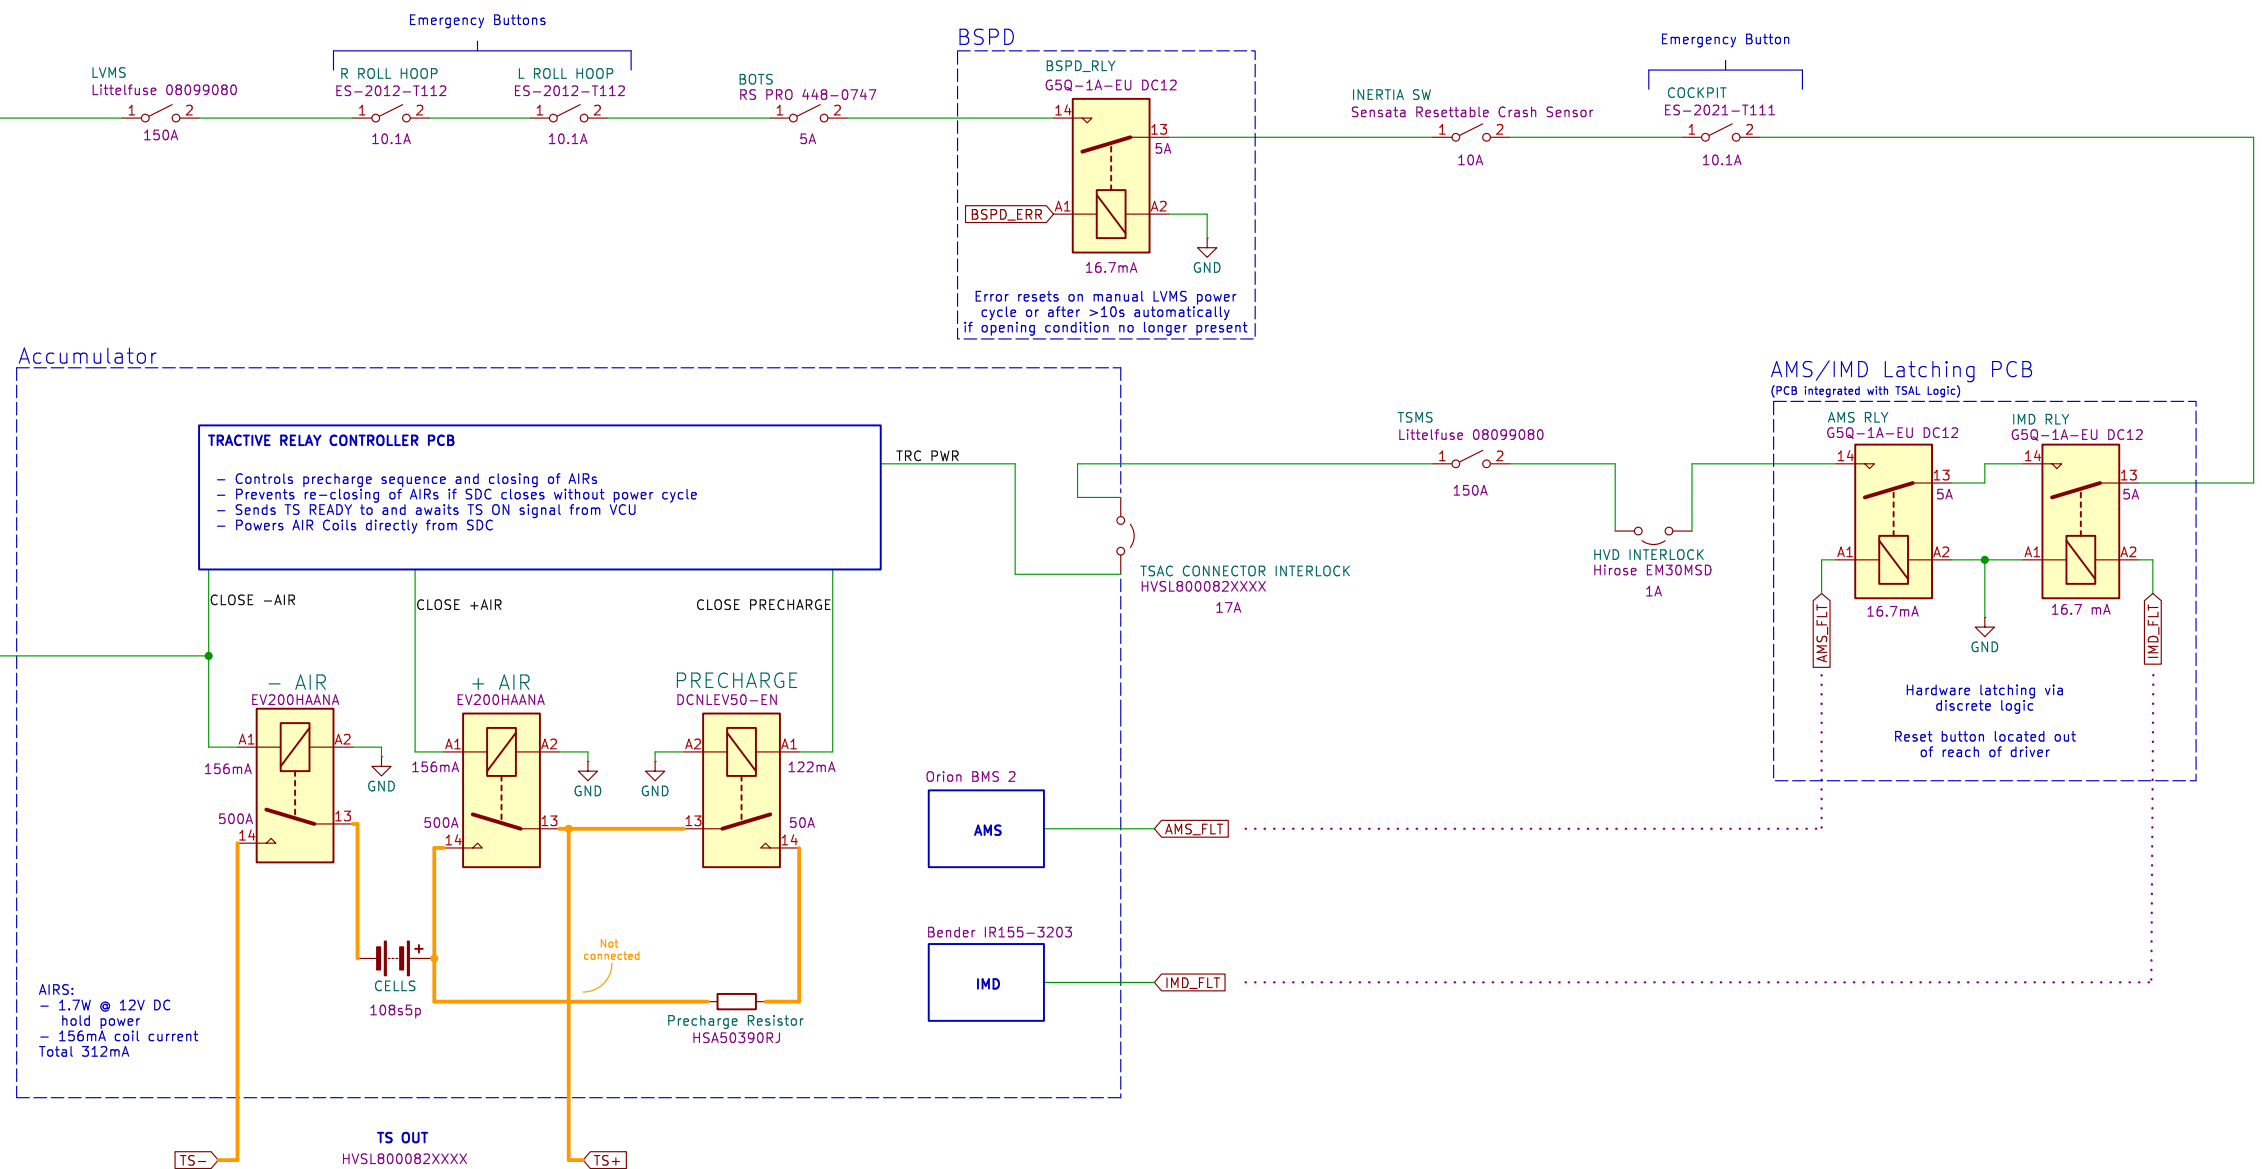


Wire Specifications:
16AWG 1.36 mm² Spec44
22AWG 0.32mm² Spec44

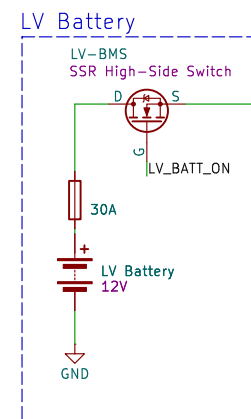


Wire Specifications:
16AWG 1.36 mm² Spec44

Emergency Button

LVMS
Littlefuse 08099080
150A

HAND CART
ES-2021-T111
10.1A

DRAN60-12(A)
12V PSU



Accumulator




TRACTIVE RELAY CONTROLLER PCB

- Controls precharge sequence and closing of AIRs
- Prevents re-closing of AIRs if SDC closes without power cycle
- Sends TS READY to and awaits TS ON signal from VCU
- Powers AIR Coils directly from SDC

CLOSE -AIR

CLOSE +AIR

CLOSE PRECHARGE



AIRS:
- 1.7W @ 12V DC
hold power
- 156mA coil current
Total 312mA

TS OUT
HVSL800082XXXX

CELLS
108s5p

Precharge Resistor
HSA50390RJ

Not connected

TRC PWR

TSAC CONNECTOR INTERLOCK
HVSL800082XXXX
17A

Orion BMS 2


AMS

Bender IR155-3203

IMD

AMS/IMD Latching PCB

(PCB integrated with TSAL Logic)

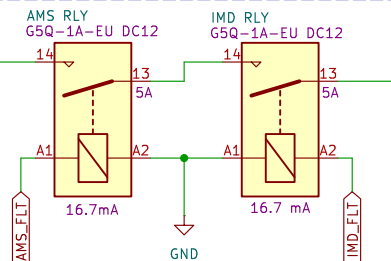

Hardware latching via
discrete logic
Reset button located on front panel

Vehicle: STAG12
Drawn By: Adam Eastman
Checked By: John McGarvey, Ray Wang
CAD Part: N/A
SUFST

Sheet: Charging Cart Shutdown
File: ChargingCartShutdown.kicad_sch

Title: Charging Shutdown Circuit

Size: A4 Date: 2026-03-23
KiCad E.D.A. 9.0.4

Rev: v1.0.0
Id: 3/7

