


Three Phase Hybrid Inverter

SUN-14/15/16/18/20K-SG05LP3-EU-SM2

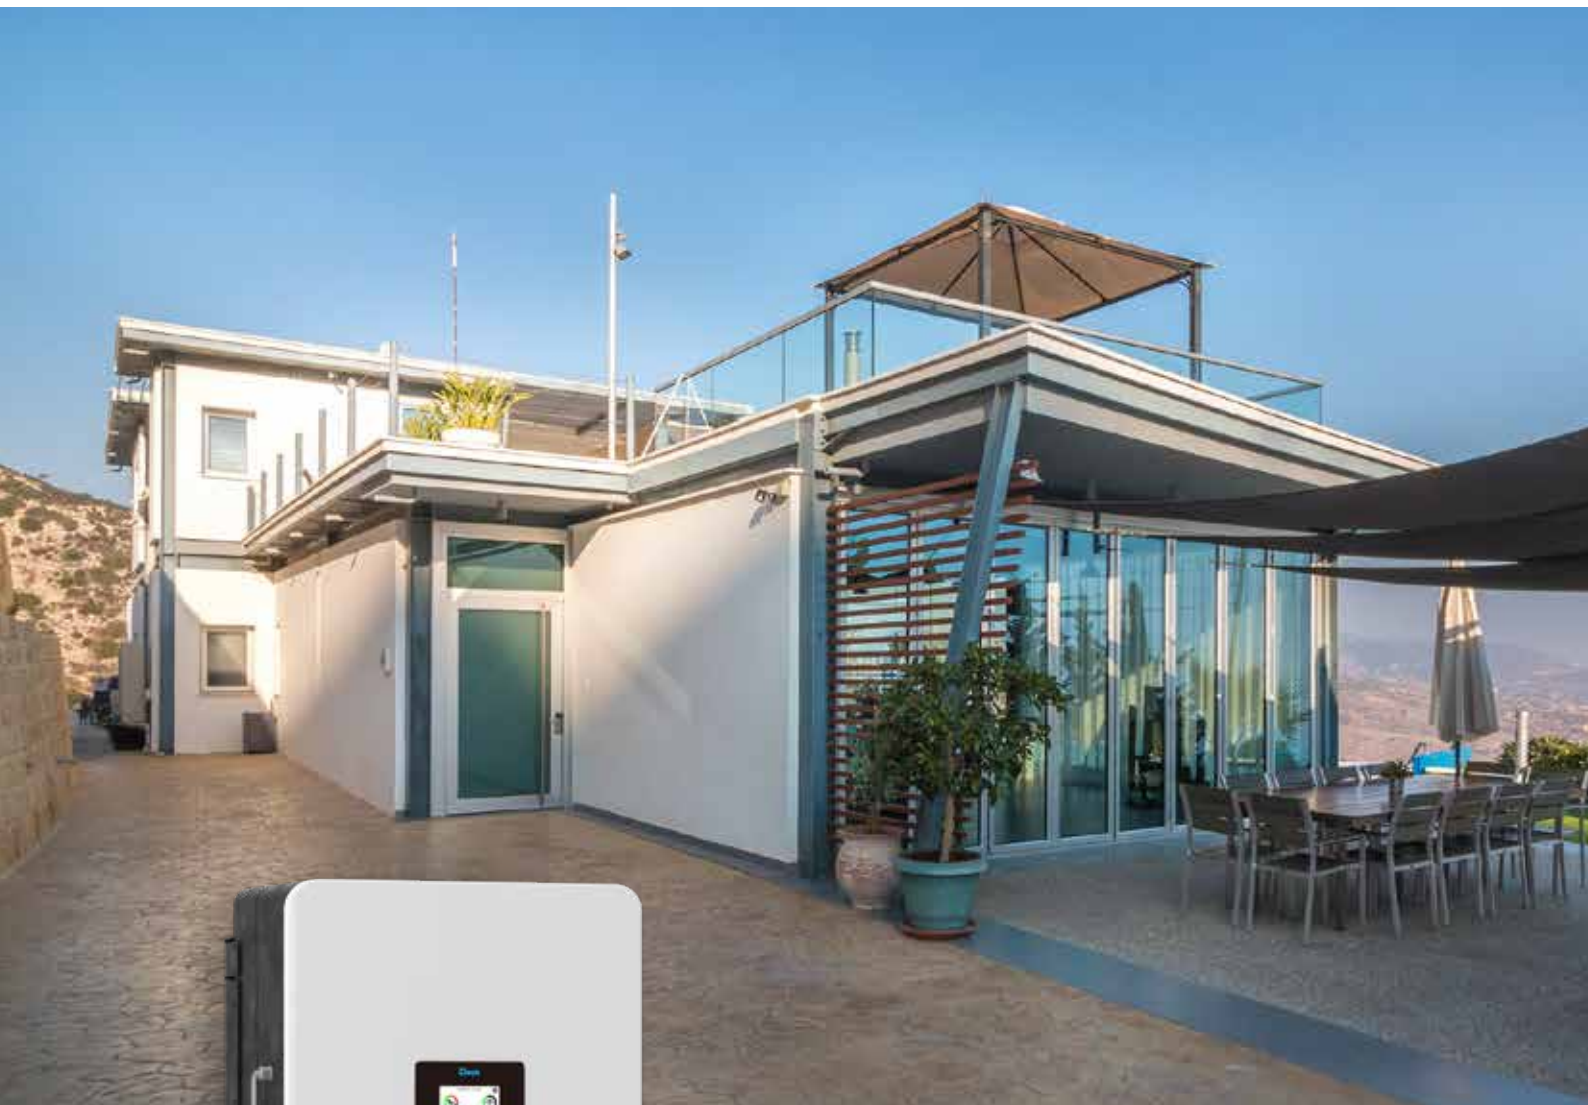

100

100% unbalanced output, each phase; Max. output up to 50% rated power



AC couple to retrofit existing solar system

10

Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel

350

Max. charging/discharging current of 350A

48

48V low voltage battery, transformer isolation design

6

6 time periods for battery charging/discharging



Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

Model	SUN-14K-SG05LP3 -EU-SM2	SUN-15K-SG05LP3 -EU-SM2	SUN-16K-SG05LP3 -EU-SM2	SUN-18K-SG05LP3 -EU-SM2	SUN-20K-SG05LP3 -EU-SM2
Battery Input Data					
Battery Type			Lead-acid or Lithium-ion		
Battery Voltage Range (V)			40-60		
Max. Charging Current (A)	260	280	300	330	350
Max. Discharging Current (A)	260	280	300	330	350
Charging Strategy for Li-ion Battery			Self-adaption to BMS		
Number of Battery Input			1		
PV String Input Data					
Max. PV Input Power (W)	21000	22500	24000	27000	30000
Max. PV Input Voltage (V)			800		
Start-up Voltage (V)			160		
MPPT Voltage Range (V)			160-650		
Rated PV Input Voltage (V)			550		
Max. Operating PV Input Current (A)			36+20		
Max. Input Short-Circuit Current (A)			54+30		
No. of MPP Trackers/ No. of Strings MPP Tracker			2/2+1		
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	14000	15000	16000	18000	20000
Max. AC Input/Output Apparent Power (VA)	15400	16500	17600	19800	22000
Rated AC Input/Output Current (A)	21.3/20.3	22.8/21.8	24.3/23.2	27.3/26.1	30.4/29
Max. AC Input/Output Current (A)	21.3/20.3	22.8/21.8	24.3/23.2	27.3/26.1	30.4/29
Max. Continuous AC Passthrough (grid to load) (A)			70		
Peak Power (off-grid) (W)			2 times of rated power, 10s		
Power Factor Adjustment Range			0.8 leading to 0.8 lagging		
Rated Input/Output Voltage/Range (V)			220/380V, 230/400V 0.85Un-1.1Un		
Rated Input/Output Grid Frequency/Range(Hz)			50/45-55, 60/55-65		
Grid Connection Form			3L+N+PE		
Total Current Harmonic Distortion THDi			<3% (of nominal power)		
DC Injection Current			<0.5% In		
Efficiency					
Max. Efficiency			97.6%		
Euro Efficiency			97.0%		
MPPT Efficiency			>99%		
Equipment Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection AC Output Overvoltage Protection, AC Output Short Circuit Protection, Thermal Protection DC Terminal Insulation Impedance Monitoring, DC Component Monitoring, Ground Fault Current Monitoring Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch Overvoltage Load Drop Protection		Residual Current (RCD) Detection, Surge protection level		
Surge Protection Level			TYPE II(DC), TYPE II(AC)		
Interface					
Communication Interface			RS485/RS232/CAN		
Monitor Mode			GPRS/WIFI/Bluetooth/4G/LAN (optional)		
General Data					
Operating Temperature Range (°C)			-40 to +60°C, >45°C Derating		
Permissible Ambient Humidity			0-100%		
Permissible Altitude			3000m		
Noise (dB)			<60		
Ingress Protection(IP) Rating			IP 65		
Inverter Topology			Non-Isolated		
Over Voltage Category			OVC II(DC), OVC III(AC)		
Cabinet Size (WxHxD mm)	456×750×268.5		(Excluding Connectors and Brackets)		
Weight (kg)			50.6		
Type of Cooling			Intelligent Air Cooling		
Warranty	the Warranty Period Depends the Final Installation Site of Inverter		5 Years/10 Years	More Info Please Refer to Warranty Policy	
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 997, RD 140, UNE 217002, OVE-Richtlinie R25, G99, VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1, IEC/EN 61000-6-2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				