


Three Phase Hybrid Inverter

SUN-29.9/30/35K-SG01HP3-EU-BM3

SUN-40/50K-SG01HP3-EU-BM4

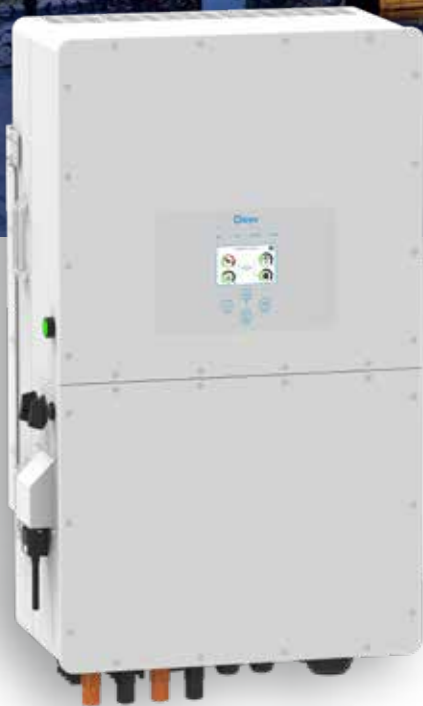

- 100** 100% unbalanced output, each phase; Max. output up to 50% rated power
-  DC couple and AC couple to retrofit existing solar system
- 10** *Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- 100** Max. charging/discharging current of 100A
- H** High voltage battery, higher efficiency
- 6** 6 time periods for battery charging/discharging
-  Support storing energy from diesel generator

Deye

Stock Code: 605117.SH

Model	SUN-29.9K-SG01HP3 -EU-BM3	SUN-30K-SG01HP3 -EU-BM3	SUN-35K-SG01HP3 -EU-BM3	SUN-40K-SG01HP3 -EU-BM4	SUN-50K-SG01HP3 -EU-BM4
Battery Input Data					
Battery Type			Lithium-ion		
Battery Voltage Range (V)			160-800		
Max. Charging Current (A)			50+50		
Max. Discharging Current (A)			50+50		
Number of Battery Input			2		
Charging Strategy for Li-Ion Battery			Self-adaption to BMS		
PV String Input Data					
Max. DC Input Power (W)	38870	39000	45500	52000	65000
Max. DC Input Voltage (V)			1000		
Start-up Voltage (V)			180		
MPPT Range (V)			150-850		
Full Load DC Voltage Range (V)	360-850	360-850	360-850	360-850	450-850
Rated DC Input Voltage (V)			600		
PV Input Current (A)	36+36+36	36+36+36	36+36+36	36+36+36+36	
Max. PV I _{SC} (A)	55+55+55	55+55+55	55+55+55	55+55+55+55	
No.of MPP Trackers		3		4	
No.of Strings per MPP Tracker		2+2+2		2+2+2+2	
AC Output Data					
Rated AC Output Active Power (W)	29900	30000	35000	40000	50000
Max AC Output Active Power (W)	29900	33000	38500	44000	55000
AC Output Rated Current (A)	45.4/43.4	45.5/43.5	53.1/50.8	60.7/58	75.8/72.5
Max. AC Output Rated Current (A)	45.4/43.4	50/47.8	58.4/55.8	66.7/63.8	83.4/79.7
Max. Three-phase Unbalanced Output Current (A)	60	60	60	70	83.3
Max. Continuous AC Passthrough (A)			200		
Peak Power (Off Grid)			1.5 time of rated power, 10 S		
Generator Input/Smart Load /AC Couple Current (A)	45.4 / 200 / 45.4	45.5 / 200 / 45.5	53.1 / 200 / 53.1	60.7 / 200 / 60.7	75.8 / 200 / 75.8
Power Factor Adjustment Range			0.8 leading to 0.8 lagging		
Output Frequency and Voltage		50/60Hz	3L/N/PE 220/380, 230/400Vac		
Grid Type			Three Phase		
Total Harmonic Distortion (THD)			≤3% (of nominal power)		
DC Current Injection			<0.5% I _n		
Efficiency					
Max. Efficiency			97.60%		
Euro Efficiency			97.00%		
MPPT Efficiency			99.90%		
Protection					
Integrated		Anti-islanding Protection, PV String Input Reverse Polarity Protection, Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, Output Shorted Protection, Surge Protection			
Over Voltage Category			DC Type II/AC Type III		
Certifications and Standards					
Grid Regulation		VDE4105, IEC61727/62116, VDE0126, AS4777.2, CEI 0 21, EN50549-1, G98, G99, C10-11, UNE217002, NBR16149/NBR16150			
Safety EMC / Standard		IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
General Data					
Operating Temperature Range (°C)			-40~60°C, >45°C Derating		
Cooling			Smart Cooling		
Noise (dB)			≤65 dB		
Communication with BMS			RS485; CAN		
Weight (kg)			80		
Cabinet Size (WxHxD mm)		527×894×294 (Excluding Connectors and Brackets)			
Protection Degree			IP65		
Installation Style			Wall-mounted		
Warranty			5 Years (10 Years Optional)		

*Note: The function of Multiple units work in parallel mode will be available in Q1 2023