


PowerCube-M5A-64 System Voltage < 1500V



High Voltage Lithium-Ion Phosphate Battery storage system - PowerCube-M5A-64/zzzV-L15

Battery Module: HM5A180F

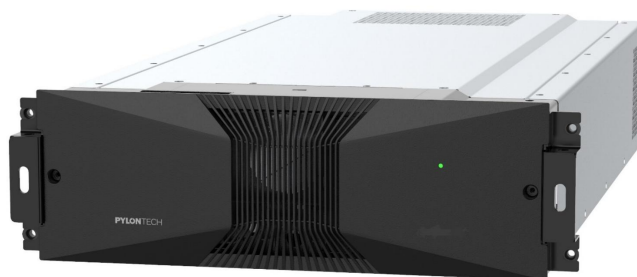

Module	HM5A180F
--------	----------

Basic Parameters	
Capacity(kWh)	15.68
Nominal Voltage(Vdc)	64
Nominal Capacity(AH)	245
Voltage Range(Vdc)	58~71
Depth of Discharge	90%
Dimension(W*D*H,mm)	460×900×160.5
Communication	RS485(MODBUS RTU)\CAN\LAN
Protection Class	IP20
Weight(kg)	115
Operation Temperature	0~50℃
Storage Temperature	-20~50℃
Product Certificate	UN38.3



Main Controller : S1500M5A180E

Module

S1500M5A180L

Basic Parameters	
Related Product	PowerCube-M5A180
AC Supply for BMS/FAN	100~305VAC/50/60Hz
System Operation Voltage (Vdc)	0~1500
Operation Current (Max.) (A)	180
Self-consumption Power(W)	16.5
Dimension (W*D*H, mm)	480×858×160
Communication	RS485(MODBUS RTU)/CAN/LAN
Protection Class	IP20
Weight(kg)	28
Operation Life	15+
Operation Temperature	-20~65
Storage Temperature	-40~80

Module
PowerCube-M5A-64/zzzV-L15
Basic Parameters

Battery System Capacity (kWh) 15.68× n

Battery System Voltage (Vdc) 64× n

Battery System Capacity (AH) 245

Battery Module HM5A180F

Controller Type S1500M5A180L

(External Power Supply Version, NA version) Isolating switch

Battery Capacity(kWh) 15.68

Battery Modules Qty. (Optional) 1~21

Battery System Charge Upper-Voltage(V) 71 × n

Battery System Nominal Current(A) 122.5

Battery System Continuous Current (A) 180

Peak Current (Amps) <210A for 5 minutes <500A for 30 seconds

Operation temp. range 10 ~ 40°C

Battery System Discharge lower-Voltage(V) 58×n

Round-trip efficiency (@1C-rate) 96%

Depth of Discharge 95%

Dimension(W*D*H, mm) 1050(W)*925(D)*1965(H) (22 slots)

Communication CANBUS/Modbus RTU/Modbus TCP/IP

Weight (kg) 210+ 115×n (where n = 1~22)

Operation Life 15+Years

Operation Temperature 10~40°C


Storage Temperature -20~50°C

Humidity 5 – 95 (without condensing)

Altitude (m) <4000

High Voltage Lithium-Ion Phosphate Battery storage system - PowerCube-M5A-64/zzzV-E15

Battery Module: HM5A180F

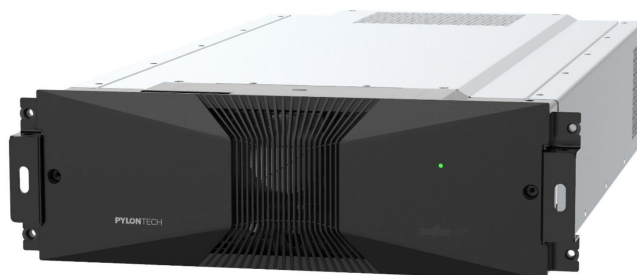

Module

HM5A180F

Basic Parameters	
Capacity(kWh)	15.68
Nominal Voltage(Vdc)	64
Nominal Capacity(AH)	245
Voltage Range(Vdc)	58~71
Depth of Discharge	90%
Dimension(W*D*H,mm)	460×900×160.5
Communication	RS485(MODBUS RTU)\CAN\LAN
Protection Class	IP20
Weight(kg)	115
Operation Temperature	0~50°C
Storage Temperature	-20~50°C
Product Certificate	UN38.3



Main Controller : S1500M5A180E

Module

S1500M5A180E

Basic Parameters	
Related Product	PowerCube-M5A180
AC Supply for BMS/FAN	100~305VAC/50/60Hz
System Operation Voltage (Vdc)	0~1500
Operation Current (Max.) (A)	180
Self-consumption Power(W)	16.5
Dimension (W*D*H, mm)	460×858×160
Communication	RS485(MODBUS RTU)\CAN\LAN
Protection Class	IP20
Weight(kg)	32
Operation Life	15+
Operation Temperature	-20~65
Storage Temperature	-40~80

Module
PowerCube-M5A-64/zzzV-E15
Basic Parameters

Battery System Capacity (kWh)	15.68× n
Battery System Voltage (Vdc)	64× n
Battery System Capacity (AH)	245
Battery Module	HM5A180F
Controller Type	S1500M5A180E (External Power Supply Version, EU version) Circuit breaker
Battery Capacity(kWh)	15.68
Battery Modules Qty. (Optional)	1~21
Battery System Charge Upper-Voltage(V)	71 × n
Battery System Nominal Current(A)	122.5
Battery System Continuous Current (A)	180
Peak Current (Amps)	<210A for 5 minutes <500A for 30 seconds
Operation temp. range	10 ~ 40°C
Battery System Discharge lower-Voltage(V)	58×n
Round-trip efficiency (@1C-rate)	96%
Depth of Discharge	95%
Dimension(W*D*H, mm)	1050(W)*925(D)*1965(H) (22 slots)
Communication	CANBUS/Modbus RTU/Modbus TCP/IP
Weight (kg)	210+ 115×n (where n = 1~22)
Operation Life	15+Years
Operation Temperature	10~40°C
Storage Temperature	-20~50°C
Humidity	5 – 95 (without condensing)
Altitude (m)	<4000