
Network Configurations description

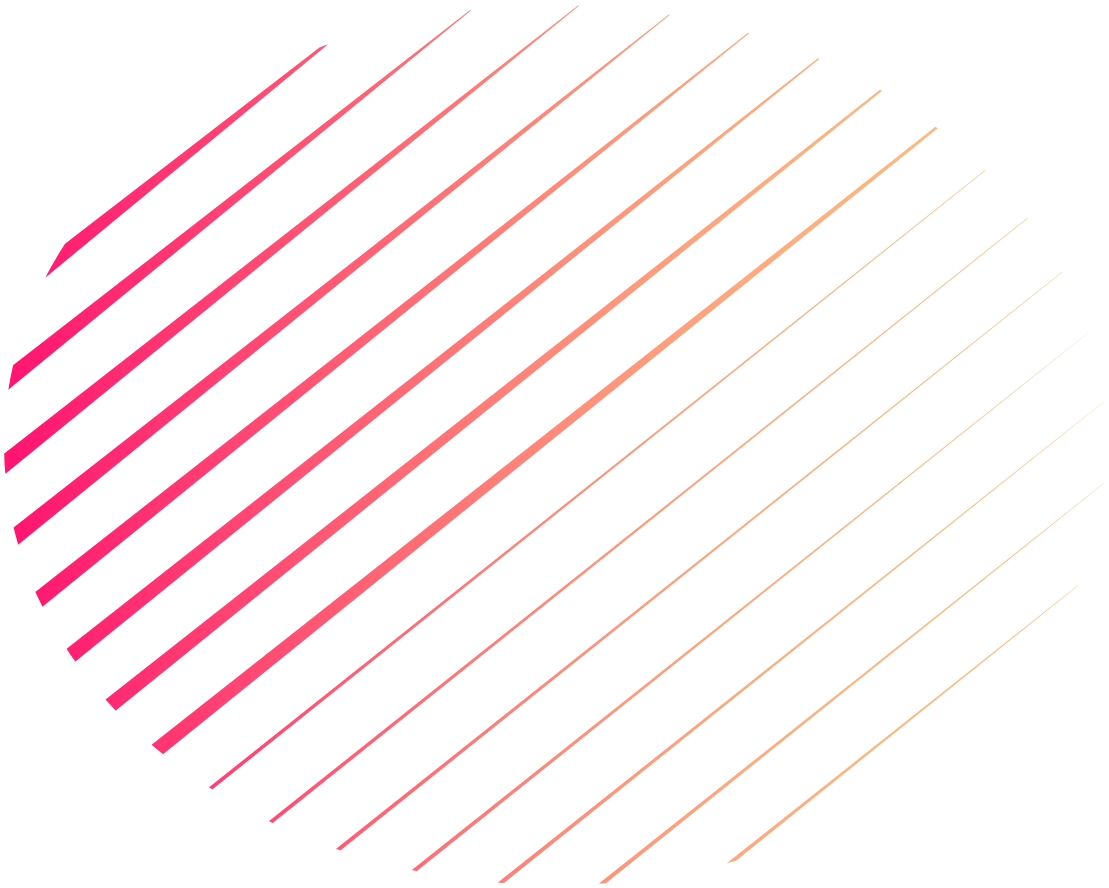

Year: 2024/2025
Module: Software & Operation Systems

Author: Rim Zino
Professor: Yassine Larbaoui

Ethernet Port Types

Device Name	Interfaces Used	Connected Devices
Switch1	Fa0/1 – Fa0/5, Gi0/1	PCs, Router, Switch2
Switch2	Fa0/1 – Fa0/6	Backup Servers, Configuration Servers, Switch1, Switch3
Switch3	Fa0/1 – Fa0/5	Unstructured & Structured Data Servers, Switch2
819HGW Router	GigabitEthernet0, fa0	Switch1, ASA Firewall, Cloud
ASA Firewall	E0/0, E0/1	Router, Cloud
PC0, PC1, Laptops	Fa0	Switch1
Cloud	Eth6	ASA Firewall

The following table illustrates the physical connectivity between each device using Ethernet ports. It outlines the connectivity between switches, router, firewall, and cloud to explain the network's design.

Cable Types

This table explains which network cables connect each device. It shows the right cable types—like straight-through and crossover—used to link PCs, switches, routers, and servers for smooth communication.

Connection Between	Cable Type

PC to Switch	Straight-through
Switch to Router	Straight-through
Router to ASA	Straight-through
ASA to Cloud	Copper Straight-through
Switch to Server	Straight-through
Switch to Switch	Crossover

IP Configurations

The table illustrates how laptops, PCs, servers, and routers are assigned their own IP addresses and gateways. This allows all devices to communicate with one another effortlessly within the same structured network.

Device Name	Interface	IP Address	Subnet Mask	Gateway
Laptop0	Fa0	192.168.1.2	255.255.255.0	192.168.1.1
Laptop1	Fa0	192.168.1.3	255.255.255.0	192.168.1.1
pc0	Fa0	192.168.1.4	255.255.255.0	192.168.1.1
pc1	Fa0	192.168.1.5	255.255.255.0	192.168.1.1
Configuration Servers	Fa0	192.168.1.6 192.168.1.7	255.255.255.0	192.168.1.1

Backup Servers	Fa0	192.168.1.8 192.168.1.9	255.255.255.0	192.168.1.1
Structured Servers	Fa0	192.168.1.10 192.168.1.11	255.255.255.0	192.168.1.1
Unstructured Servers	Fa0	192.168.1.12 192.168.1.13	255.255.255.0	192.168.1.1
819 HGW Router	GigabitEthernet0	192.168.1.1	255.255.255.0	–