**Exp No: 1 FLASHING OF LED USING AT89C51 MICROCONTROLLER USING PROTEUS**

**PROGRAM:**

```
 ORG 0000H
 UP: SETB P2.0
 ACALL DELAY
 CLR P2.0
 ACALL DELAY
 SJMP UP
DELAY: MOV R4,#35
 H1:MOV R3,#255
 H2:DJNZ R3,H2
 DJNZ R4,H1
 RET
 END
```

**SIMULATION:**

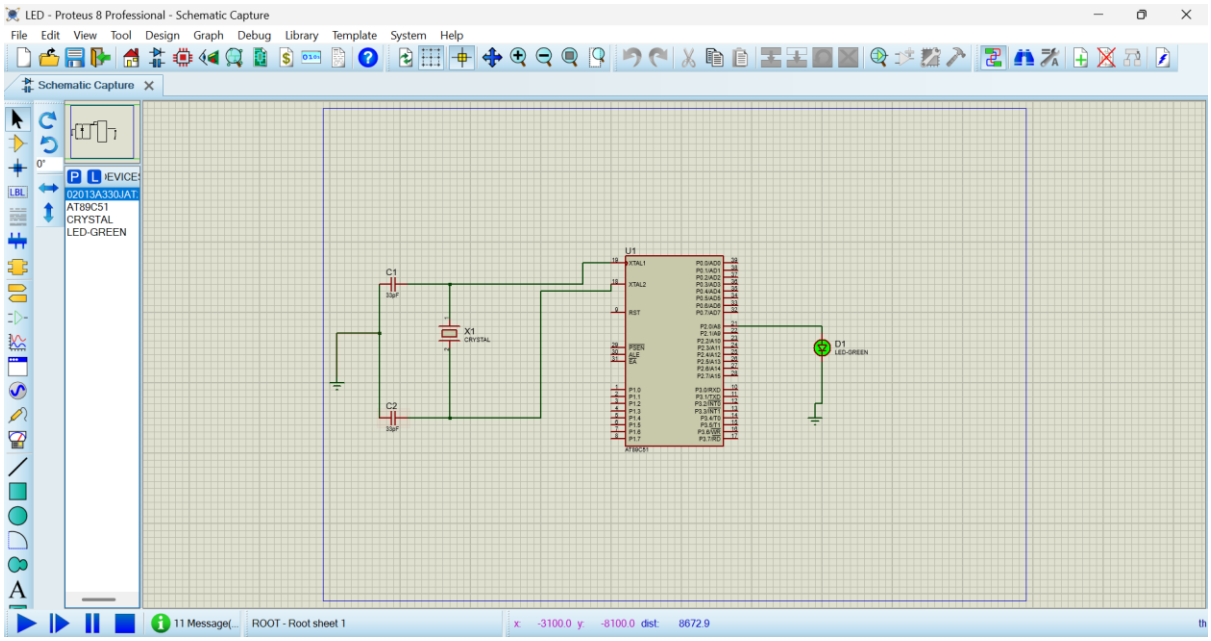

# OUTPUT:

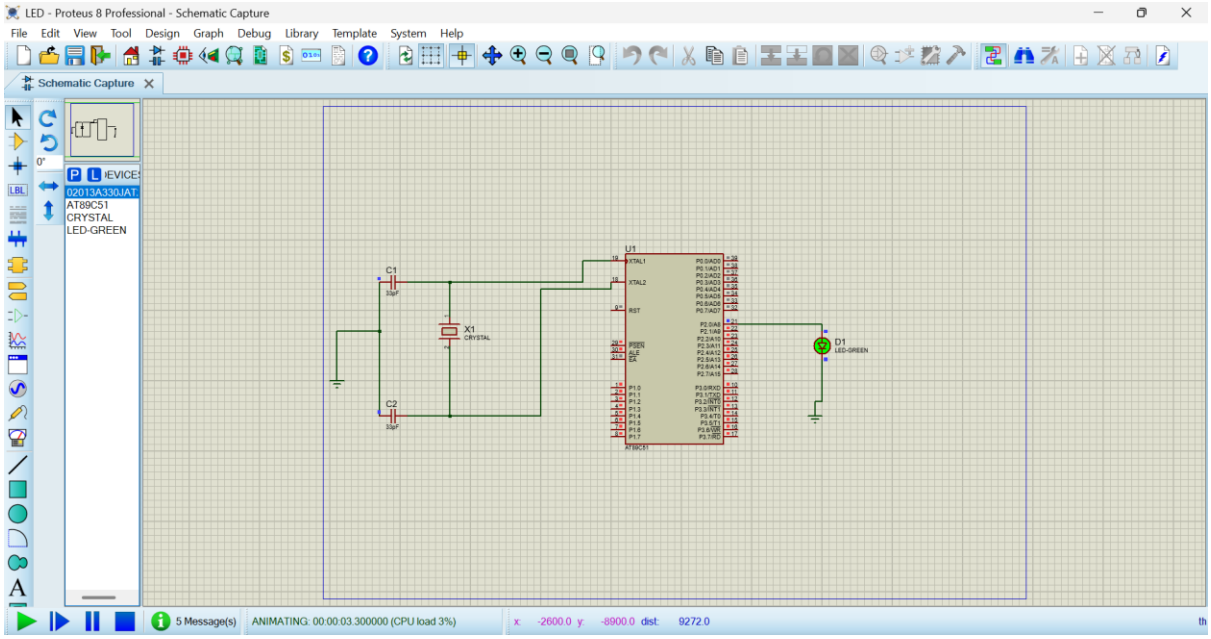
LED - Proteus 8 Professional - Schematic Capture
File Edit View Tool Design Graph Debug Library Template System Help
Schematic Capture
DEVICES
AT89C51
CRYSTAL
LED-GREEN
U1
C1
C2
X1
D1
5 Message(s)
ANIMATING: 00:00:03.300000 (CPU load 3%)