

EXPERIMENT – 08

STUDY OF GPIO & BIT ADDRESSING IN AT89C51

CODE:


```
#include <reg51.h>

sbit LED1 = P1^0;
sbit LED2 = P1^1;

void delay()
{
    unsigned int i, j;
    for(i = 0; i < 200; i++)
        for(j = 0; j < 1000; j++);
}

void main()
{
    while(1)
    {
        LED1 = 1;
        LED2 = 0;
        delay();
        LED1 = 0;
        LED2 = 1;
        delay();
    }
}
```

SIMULATION:

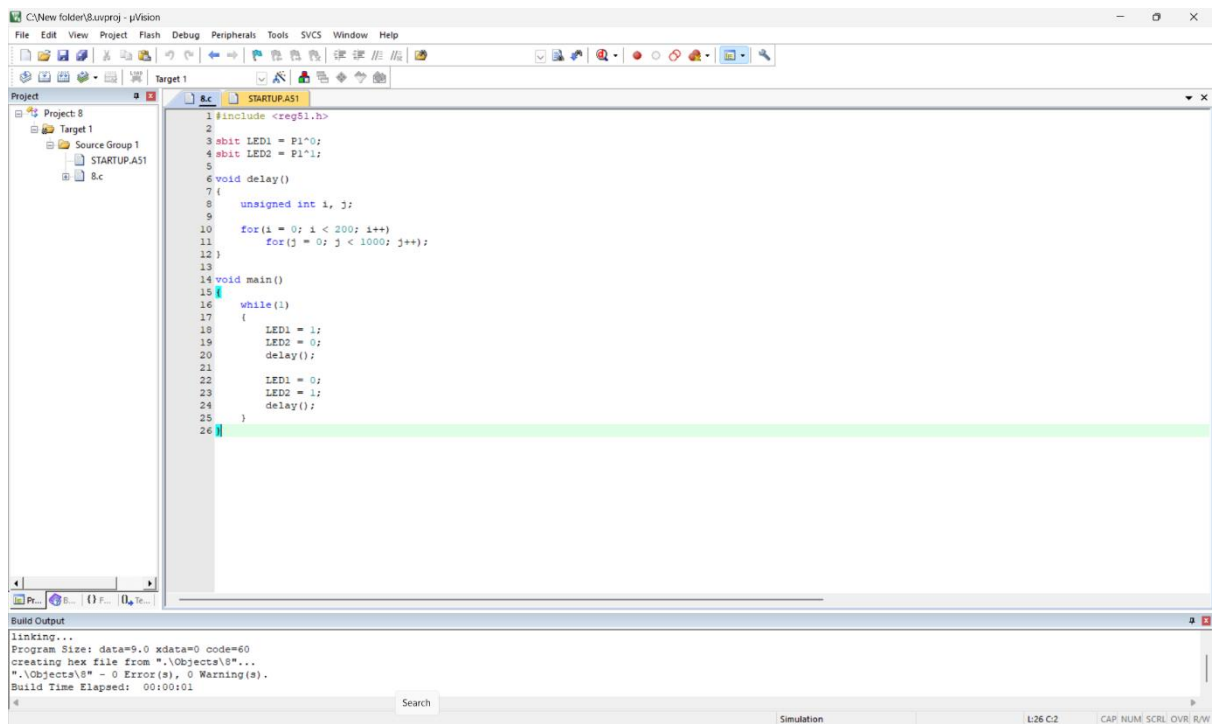

OUTPUT:

