


Stakeholder question catalogue

Emergency coordinators

Eighty operational questions for evidence-aware coordination across preparedness, activation, live incidents, handover, recovery and learning. The catalogue supports authorised human decisions; it does not issue commands or replace current incident command, emergency services or competent owners.

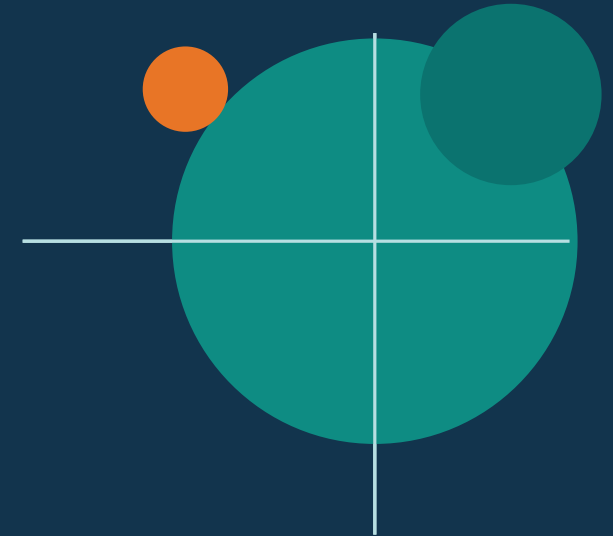

- | | | | |
|---|---|---|---|
|  01 EC-001-EC-010
Plans, roles, contacts and activation criteria |  02 EC-011-EC-020
Situational awareness, incident location and uncertainty |  03 EC-021-EC-030
Warnings, public information and communication channels |  04 EC-031-EC-040
Evacuation, shelter, cordons and route choices |
|  05 EC-041-EC-050
Accessibility, assistance and inclusive alternatives |  06 EC-051-EC-060
Resources, assembly areas, welfare and accountability |  07 EC-061-EC-070
Multi-agency liaison, handover and authoritative command |  08 EC-071-EC-080
Recovery, exercises, lessons and continuity |

Evidence support for emergency coordination, never command automation

PURPOSE

This catalogue frames the questions an emergency coordinator may need to ask before, during and after an incident. Each card links a distinct decision to proposed evidence, authoritative ownership, an explicit analysis type, minimum evidence, uncertainty and a safe failure response.

EVIDENCE POSTURE

Sensors, integrations and analytics are proposals until deployment, mapping, commissioning, permission and current health are independently verified. A measured or logged state may corroborate an authoritative record; it does not create operational authority. Every answer must show source age and evidence cutoff.

HISTORICAL SPATIAL REFERENCE

The May 2021 floor plan may support historical geometry only. It cannot establish current room use, routes, access, services, hazards, closures or temporary conditions. Current controlled maps and competent owners always take precedence.

NON-NEGOTIABLE BOUNDARY

The service must not issue or authorise emergency commands; control alarms, doors, lifts, ventilation or other emergency systems; identify or track people; infer individual health or assistance needs; create personal emergency plans; disclose beyond permission; certify safety or readiness; or override current command, emergency services, plans or authorised communications.

AUTHORITY ORDER

1. Current incident command and responding emergency services.
2. Current approved plans, directions and formally delegated authority.
3. Competent owners of hazards, systems, information and affected services.
4. Proposed telemetry and analytics as corroborating evidence only.

HONEST OUTCOMES

A safe answer is supported, qualified, conflicting, unsupported or not assessed. Missing minimum evidence must remain visible. The service should state the gap, preserve uncertainty and route the decision to current command or the named competent owner.

How to read every question card

01

STAKEHOLDER QUESTION

A natural operational decision question, scoped to what the coordinator genuinely needs to establish, prepare or escalate.

02

SENSORS AND TELEMETRY

Proposed modalities and locations; spatial and temporal coverage; sampling or aggregation; calibration, clock alignment, uptime, gaps, drift, provenance and quality limits.

03

AUTHORITATIVE SUPPORTING DATA

Named owners and precedence; effective, observed, ingested and retrieved times; permissions; versions and source paths; staleness rules and conflicts.

04

ANALYSIS REQUIRED

Operation type, decision interval, minimum evidence, method, uncertainty and a safe failure action when evidence is inadequate.

05

ANSWER BOUNDARY

What the service must not infer, disclose, promise, certify, authorise, control or substitute for current command and competent professionals.

06

WHY THIS IS USEFUL

The concrete preparation, coordination, escalation, briefing, handover or recovery action enabled by a defensible answer.

EVIDENCE GRAMMAR

Lookup retrieves a controlled record. Observation reports a measured or logged state. Calculation derives a value from stated inputs. Estimate quantifies an uncertain current value. Forecast projects a future range. Comparison tests evidence against an explicit requirement. Diagnosis attributes a mechanism and normally requires a competent specialist. Recommendation proposes an option for authorised human decision.

Eighty questions across the emergency coordination lifecycle

#	CATEGORY	QUESTION IDS	CARD PAGES	PRIMARY DECISION PHASE
01	Plans, roles, contacts and activation criteria	EC-001-EC-010	5-9	Preparedness and activation
02	Situational awareness, incident location and uncertainty	EC-011-EC-020	10-14	Live awareness
03	Warnings, public information and communication channels	EC-021-EC-030	15-19	Authorised communications
04	Evacuation, shelter, cordons and route choices	EC-031-EC-040	20-24	Movement and protection
05	Accessibility, assistance and inclusive alternatives	EC-041-EC-050	25-29	Inclusive alternatives
06	Resources, assembly areas, welfare and accountability	EC-051-EC-060	30-34	Operational support
07	Multi-agency liaison, handover and authoritative command	EC-061-EC-070	35-39	Multi-agency command
08	Recovery, exercises, lessons and continuity	EC-071-EC-080	40-44	Recovery and learning
USE SEQUENCE Start with the current command question. Identify the authoritative owner. Check minimum evidence and source age. Keep conflicts and unknowns visible. Communicate only the answer supported by permission, provenance and uncertainty.				

EC-001

STAKEHOLDER QUESTION

Which current plan, annex and operating assumptions should I place in the coordination pack for this incident?

SENSORS AND TELEMETRY

Proposed only: the approved plan-register API, commissioned alarm-panel event class at the fire-control interface, BMS operating-mode points at the plant gateway, and current booking or event flags by authorised zone. Coverage: the whole building and the reported or alarmed zones; no historical room-use assumption. Timing: at activation and after any material incident, activity or building-mode change; digital feeds need a five-minute heartbeat. Aggregate to zone, service and plan-scope states, never to person-level occupancy. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: bookings do not prove actual use, alarm classes can be incomplete, and telemetry cannot decide plan applicability.

AUTHORITATIVE SUPPORTING DATA

Owners: emergency planning lead, building manager, fire-safety lead, hazard owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and the controlled plan register and the competent hazard owner; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup plus rule-based comparison, not diagnosis or command recommendation. Decision interval: at activation and whenever a scope-defining fact changes. Minimum evidence: a current plan version and effective date, a confirmed incident class or hazard, current building mode, and at least one reliable location or activity fact. Method: filter current plans and annexes by scope, hazard, zone, time and activity; display all plausible matches and unmet conditions. Uncertainty: unknown activity, uncertain zone mapping and conflicting incident classifications must remain visible. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare a plan active, interpret legal compliance, invent an annex, or use the historical floor plan as proof of current use. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can assemble the correct controlled pack and obtain an owner decision on any ambiguous applicability before briefing others.

EC-002

STAKEHOLDER QUESTION

Which coordination functions are confirmed for the next operational period, and which need an authorised backup or owner?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the current duty-roster integration, role acknowledgements, authorised control-room role sign-in and backup-assignment records. Coverage: required coordination functions and duty periods only, not continuous personal location. Timing: on roster change, activation, acknowledgement or sign-out, with a ten-minute freshness target during activation. Aggregate to required, assigned, acknowledged and backup status by function; suppress personal details unless separately authorised. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: sign-in does not prove presence, competence, willingness or readiness, and informal substitutions may be missing.

AUTHORITATIVE SUPPORTING DATA

Owners: emergency planning lead, security control room, duty-roster owner and each functional lead. Precedence: current incident command and emergency services, then the current approved plan or direction and the current role matrix, authorised roster and functional lead confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised command, emergency planning staff, duty coordinators and the relevant functional lead. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and comparison of required versus recorded function coverage. Decision interval: at activation and on every material role or duty change. Minimum evidence: the current required-function list, authorised assignments, acknowledgement state and confirmation of any substitution. Method: compare required, assigned, acknowledged and backup states; keep unknown separate from absent and flag incompatible overlaps. Uncertainty: late acknowledgements, stale rosters and role-name mismatches can create false gaps or false assurance. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not appoint a role holder, infer competence from sign-in, publish names to unauthorised users, or claim that an unconfirmed function is covered. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can assign follow-up to the authorised lead, secure a backup and expose functions that are still genuinely uncovered.

EC-003

STAKEHOLDER QUESTION

Which approved contact route is reachable for every required internal and external role, and what fallback order applies?

SENSORS AND TELEMETRY

Proposed only: directory synchronisation, telephony and radio endpoint health, mass-notification gateway status, radio-charger telemetry and approved test acknowledgements. Coverage: authorised emergency channels, shared role endpoints and external service contact routes, not personal device location. Timing: continuous health where supported, a five-minute summary during activation, and event records for tests or failures. Aggregate to channel and role-endpoint availability; expose personal numbers only under explicit contact-directory permission. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a successful ping or test does not prove a person will answer, carrier status may lag, and external emergency numbers must never be auto-dialled.

AUTHORITATIVE SUPPORTING DATA

Owners: telecoms service owner, security control room, emergency planning lead and each external contact-list owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the controlled contact directory and the receiving service's current published or confirmed route; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup plus observation of endpoint health and comparison with the authorised fallback sequence. Decision interval: at activation, on failed contact, and after any channel-state change. Minimum evidence: a current contact entry, at least one permitted endpoint-health observation or recent test, and an approved fallback sequence. Method: rank only the documented routes by current evidence; label reachability as tested, observed healthy, failed or unknown. Uncertainty: endpoint health is not human availability, and test evidence may not represent incident load or network congestion. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not initiate emergency calls, send live alerts, disclose personal contact data beyond permission, or present an untested route as reachable. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can test the primary route, move to the approved fallback and avoid losing time on obsolete contact details.

EC-004

STAKEHOLDER QUESTION

Which activation or escalation criteria are evidenced as met, not met, conflicting or still unknown?

SENSORS AND TELEMETRY

Proposed only: commissioned alarm-panel events, sprinkler or utility trip states, fixed hazard-detector readings at verified risk points, aggregate occupancy bands and authorised incident reports. Coverage: the building and directly relevant external interfaces at asset or zone level. Timing: event-driven with one-minute consolidation during activation; retain native sample periods and raw event times. Aggregate to criterion-level evidence states and zone bands, never to individuals. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: threshold alarms can be false, suppressed or delayed; fixed sensors cover only their commissioned locations and cannot replace a competent report.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency planning lead, fire-safety or hazard owner, building manager and control-room operator. Precedence: current incident command and emergency services, then the current approved plan or direction and the current approved activation matrix and competent professional interpretation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and criterion-by-criterion comparison, not automated activation or causal diagnosis. Decision interval: on first report, each material evidence change, and every five minutes while a threshold remains uncertain. Minimum evidence: the current criterion set, at least one attributable observation for each claimed criterion, and verified sensor or report provenance. Method: evaluate every criterion separately as met, not met, unknown or conflicting; retain threshold tolerance, source age and overrides. Uncertainty: sensor uncertainty, alarm inhibition, missing calibration and contradictory reports can change the classification. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare activation, escalation or stand-down; infer a hazard from a generic environmental reading; or treat absence of telemetry as evidence that a criterion is not met. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can present command with a criterion-by-criterion evidence table and target checks at the unknown or disputed conditions.

EC-005

STAKEHOLDER QUESTION

Which hazard-specific annexes, specialist advice and prerequisite controls must be available before the next coordination briefing?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the controlled hazard register, safety-data-sheet repository, utility and plant asset registers, permit-to-work records, specialist on-call directory and any commissioned asset alarm linked to the reported zone. Coverage: the reported hazard, affected asset or zone and connected services; no inference about unrecorded substances or activities. Timing: on incident classification and whenever the hazard, asset or permit status changes. Aggregate to hazard class, asset, zone and required-control status; do not expose confidential inventory details beyond need-to-know. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: registers may be incomplete, product names may be ambiguous, and an alarm cannot identify an unknown substance or mechanism.

AUTHORITATIVE SUPPORTING DATA

Owners: hazard owner, laboratory or workshop manager, estates engineering, fire-safety lead, emergency planning lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and the current hazard register, current permit or isolation record, controlled SDS and competent specialist advice; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised command, emergency coordinators, competent hazard owners and responders with an operational need. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and scope comparison, with diagnosis explicitly excluded unless supplied by a competent specialist. Decision interval: at initial classification and each confirmed change in hazard identity or affected asset. Minimum evidence: a confirmed or bounded hazard description, current asset or zone reference, and at least one current authoritative register or specialist source. Method: retrieve only applicable annexes and controls, show prerequisites and unresolved identity conflicts, and keep generic precautions separate from incident-specific advice. Uncertainty: mislabelled assets, outdated SDS versions and uncertain hazard identity must prevent a specific recommendation. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not diagnose the incident, identify an unknown substance, prescribe specialist controls, or imply that assembled documents make the response safe. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare the right specialist material and contacts before the incident develops beyond the initial generic response.

EC-006

STAKEHOLDER QUESTION

Which temporary works, events, system impairments or access changes invalidate assumptions in the current plan today?

SENSORS AND TELEMETRY

Proposed only: permit-to-work and impairment registers, current event or room-booking flags, approved closure records, access-controller door states, temporary barrier reports and contractor-presence bands. Coverage: all plan-critical routes, systems, zones and services, using current mapped identifiers. Timing: on permit, impairment, event or closure change; door-state events as generated and a five-minute time-stamped consolidated view. Aggregate to asset, route, zone and service status; contractor and occupancy data only as anonymous bands. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a door contact does not prove passability, bookings do not prove presence, and unrecorded temporary changes remain invisible.

AUTHORITATIVE SUPPORTING DATA

Owners: building manager, fire-safety lead, permit issuer, event owner, security control room and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current impairment, permit, closure and event records confirmed by the responsible owner; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and comparison against explicit plan assumptions. Decision interval: before activation briefing and whenever a temporary-control record or corroborating observation changes. Minimum evidence: the current plan assumptions, current temporary-change registers and at least one owner-confirmed status for each material exception. Method: map each change to the plan assumption it affects, distinguish recorded fact from telemetry corroboration, and show unverified reports separately. Uncertainty: mapping gaps, late permit closure and undocumented barriers can make the result incomplete. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer that no change exists because no record is found, declare a route usable from a door state, or cancel or approve work or events. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can flag plan assumptions that no longer hold and request an authorised temporary control or plan clarification.

EC-007

STAKEHOLDER QUESTION

Who currently holds authority to approve warnings, closures, movement advice, shelter advice and stand-down messages?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the current command declaration, controlled approval matrix, delegation records, duty-role acknowledgements and message-approval workflow trace. Coverage: decision types, command phases and authorised roles only; no personal location or behavioural monitoring. Timing: on command or delegation change and at every proposed message approval. Aggregate to role and approval status; reveal named approvers only to users with an operational need and directory permission. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: workflow access does not create authority, delegations can be time-limited, and an electronic approval may be incomplete or revoked.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency planning lead, institutional governance owner and each delegated decision owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the current command structure, approved delegation and live confirmation from the responsible authority; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: current command, authorised emergency coordinators, governance owners and message approvers. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: authoritative lookup and comparison, not recommendation of who should hold authority. Decision interval: before routing each decision or communication and after any command transfer. Minimum evidence: a current approval matrix, incident command state, applicable delegation and effective times. Method: match the decision type and phase to the authorised role, display delegation scope and expiry, and flag ambiguous or conflicting authority. Uncertainty: role-title mismatch, expired delegation and parallel command records must remain unresolved until the competent authority confirms. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not create, transfer or infer authority; approve content; expose personal details unnecessarily; or treat workflow access as permission to command. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can route each approval to the correct authority and keep an traceable separation between advice, decision and publication.

EC-008

STAKEHOLDER QUESTION

Which coordination systems are ready, degraded or unavailable, and which approved manual fallback can be used for each?

SENSORS AND TELEMETRY

Proposed only: PA and visual-alarm self-test outputs, mass-notification gateway health, radio repeater and charger status, incident-room power and UPS telemetry, network gateway health, refuge-communication self-tests and printer or display status. Coverage: the commissioned coordination infrastructure and its service dependencies, by asset and served zone. Timing: native events plus a one-minute health summary during activation and last-successful-test time. Aggregate to asset, service and zone state; no device-user tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: self-tests cover only tested functions, network health may not prove end-to-end delivery, and battery runtime depends on actual load and condition.

AUTHORITATIVE SUPPORTING DATA

Owners: estates engineering, IT network operations, security control room, fire-safety systems owner, telecoms owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current owner status, approved fallback procedures and competent system diagnosis; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and comparison; diagnosis is limited to explicit vendor fault codes and dependency checks, not root-cause certainty. Decision interval: at activation, on any fault event and every five minutes while a critical service is degraded. Minimum evidence: verified asset mapping, current heartbeat or test result, dependency status and a current approved fallback for any claimed degraded service. Method: classify available, degraded, failed or unknown; trace known dependencies and show whether fallback readiness is observed, tested or merely documented. Uncertainty: partial self-tests, stale heartbeat, clock drift and hidden upstream failures can produce false assurance. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not certify system readiness, trigger tests or resets, remotely control equipment, diagnose beyond explicit fault evidence, or promise fallback performance. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can switch deliberately to a tested fallback and tell command which capability has been lost rather than assuming it still works.

EC-009

STAKEHOLDER QUESTION

Which first-phase coordination actions are complete, overdue, blocked or awaiting authoritative confirmation?

SENSORS AND TELEMETRY

Proposed only: the controlled incident checklist, authorised action acknowledgements, call and message logs, work-order or isolation status, and relevant asset events that can corroborate a recorded action. Coverage: the active incident checklist and its assigned functions, services and zones. Timing: on each authorised update, with a one-minute event ledger during the initial phase. Aggregate to action state, owner function and dependency; do not expose personal performance data. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a system event may occur without the intended action, an acknowledgement may be mistaken, and off-system work may be absent.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency coordination lead, action owners, control-room operator and relevant asset or service owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the authorised incident log and confirmation from the function responsible for each action; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and dependency comparison, not automatic completion inference. Decision interval: continuously during the initial phase and at every formal situation report. Minimum evidence: the current approved checklist, an accountable function, timestamped confirmation for each completed claim and evidence for any stated block. Method: compare planned, acknowledged, corroborated and dependency states; classify completion as confirmed, reported only, blocked, open or unverifiable. Uncertainty: missing acknowledgements, delayed logs and non-equivalent telemetry must remain explicit. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not mark an action complete solely from a sensor event, assign blame, issue the action, or close a blocked item without the responsible owner's confirmation. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can focus the next coordination cycle on overdue, blocked and ownerless actions instead of repeating completed work.

EC-010

STAKEHOLDER QUESTION

What evidence supports a move to the next response phase or stand-down, and which conditions remain unresolved?

SENSORS AND TELEMETRY

Proposed only: the controlled phase-transition criteria, command decisions, current alarm and utility states, competent inspection results, open-action status and approved public-information records. Coverage: the incident, affected zones, critical systems and unresolved dependencies. Timing: at each proposed phase assessment and immediately after a material safety, command or system-state change. Aggregate to criterion and evidence state; no person-level inference. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: stable telemetry does not prove risk removal, inspections may cover only part of an area, and command criteria can include non-machine evidence.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency planning lead, competent safety or engineering owners, communications lead and building manager. Precedence: current incident command and emergency services, then the current approved plan or direction and the current command decision, approved transition criteria and competent professional release or restriction; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and bounded decision-support synthesis for authorised consideration, never a phase-change decision. Decision interval: at formal phase assessments and whenever a mandatory criterion changes. Minimum evidence: the current criteria set, current command state, competent status for each mandatory condition and a complete list of unresolved actions or restrictions. Method: evaluate each condition as satisfied, outstanding, conflicting or not assessed; separate observed stability from authorised release. Uncertainty: unknown residual hazards, stale inspections and unresolved command records must block a supported conclusion. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare a phase change, stand-down or reoccupation; infer that risk has ended from stable readings; or authorise public messaging. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare an evidence-backed phase assessment while keeping the actual transition or stand-down decision with authorised command.

EC-011

STAKEHOLDER QUESTION

What incident location can I state now, at what precision, and which possible locations remain unresolved?

SENSORS AND TELEMETRY

Proposed only: addressable alarm-device events, manual call-point identifiers, fixed leak or hazard-detector events, utility trip locations and authorised human reports. Coverage: only commissioned devices and current mapped zones, rooms or assets relevant to the incident. Timing: event-driven; preserve native event time, gateway receipt time and report time, with a one-minute time-stamped consolidated view. Aggregate to asset or zone locations and confidence tiers; never use Wi-Fi, Bluetooth or access logs to locate people. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: an alarm address is not necessarily the incident origin, device maps can be stale, and manual reports can be approximate.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, control-room operator, fire-safety or hazard-system owner, building manager and report owner. Precedence: current incident command and emergency services, then the current approved plan or direction and current command-confirmed location and the current commissioned device and asset map; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation plus geospatial lookup and confidence classification, not origin diagnosis. Decision interval: on first report and every new location-bearing observation. Minimum evidence: at least one attributable authoritative report or a commissioned device event with verified current mapping; two independent sources for a 'corroborated' label. Method: plot evidence by native precision, retain source and time, and classify reported, detected, corroborated, conflicting or unknown without averaging locations. Uncertainty: mapping error, detector coverage and report ambiguity limit precision; confidence must not be expressed as certainty. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not identify the reporting person, claim the exact origin or spread path, triangulate individuals, or treat a detector address as proof of the hazard source. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can state a defensible location and precision in the briefing while directing verification to unresolved areas.

EC-012

STAKEHOLDER QUESTION

Which zones should the current picture mark as confirmed affected, suspected, apparently unaffected or not assessed?

SENSORS AND TELEMETRY

Proposed only: commissioned alarm zones, sprinkler or suppression events, calibrated fixed environmental points, utility states, current door or damper events and authorised inspection reports. Coverage: current operational zones and connected services around the reported incident. Timing: event-driven with one-minute zone aggregation; retain sensor-native sample intervals and inspection times. Aggregate to zone evidence states; anonymous occupancy bands may be shown separately but never used to label a zone safe. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: sensor coverage is discontinuous, compartment boundaries may have changed, and absence of an alarm does not prove absence of impact.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, fire-safety or hazard owner, estates engineering, building manager and competent inspectors. Precedence: current incident command and emergency services, then the current approved plan or direction and current command designation, competent inspection and current approved compartment, service and zone records; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and bounded spatial estimate, with comparison across independent evidence. Decision interval: at every situation update and after a material alarm, inspection or service-state change. Minimum evidence: current zone definitions, at least one attributable observation for each confirmed claim, and explicit evidence-age limits. Method: classify zones separately; use current adjacency and service relationships only where verified, and mark modelled extension as an estimate rather than observation. Uncertainty: unmapped boundaries, sensor blind spots and time lag can understate or overstate the affected area. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare any zone safe, infer exposure or health effects, extend cordons, or use the May 2021 floor plan as a current compartment or use record. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can maintain an honest zone-status map and prevent unassessed space from being described as unaffected.

EC-013

STAKEHOLDER QUESTION

Are the incident indicators worsening, stable, decreasing or too incomplete to classify over the current decision window?

SENSORS AND TELEMETRY

Proposed only: time series from incident-relevant alarm counts, calibrated temperature or gas points, sprinkler or leak flow, utility load or trip states and authorised repeated observations. Coverage: only verified sensors and reports within the affected or monitored zones. Timing: use native sampling, aggregate to one-minute or hazard-appropriate intervals, and retain raw timestamps and clock offsets. Aggregate to zone-level trends and confidence bands; suppress individual or device-user information. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: sensor saturation, missing samples, changing ventilation, relocated hazards and intervention effects can distort trends.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, competent hazard owner, estates engineering, fire-safety systems owner and authorised observation lead. Precedence: current incident command and emergency services, then the current approved plan or direction and competent interpretation of the hazard and the current incident log; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and trend calculation; forecast is excluded unless a validated hazard-specific model and minimum horizon evidence exist. Decision interval: every five minutes or at a hazard-owner-defined interval during active monitoring. Minimum evidence: a defined window, at least three valid time points per claimed series, verified calibration and clock alignment, and no unhandled critical gap. Method: calculate robust slope or state change per source, compare independent indicators and show disagreement; do not combine unlike units into a single score. Uncertainty: short windows, interventions, drift and missingness can reverse apparent direction; confidence must reflect coverage and noise. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not claim that the incident is controlled, predict spread from a generic trend, infer causation, or replace competent hazard interpretation. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can report the trend at the right confidence level and request more observation when the window is too incomplete.

EC-014

STAKEHOLDER QUESTION

Which reports, alarms or measurements disagree, and who must resolve each conflict before the next briefing?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the incident log, control-room calls, approved mobile reports, alarm events, BMS and utility status, and source-health metadata. Coverage: all sources used in the current situation picture, with their native zone or asset scope. Timing: on each new report or event, with immediate conflict flags and a five-minute reconciliation view. Aggregate to claim, source, time and scope; do not expose reporter identity beyond authorised need. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: sources may describe different times or areas, and majority agreement does not prove correctness.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency coordination lead, control-room operator, competent system owners and each report-owning function. Precedence: current incident command and emergency services, then the current approved plan or direction and current command-confirmed facts and the competent owner for the disputed subject; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and provenance analysis, not automated truth selection. Decision interval: continuously, with a formal conflict assessment before each situation report. Minimum evidence: at least two attributable claims about the same defined fact, aligned to comparable time and scope. Method: normalise terminology and time, compare claim values and evidence quality, and preserve every disagreement with the responsible owner. Uncertainty: clock mismatch, differing spatial scope and copied reports can create apparent consensus or conflict. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not select a winner by vote, suppress a minority report, infer dishonesty, or merge incompatible observations into a single fact. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can assign each material conflict to an authoritative owner and stop disputed evidence silently entering the common picture.

EC-015

STAKEHOLDER QUESTION

What is the verified operational state of each alarm, suppression, ventilation, lift, access and utility system relevant to this incident?

SENSORS AND TELEMETRY

Proposed only: fire-alarm and suppression panel events, BMS fan and damper points, lift-controller status, access-controller door or lock state, electrical and water service telemetry and approved manual confirmations. Coverage: incident-relevant assets, dependencies and served zones only. Timing: native events plus a one-minute state table; record command time, device time and gateway receipt time. Aggregate to asset, service and zone state; never infer people from access or lift events. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: controller states may be stale or overridden, a closed contact does not prove physical closure, and system status does not certify effectiveness.

AUTHORITATIVE SUPPORTING DATA

Owners: fire-safety systems owner, estates engineering, lift maintainer, security systems owner, utility owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current competent owner confirmation and the current approved system operating or isolation state; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and dependency comparison; diagnosis is limited to explicit fault and override codes. Decision interval: on activation, every material state change and each situation report. Minimum evidence: verified asset and zone mapping, current status or recent manual confirmation, known override state and dependency provenance. Method: display commanded, reported, faulted, overridden and unknown states separately; trace only verified service dependencies. Uncertainty: stale controller caches, manual overrides and failed gateways can make a digital state misleading. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not operate, reset, isolate or override systems; claim a system is effective from a status bit; or infer route safety or occupancy. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can brief responders on system states and dependencies without mistaking a digital status for a competent safety judgement.

EC-016

STAKEHOLDER QUESTION

Which environmental observations are reliable enough to quote in the responder brief, with what limits and age?

SENSORS AND TELEMETRY

Proposed only: calibrated fixed gas detectors at registered risk points, temperature and humidity sensors in plant or incident zones, water-depth or leak probes, smoke-obscuration devices where commissioned, and a local external weather station. Coverage: only the known sensing volume around each verified device; no extrapolation to unsensed rooms without an approved model. Timing: native hazard-appropriate sampling, with one-minute summaries unless the competent owner requires a different interval. Aggregate to asset or zone time series with units, detection limits and quality flags. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: measurements are local, cross-sensitive and potentially saturated; generic air-quality or CO2 sensors must not be repurposed as hazard detectors.

AUTHORITATIVE SUPPORTING DATA

Owners: competent hazard owner, estates engineering, fire-safety systems owner, environmental health or safety lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and competent professional interpretation, current calibration records and current incident measurements; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and comparison with approved instrument limits; diagnosis and health-risk assessment are excluded. Decision interval: at each responder briefing or owner-defined threshold event. Minimum evidence: verified device type and location, valid calibration, known detection range, current sample, clock alignment and no critical quality alarm. Method: report value, unit, location, sample time, quality status and change; compare only with approved operational thresholds supplied by the competent owner. Uncertainty: cross-sensitivity, placement, lag, drift and environmental interference limit representativeness. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not diagnose a substance or source, infer personal exposure or health effect, set a safety limit, declare an area safe, or substitute a consumer sensor for a safety instrument. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can quote only measurements that have known location, age and quality, and omit readings that would mislead responders.

EC-017

STAKEHOLDER QUESTION

Which utility or building-service losses are confirmed or possible, and which response dependencies do they threaten?

SENSORS AND TELEMETRY

Proposed only: electrical breaker and UPS telemetry, water flow or pressure, network and telephony health, BMS plant states, lift power status, access-control power and authorised outage reports. Coverage: critical services, their verified dependencies and the incident-affected zones. Timing: event-driven with one-minute service summaries and explicit last-good times. Aggregate to service, dependency, zone and state; no person-level service-use inference. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: telemetry may stop when power or network fails, dependency records can be incomplete, and local service can differ from upstream status.

AUTHORITATIVE SUPPORTING DATA

Owners: estates engineering, IT operations, telecoms owner, security systems owner, utility providers and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current owner-confirmed outage or isolation state and approved dependency records; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation, lookup and dependency calculation, not root-cause diagnosis. Decision interval: at activation, each material outage or restoration and every situation report. Minimum evidence: current service states, verified dependency links, time-aligned observations and owner confirmation for any critical isolation. Method: construct a dependency graph with observed, reported and unknown states separated; identify only directly supported downstream impacts. Uncertainty: cascading dependencies, gateway failure and stale diagrams can hide or exaggerate impact. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not operate utilities, infer restoration time, diagnose the fault, or promise continuity of a dependent service. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can identify threatened response functions, request owner confirmation and plan authorised workarounds around confirmed service losses.

EC-018

STAKEHOLDER QUESTION

Where are the evidence blind spots now, and are they caused by missing coverage, failed devices, stale mapping, clock error or access restrictions?

SENSORS AND TELEMETRY

Proposed only: sensor inventory and coverage metadata, heartbeat and uptime logs, calibration due dates, clock-offset monitoring, gateway health, mapping versions and access-control assurance status. Coverage: every source proposed for the incident picture, including unsensed zones and disconnected integrations. Timing: continuous health where available, a five-minute quality summary during activation, and immediate flags on critical loss. Aggregate to source, asset, zone and quality dimension; no inference about people in blind spots. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: inventory records can be stale, a heartbeat does not prove measurement quality, and missing permissions may be mistaken for missing data.

AUTHORITATIVE SUPPORTING DATA

Owners: each sensor or integration owner, information-governance owner, emergency planning lead, building manager and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current source-owner health assessment, commissioning record and permission decision; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: data-quality diagnosis and coverage comparison, not hazard diagnosis. Decision interval: before each analytical answer and at every critical source-health change. Minimum evidence: a complete source list for the claim, current mapping, heartbeat or test status, calibration status, clock offset and permission state. Method: score each required evidence dimension separately and map unsupported zones or periods; do not average critical failures into a generic quality score. Uncertainty: silent drift, unmonitored gateways and incomplete inventories mean the blind-spot map can itself be incomplete. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not treat a blind spot as safe, infer conditions in an unsensed area, bypass permissions, or hide missing evidence behind a confidence score. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can show where the picture is weak, commission targeted checks and avoid false confidence caused by a healthy-looking dashboard.

EC-019

STAKEHOLDER QUESTION

What non-identifying occupancy or activity context is credible for the affected zones, and what cannot be known from it?

SENSORS AND TELEMETRY

Proposed only: privacy-preserving overhead time-of-flight or bidirectional beam counters at commissioned entrances, room-booking or event flags and aggregated access-event counts that have already been approved for emergency use. Coverage: zone entrances and authorised activity schedules; no device, face, credential or continuous-path tracking. Timing: counter samples at their native rate aggregated to five-minute bands; booking and access data by event time. Aggregate to low, medium, high or unknown occupancy bands and scheduled activity type; suppress small counts where re-identification risk exists. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: counters double count and miss tailgating, bookings differ from attendance, and access events do not show who remains inside.

AUTHORITATIVE SUPPORTING DATA

Owners: information-governance owner, security systems owner, space or event owner, emergency planning lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and authorised manual accountability and current event-owner confirmation for operational decisions; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and estimate, explicitly not headcount, identity lookup or accountability. Decision interval: at activation and at five-minute intervals while aggregate context remains operationally useful. Minimum evidence: verified counter placement and calibration, current uptime and clock alignment, approved aggregation, and at least one contextual source. Method: calculate bounded occupancy bands with known error, compare with bookings as separate evidence and label areas with no reliable coverage as unknown. Uncertainty: flow counters cannot determine residual occupancy, and privacy suppression reduces precision. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not name or locate individuals, infer vulnerability or purpose, conduct roll call, claim an exact headcount, or use aggregate counts as proof that an area is clear. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prioritise broad communication or verification effort by activity band while leaving accountability to authorised human procedures.

EC-020

STAKEHOLDER QUESTION

Which facts are ready for the next situation report, and which must be labelled qualified, conflicting, unsupported or not assessed?

SENSORS AND TELEMETRY

Proposed only: the incident log, current command decisions, verified alarm and service states, authorised reports, approved aggregate occupancy context, source-health metadata and previous situation-report versions. Coverage: the incident, affected zones, critical dependencies and decision-relevant uncertainties. Timing: on demand and before each situation report; freeze source observations with native and retrieval times. Aggregate to claim-level evidence with source and confidence state; exclude unnecessary personal data. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a coherent display can hide common-source dependence, copied reports and stale telemetry.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency coordination lead, control-room operator, communications lead and competent subject owners. Precedence: current incident command and emergency services, then the current approved plan or direction and current command-approved facts and each competent owner's confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and evidence synthesis; no new diagnosis, forecast or command recommendation. Decision interval: before every formal situation report and after a material correction. Minimum evidence: current command state, attributable sources for each included claim, explicit time and scope, source-health checks and unresolved-conflict list. Method: build a claim-evidence matrix, retain dissenting or stale evidence, and label supported, qualified, unsupported or not assessed. Uncertainty: source dependence, retrieval delay and inconsistent zone terminology can create misleading certainty. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not convert a disputed claim into consensus, omit material uncertainty, disclose unnecessary personal information, or present the snapshot as an authoritative command record before approval. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can issue a concise situation report whose claims are traceable, time-bounded and clearly separated from uncertainty.

EC-021

STAKEHOLDER QUESTION

Which approved message template best matches the incident phase, audience and confirmed facts, and what authorisation is still required?

SENSORS AND TELEMETRY

Proposed only: the controlled message-template repository, current command decisions, confirmed incident facts, approved audience and zone groups, and message-approval workflow. Coverage: authorised audiences, channels and current incident phase; no location tracking or inferred audience needs. Timing: on each proposed warning, update, correction or withdrawal. Aggregate to template, phase, audience group, zone and approval state; reveal recipient data only through authorised channel systems. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: templates may be outdated, a matching label does not prove content suitability, and confirmed facts can change quickly.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, communications lead, emergency planning lead, accessibility lead and institutional communications owner. Precedence: current incident command and emergency services, then the current approved plan or direction and current command-approved facts and the controlled communications approval procedure; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and comparison, not autonomous content generation or approval recommendation. Decision interval: before any message is prepared for release and after any material fact change. Minimum evidence: a current approved template, confirmed incident phase and audience scope, current command facts, and named approval route. Method: retrieve candidate templates, compare mandatory fields and exclusions, and show missing approvals or facts without drafting unsupported instructions. Uncertainty: uncertain incident facts, ambiguous audience scope and conflicting template versions must remain visible. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not issue, approve or materially rewrite emergency instructions; select a message solely from sensor data; or present generated text as authorised. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can place the right draft before the authorised approver without inventing wording or carrying unsupported facts into the message.

EC-022

STAKEHOLDER QUESTION

Which authorised channels can currently reach each relevant zone and audience, and which are degraded, failed or untested?

SENSORS AND TELEMETRY

Proposed only: PA amplifier and zone self-tests, visual-alarm circuit status, mass-notification gateway health, SMS and email delivery-service status, digital-signage player heartbeats, website status and radio repeater health. Coverage: commissioned channels, served zones and approved audience groups. Timing: native events plus a one-minute channel table during activation and last successful test time. Aggregate to channel, zone and service status; no individual delivery or device tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: self-test coverage is partial, a gateway can be healthy while downstream delivery fails, and carrier dashboards can lag.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, fire-safety systems owner, IT operations, telecoms provider, security control room and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current channel-owner status and approved fallback plan; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and comparison; diagnosis is limited to explicit service or device fault codes. Decision interval: at activation, on every fault and before each message release. Minimum evidence: verified channel-to-zone mapping, current health or test evidence, dependency state and approved fallback route. Method: classify available, degraded, failed or unknown and separate tested reach from nominal configuration. Uncertainty: silent endpoint failure, stale player heartbeat and network dependencies can overstate availability. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not trigger alarms or tests, send messages, certify reach, diagnose beyond explicit fault evidence, or expose subscriber information. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can choose an approved channel combination and arrange a fallback for audiences or zones with degraded coverage.

EC-023

STAKEHOLDER QUESTION

For each authorised message, what evidence shows creation, approval, issue, channel acceptance and area-level delivery?

SENSORS AND TELEMETRY

Proposed only: message-approval logs, PA controller event records, visual-alarm activation records, signage receipts, website publish logs and aggregate SMS or email gateway acceptance and delivery reports. Coverage: the specific approved message version, channels, zones and recipient groups. Timing: event-driven with native timestamps and a one-minute time-stamped consolidated transmission record. Aggregate to channel and authorised group totals; suppress individual read receipts and small-cell recipient details unless explicitly required and permitted. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: channel acceptance is not human receipt or comprehension, PA activation does not prove audibility, and delivery receipts can be delayed or inaccurate.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, channel owners, incident commander, information-governance owner and message approver. Precedence: current incident command and emergency services, then the current approved plan or direction and the approved message record and each channel owner's system log; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and cross-channel reconciliation, not inference of reach or understanding. Decision interval: after every issue, correction or withdrawal and before reporting communication status. Minimum evidence: the approved message identifier and hash, issue approval, channel event or receipt, target scope and aligned times. Method: match the exact message version to each channel event, classify submitted, accepted, delivered, failed or unknown, and preserve retries separately. Uncertainty: clock offsets, queued delivery, duplicated sends and gateway aggregation limit exact timing and reach claims. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not claim that everyone received, saw, heard or understood the message; identify non-recipients; or resend automatically. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can document what was actually authorised and transmitted, isolate channel failures and request a human-approved alternative.

EC-024

STAKEHOLDER QUESTION

Which accessible formats and complementary channel combinations are ready for this message, and where is coverage incomplete?

SENSORS AND TELEMETRY

Proposed only: template metadata for plain language, large print, captioned video, text alternatives and approved translations; visual-alarm status, induction-loop self-tests, digital-signage status and accessible web checks. Coverage: authorised message formats and commissioned accessible channels across current public and staff areas. Timing: on template release, channel test or incident activation; channel status consolidated every five minutes. Aggregate to format and zone coverage, not to inferred individual needs or disability. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: metadata does not prove usability, visual and audible coverage varies by environment, and an automated accessibility check cannot replace user or expert assessment.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, communications lead, fire-safety systems owner, web owner, information-governance owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and approved accessible communications standards, current expert assessment and command-authorised message content; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and coverage comparison, not personalisation or need inference. Decision interval: before each public message and whenever a channel or format becomes unavailable. Minimum evidence: the approved base message, at least one authorised accessible alternative, verified channel mapping and current test or expert-assessment status. Method: compare required formats and channels with available versions and zone coverage; label untested, missing and incompatible combinations. Uncertainty: environmental noise, lighting, device failure and translation version lag can reduce effective access. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer who needs an alternative, generate a personal communication plan, auto-translate emergency instructions without approval, or certify accessibility. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can request missing accessible formats or complementary channels before publication rather than assuming one channel reaches everyone.

EC-025

STAKEHOLDER QUESTION

Are all active channels presenting the same authorised message version, or is obsolete or partial content still live?

SENSORS AND TELEMETRY

Proposed only: content-management versions and hashes, PA script identifier, signage playlist state, website cache and publish records, SMS or email campaign identifiers and social-channel publication logs where institutionally authorised. Coverage: all authorised public-information channels and the exact incident message set. Timing: on every publish, correction, withdrawal and cache refresh, with immediate mismatch flags. Aggregate to channel and message-version status; no recipient profiling. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: cached pages, manually spoken announcements and copied text may not expose reliable version identifiers.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, channel content owners, message approver, incident commander and records manager. Precedence: current incident command and emergency services, then the current approved plan or direction and the latest command-approved message record and formal correction or withdrawal instruction; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and version reconciliation, not content approval or factual diagnosis. Decision interval: continuously while messages are live and before every situation report. Minimum evidence: the authoritative message identifier, approval and effective time, plus a retrievable publication record for each claimed channel. Method: compare hashes or controlled identifiers where possible, otherwise compare bounded text segments and flag manual channels as unverified. Uncertainty: cache delay, transcription differences and unsynchronised clocks can create temporary or hidden inconsistencies. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not withdraw or overwrite content automatically, declare manual announcements identical without evidence, or expose internal drafts. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can remove or correct obsolete content and maintain one authoritative message version across the live communication estate.

EC-026

STAKEHOLDER QUESTION

Which confirmed change requires an authorised message update, correction or withdrawal, and which channels remain outstanding?

SENSORS AND TELEMETRY

Proposed only: current approved message state, command decisions, confirmed incident facts, channel publication records and explicit correction or withdrawal acknowledgements. Coverage: the active message set and all channels on which each version remains live. Timing: on every confirmed fact or command change, and at a five-minute assessment cadence while urgent messages remain active. Aggregate to message, channel and action status; no individual-recipient monitoring. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: fact changes can be reported before approval, channel removal can lag, and absence of a receipt does not prove content remains live.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, communications lead, message approver, channel owners and emergency planning lead. Precedence: current incident command and emergency services, then the current approved plan or direction and current command-authorised update, correction or withdrawal decision; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and bounded comparison for authorised message consideration; not autonomous timing or release control. Decision interval: on each material confirmed change and before scheduled situation updates. Minimum evidence: the current approved version, confirmed changed fact or decision, affected audience or zone and channel publication state. Method: map changed facts to affected message statements, identify channels carrying those statements and show which require authorised action. Uncertainty: uncertain facts, approval delay and channel cache behaviour limit the timing conclusion. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not decide that a message must be issued or withdrawn, edit live content, infer public understanding, or treat an unconfirmed report as a correction trigger. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can give the approver a precise change trigger and a list of channels still carrying outdated information.

EC-027

STAKEHOLDER QUESTION

What recurring questions, misunderstandings or rumours are appearing in authorised contact channels, without profiling individuals?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use aggregated helpline and reception enquiry categories, approved web-form topic counts, call-centre queue metrics and authorised field-liaison summaries. Coverage: approved public-contact services and predefined incident information categories. Timing: aggregate in five- or fifteen-minute windows depending volume; retain source and coding version. Aggregate to topic, channel and time band; suppress free text, small cells and personal identifiers unless separately authorised for case handling. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: coding can be inconsistent, repeated contacts inflate counts, and absence of enquiries does not prove understanding.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, contact-centre owner, information-governance owner, field liaison and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and authorised contact-centre records and communications-lead interpretation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised communications, contact-centre and information-governance roles with disclosure-controlled outputs. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and comparison of topic frequencies, not sentiment analysis, identity profiling or causal inference. Decision interval: before each public-information assessment or when a predefined confusion threshold is met. Minimum evidence: an approved category scheme, sufficient aggregate volume for disclosure control, current time window and channel coverage statement. Method: count categories by channel and time, compare with previous authorised messages and flag only statistically and operationally material changes. Uncertainty: selection bias, repeat callers and coding drift can misrepresent the wider audience. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not scrape private or public social media without authority, infer emotion or vulnerability, identify callers, or auto-generate emergency advice from enquiry patterns. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare a factual clarification or FAQ request based on aggregate themes without creating profiles of people contacting the service.

EC-028

STAKEHOLDER QUESTION

Which zones and audience groups are within the authorised message scope, and which targeting inputs are too intrusive or uncertain to use?

SENSORS AND TELEMETRY

Proposed only: current PA and visual-alarm zone maps, digital-signage locations, approved role or distribution groups, current incident-zone designations and channel configuration. Coverage: authorised physical zones and pre-established groups only; no live personal-location targeting. Timing: on each message approval and whenever incident-zone or channel mapping changes. Aggregate to zone and approved group; never derive a group from personal movement, device proximity or inferred characteristics. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: zone maps may be stale, group membership can lag, and PA boundaries do not equal acoustic reach.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, communications lead, channel owners, information-governance owner and emergency planning lead. Precedence: current incident command and emergency services, then the current approved plan or direction and current command-approved audience scope and current channel-zone configuration; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and scope comparison, not person-level recommendation. Decision interval: before every targeted message and after any zone or audience change. Minimum evidence: an approved message, explicit audience or zone scope, current channel mapping and permission to use the selected group. Method: compare authorised scope with configured channel reach, flag spillover and gaps, and present broader fallback options for approval. Uncertainty: configuration drift, open spaces and shared channels can make targeting approximate. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not construct a target from access logs or device location, exclude individuals based on inferred need, or claim exact acoustic or visual reach. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can apply the authorised scope narrowly and reject person-level or weak targeting inputs that would create risk or false precision.

EC-029

STAKEHOLDER QUESTION

Which approved non-networked or low-technology warning fallbacks are ready if digital channels fail?

SENSORS AND TELEMETRY

Proposed only: radio and megaphone battery status, printer and notice-kit inventory, resilient phone endpoints, independent PA sections, runner or warden contact rosters and approved pre-printed message packs. Coverage: designated coordination points, public areas and authorised fallback routes. Timing: at activation, on primary-channel failure and after each fallback use or battery change. Aggregate to asset, location and function availability; no tracking of runners or wardens. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: inventory presence does not prove serviceability, batteries can degrade, and a roster does not prove immediate availability.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, security control room, estates or IT owner, emergency planning lead and relevant duty-function lead. Precedence: current incident command and emergency services, then the current approved plan or direction and the current approved communications fallback plan and owner-confirmed resource status; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and comparison with fallback requirements. Decision interval: on primary-channel degradation and every ten minutes while fallback remains necessary. Minimum evidence: a current fallback plan, mapped resource or function, recent test or inspection, battery or consumable status and authorised deployment owner. Method: match each failed primary channel to documented independent alternatives and show tested, available, depleted or unknown status. Uncertainty: shared dependencies and unrecorded resource movement can make an apparently independent fallback unavailable. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not dispatch people, issue messages, assume equipment is usable from presence alone, or disclose sensitive contact routes publicly. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare runners, radios, printed notices or other approved independent channels before network loss becomes a communication failure.

EC-030

STAKEHOLDER QUESTION

Is the communication record complete enough for the current briefing, handover and later inquiry, and what remains unverified?

SENSORS AND TELEMETRY

Proposed only: message approvals, channel submissions and receipts, PA and signage events, call and radio logs, correction or withdrawal records, template versions and source clock-health data. Coverage: all authorised incident communications and their channels, approvals and target scopes. Timing: event-driven with a reconciled timeline before each briefing and at incident close. Aggregate to message, version, approval, channel, zone and event state; minimise personal contact details. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: manual announcements and external agency messages may be missing, logs can use different clocks, and retries create duplicates.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, incident log keeper, channel owners, records manager, information-governance owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and the authorised incident log and source-owner records; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, timeline calculation and reconciliation, not inference of message reach. Decision interval: before each formal briefing, handover and post-incident evidence freeze. Minimum evidence: the message register, approval records, channel logs, clock offsets and explicit record of manual or external communications. Method: deduplicate by controlled identifier and time, align clocks, identify missing expected events and retain unmatched records. Uncertainty: clock drift, unavailable third-party logs and undocumented speech can prevent a complete timeline. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not fabricate missing events, infer delivery or comprehension, alter source logs, or declare completeness without documenting excluded channels. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can support live handover and later inquiry with a versioned record, while explicitly listing missing approvals, transmissions or receipts.

EC-031

STAKEHOLDER QUESTION

Which current movement options can command consider from each affected zone to an authorised boundary or destination?

SENSORS AND TELEMETRY

Proposed only: current route and closure records, final-exit door contacts, access-controller lock state, lift and stair service status, incident alarm zones, authorised obstruction reports and anonymous flow counters at selected chokepoints. Coverage: current mapped routes from affected zones to authorised destinations; no historical room-use assumption. Timing: event-driven with one-minute route-state summaries and native event times. Aggregate to route segment, zone and broad flow band; no person or credential tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: door or lock state does not prove passability, counters do not show who remains, and smoke or hazard conditions may change between sensors.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, fire-safety lead, building manager, security control room, accessibility lead and competent hazard owner. Precedence: current incident command and emergency services, then the current approved plan or direction and current command route direction, approved evacuation or shelter plan and owner-confirmed closures; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and route calculation; any recommendation is an authorised-option comparison, not an instruction. Decision interval: on activation and after any route, hazard, door, lift or cordon change. Minimum evidence: current route network, verified segment states, authorised destination, current incident-zone designation and at least one source for each material constraint. Method: exclude blocked, restricted or unknown segments, calculate remaining options and display evidence age and assumptions for each. Uncertainty: unsensed obstruction, crowd behaviour and rapidly changing conditions make route viability provisional. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not direct movement, declare a route safe, unlock doors, infer individual mobility, or select a route contrary to command or the current plan. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can give command a current set of movement options and identify which route facts still require competent confirmation.

EC-032

STAKEHOLDER QUESTION

Which designated exits are confirmed open, closed, locked, obstructed, unavailable or not yet checked?

SENSORS AND TELEMETRY

Proposed only: monitored final-exit door contacts, access-controller lock and power state, emergency-exit hardware monitoring where commissioned, local power status and authorised inspection reports. Coverage: all current designated exits and the approach segment immediately serving each exit. Timing: event-driven with a one-minute exit table; manual verification time retained separately. Aggregate to exit and zone state; no credential or person-level event display. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: an open contact does not prove a clear approach, a locked-state bit may not reflect mechanical release, and unmonitored exits remain unknown.

AUTHORITATIVE SUPPORTING DATA

Owners: fire-safety lead, building manager, security control room, estates engineering, incident commander and authorised wardens or inspectors. Precedence: current incident command and emergency services, then the current approved plan or direction and current command direction, approved exit designation and competent manual confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and comparison, not safety certification. Decision interval: at activation, on every exit-state change and before any route option is briefed. Minimum evidence: current exit register, verified mapping, current controller or contact state, power and override status, and manual confirmation for any critical ambiguity. Method: separate monitored state, commanded state, manual report and unknown approach condition; never collapse them into a single 'available' flag. Uncertainty: sensor failure, mechanical damage and local obstruction can make digital status misleading. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not remotely unlock or control doors, certify an exit as safe, infer clearance from a contact state, or override fire or security controls. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can direct a physical check to the exits that are unknown or contradictory and keep them out of the trusted option set meanwhile.

EC-033

STAKEHOLDER QUESTION

Which route segments have confirmed hazards, reported problems, degraded conditions or insufficient evidence?

SENSORS AND TELEMETRY

Proposed only: incident-relevant smoke or heat alarms, calibrated fixed gas points, water-depth or leak sensors, local lighting and power state, door events, authorised obstruction reports and responder observations. Coverage: current route segments and adjacent verified sensor coverage. Timing: event-driven with hazard-appropriate samples aggregated to one minute and reports recorded at observation time. Aggregate to segment and zone condition; no person-level movement data. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: fixed sensors are local, lighting power does not prove visibility, and absence of an alarm cannot clear an unsensed segment.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, competent hazard owner, fire-safety lead, estates engineering, building manager and responder liaison. Precedence: current incident command and emergency services, then the current approved plan or direction and current command restriction and competent professional or responder assessment; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and spatial comparison; no causal diagnosis or safety recommendation. Decision interval: on each new alarm, observation or route assessment. Minimum evidence: current route map, verified sensor or report location, recent observation and explicit coverage or blind-spot statement. Method: attach each condition to the smallest supported segment, classify observed, reported, estimated or unknown, and retain detection limits. Uncertainty: hazard movement, sensor lag, cross-sensitivity and stale reports can change conditions quickly. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare a segment safe or unsafe beyond the evidence, infer exposure, calculate personal risk, or issue movement instructions. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can mark unsafe or uncertain segments, request verification and prevent an apparently shortest route from being treated as usable.

EC-034

STAKEHOLDER QUESTION

Which approved shelter-in-place areas remain credible, and which life-safety or service dependencies are unverified?

SENSORS AND TELEMETRY

Proposed only: current shelter-area register, door and damper states, BMS ventilation and smoke-control status, local power and communication health, calibrated incident-relevant environmental points and authorised inspection reports. Coverage: designated shelter areas and their verified ventilation, access, communication and service dependencies. Timing: on activation and every material building-system or hazard change; one-minute service summaries. Aggregate to area and dependency state; no occupancy or individual-needs inference. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a closed door or ventilation state does not prove protection, environmental sensors are local, and room function may have changed.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, fire-safety or hazard specialist, building manager, estates engineering, accessibility lead and communications lead. Precedence: current incident command and emergency services, then the current approved plan or direction and the current approved plan, command decision and competent professional judgement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and prerequisite comparison; recommendation is limited to presenting documented options for authoritative consideration. Decision interval: at every shelter assessment and after any hazard, ventilation, access or communications change. Minimum evidence: current shelter designation, hazard-specific prerequisites, verified system states, current area-use confirmation and communication availability. Method: evaluate each prerequisite separately, show observed versus owner-confirmed states and exclude any area with a critical unknown unless command directs otherwise. Uncertainty: building changes, hidden leakage paths and sensor blind spots prevent certification of suitability. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare an area safe, direct people to shelter, infer who can use it, or treat the May 2021 floor plan as proof of current function or protection. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can show whether an authorised shelter option still meets its prerequisites and which dependency could invalidate it.

EC-035

STAKEHOLDER QUESTION

Which assembly areas are currently usable and supportable, and what capacity, access or welfare constraints must be stated?

SENSORS AND TELEMETRY

Proposed only: local weather-station measurements, surface-water or flood alerts, lighting and power status, approved route and closure records, anonymous area-count bands where deployed and authorised inspection reports. Coverage: designated assembly areas, approaches and essential services. Timing: weather at one- to five-minute samples, route and lighting events as generated, and five-minute occupancy bands. Aggregate to area, route and capacity band; no identification or accountability from counters. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: local weather may not represent every area, counters cannot determine who is present, and planned capacity may not reflect temporary obstructions.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, building or campus manager, security control room, accessibility lead, estates engineering and welfare lead. Precedence: current incident command and emergency services, then the current approved plan or direction and current command designation, approved assembly plan and owner-confirmed area condition; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and capacity estimate, not safety certification or muster accounting. Decision interval: at activation and after any weather, route, lighting, cordon or crowding change. Minimum evidence: current area designation and capacity basis, verified route status, current environmental or inspection evidence and known restrictions. Method: compare demand bands with documented capacity and constraints, show uncertainty and offer only authorised alternative areas for assessment. Uncertainty: weather variation, crowd movement and unrecorded barriers make capacity and access estimates approximate. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare an area safe, conduct individual accountability, direct relocation, infer medical or accessibility needs, or promise available capacity. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can select assembly options for command consideration with explicit capacity, access, welfare and communications constraints.

EC-036

STAKEHOLDER QUESTION

Which cordon lines and controlled access points are currently authorised, and where is the boundary or signage uncertain?

SENSORS AND TELEMETRY

Proposed only: the command-approved incident map, digital closure records, access-controller zone status, portable barrier inventory and authorised field reports from cordon points. Coverage: the current authorised boundary and its access points, not inferred extensions. Timing: on every command boundary change and field confirmation; five-minute time-stamped consolidated map. Aggregate to boundary segment and access-point status; no tracking of entrants or responders. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: barrier inventory does not prove deployment, access-controller zones may not match the physical cordon, and field reports can lag.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, security or police liaison, building manager, control-room operator and mapping owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the latest explicit command or emergency-service cordon direction; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: authoritative lookup and map comparison, not hazard-based cordon generation. Decision interval: on issue, amendment and before each agency or public briefing. Minimum evidence: a current authorised boundary, effective time, mapped control points and at least one owner confirmation for each material change. Method: display commanded boundary, field-confirmed segments and uncertain gaps separately; retain superseded versions for traceability. Uncertainty: mapping ambiguity, terminology mismatch and delayed field confirmation can misplace a boundary. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not create, expand, reduce or enforce a cordon, control access, identify entrants, or infer a boundary from sensor readings alone. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can keep maps, signs and access-control briefings aligned with the cordon actually authorised by command.

EC-037

STAKEHOLDER QUESTION

Which responder access, egress, rendezvous and key-handover arrangements are confirmed for the next arrival?

SENSORS AND TELEMETRY

Proposed only: gate and door states, lift and loading-bay status, road or path closure records, local lighting and power, access-pack inventory, current incident zones and authorised field reports. Coverage: approved responder approaches, receiving points, internal access routes and egress alternatives. Timing: event-driven with one-minute route summaries and immediate updates on command or closure changes. Aggregate to route, gate, asset and receiving-point state; no vehicle or responder tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: door state does not prove route clearance, external traffic can change rapidly, and access packs may be missing despite inventory records.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency-service liaison, security control room, building manager, estates engineering and responding agency. Precedence: current incident command and emergency services, then the current approved plan or direction and responding-agency requirements and current command-approved access plan; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and route comparison, not dispatch or navigation control. Decision interval: before agency arrival and after any route, gate, lift or cordon change. Minimum evidence: current receiving point, authorised route, current gate and internal access states, known restrictions and liaison confirmation. Method: filter routes by vehicle or operational constraints supplied by the agency, show unknown segments and preserve alternatives. Uncertainty: external congestion, key availability and hidden obstruction can invalidate a route quickly. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not dispatch or navigate responders, remotely open access, disclose sensitive access details beyond operational need, or promise route availability. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare a reliable arrival path and liaison handoff for responders without exposing restricted access information more widely.

EC-038

STAKEHOLDER QUESTION

Where do privacy-preserving flow observations indicate congestion risk, and where is the evidence too weak or stale to use?

SENSORS AND TELEMETRY

Proposed only: commissioned overhead time-of-flight or bidirectional beam counters at selected exits, stairs and chokepoints, plus current door-state and route-closure events. Coverage: only instrumented chokepoints with verified direction and field of view; no continuous path linking. Timing: native counts aggregated to one-minute inflow, outflow and net-flow bands, with five-minute trend windows. Aggregate to anonymous low, medium, high or unknown flow bands; suppress exact small counts. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: counters double count, miss groups and reverse movement, and cannot show why flow changed or whether anyone remains.

AUTHORITATIVE SUPPORTING DATA

Owners: information-governance owner, building manager, fire-safety lead, security systems owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current command route direction and competent on-scene observation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation, calculation and short-window estimate, not individual tracking or crowd-behaviour diagnosis. Decision interval: every minute while authorised route planning uses the data. Minimum evidence: verified placement and direction, current calibration, clock alignment, at least 80 percent uptime in the decision window and current route mapping. Method: calculate directional bands and confidence from counter quality, compare with independent reports and mark unsensed routes unknown. Uncertainty: occlusion, tailgating, bidirectional movement and privacy suppression limit accuracy. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not identify people, estimate personal speed, conduct accountability, infer panic, or automatically reroute movement. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can request marshals or an authorised alternative where aggregate evidence suggests congestion, while refusing to overstate weak counts.

EC-039

STAKEHOLDER QUESTION

Which temporary closure, diversion or access change has not yet propagated consistently across maps, briefings and signs?

SENSORS AND TELEMETRY

Proposed only: permit and closure registers, event and works records, access-controller configuration changes, current barrier reports, route-map versions and message or briefing records. Coverage: all route segments and access points affected by temporary arrangements. Timing: on each permit, closure, configuration or briefing change, with immediate mismatch flags. Aggregate to route segment, change record and communication version; no person-level access history. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: configuration may change before documentation, physical barriers may move, and a completed permit does not prove restoration.

AUTHORITATIVE SUPPORTING DATA

Owners: building manager, permit issuer, security control room, fire-safety lead, communications lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current authorised closure or restoration record and field confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and consistency comparison, not route approval. Decision interval: before activation briefing and after every temporary-change update. Minimum evidence: current route map, active change records, controller configuration where relevant, field confirmation and current briefing or message version. Method: map each change to affected routes and communications, flag mismatches and keep planned, configured and observed states separate. Uncertainty: late records, unmapped barriers and manual changes can leave inconsistencies undetected. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not approve or remove a diversion, control access, infer physical passability from configuration, or overwrite an authorised route plan. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can update the controlled route picture and identify every operational artefact still showing an obsolete route.

EC-040

STAKEHOLDER QUESTION

Which route, shelter and assembly options should be put to command, with evidence, trade-offs, accessibility gaps and safe-failure conditions?

SENSORS AND TELEMETRY

Proposed only: the current authorised option set, verified route and exit states, incident-zone evidence, shelter and assembly prerequisites, accessibility records, aggregate flow bands and service dependencies. Coverage: only options already defined in current plans or explicitly introduced by authorised command or competent owners. Timing: on formal option assessment and every material condition change. Aggregate to option, prerequisite, constraint and evidence state; no person-level suitability scoring. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: the data can be incomplete or fast-changing, and competing hazards or accessibility needs cannot be reduced to one machine score.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, fire-safety or hazard specialist, building manager, accessibility lead, security control room and emergency-service liaison. Precedence: current incident command and emergency services, then the current approved plan or direction and current command, emergency-service advice and competent professional judgement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: transparent comparison and bounded recommendation of which authorised options merit command consideration; no command decision. Decision interval: at each route, shelter or assembly decision point and whenever a critical condition changes. Minimum evidence: at least two authorised options, or a documented single-option constraint; current hazard, route, accessibility, destination and service evidence; evidence age; and a competent owner for every critical prerequisite. Method: compare options against explicit pass/fail gates and stated trade-offs, show shared dependencies, accessibility gaps and disqualifying unknowns, and test sensitivity to changed assumptions; do not use a black-box score. Uncertainty: rapidly changing hazards, incomplete accessible-route evidence and individual circumstances can invalidate any apparent ranking. Safe failure: present no preferred option, name the missing evidence and route the decision to command and the relevant competent owners.

ANSWER BOUNDARY

Do not select or issue an emergency instruction, optimise for individuals, certify safety, conceal a critical unknown, or recommend an option outside authorised plans. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can place a transparent options table before command, including accessibility gaps, disqualifying unknowns and the point at which evidence support must stop.

EC-041

STAKEHOLDER QUESTION

Which current step-free or otherwise accessible route options are documented, verified and supportable for this incident?

SENSORS AND TELEMETRY

Proposed only: the current accessible-route register, lift-controller status, powered-door and access-control health, door-state events, route closures, local power and authorised accessibility inspections. Coverage: documented accessible route segments, lifts, powered doors and destinations. Timing: event-driven with a one-minute route state and inspection time retained separately. Aggregate to route and asset status; no inference about who needs or can use an option. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: asset status does not prove route usability, temporary gradients or obstructions may be unsensed, and individual suitability varies.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, building manager, lift maintainer, security systems owner, fire-safety lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current accessible-egress arrangements, competent accessibility judgement and command direction; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and prerequisite comparison, not personal route recommendation. Decision interval: at activation and after any lift, door, route or power change. Minimum evidence: current accessible-route record, verified asset mapping, current service states and a recent competent or field confirmation for critical segments. Method: evaluate every required segment and dependency, mark unsensed obstructions unknown and retain authorised alternatives. Uncertainty: temporary furniture, manual door force, lift recall mode and individual circumstances limit the conclusion. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer disability or mobility, generate a personal emergency plan, direct an individual, declare a route suitable for everyone, or operate lifts or doors. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can include verified accessible route options in the command brief and request checks where step-free continuity is uncertain.

EC-042

STAKEHOLDER QUESTION

Which refuge communication points and associated links are operational, degraded, failed or not verified, without inferring occupancy?

SENSORS AND TELEMETRY

Proposed only: refuge-communication unit self-tests, line and battery status, call-event state, mapped device location, local power and associated alarm or control-panel health. Coverage: all commissioned refuge communication points and their control interfaces. Timing: native events with a one-minute status view and last successful test time. Aggregate to device and zone status; do not expose call content or infer occupancy from an event. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: self-tests may not cover acoustics or handset condition, a call event does not identify need, and an idle device does not prove no one is waiting.

AUTHORITATIVE SUPPORTING DATA

Owners: fire-safety systems owner, security control room, accessibility lead, estates engineering and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved refuge procedure and competent system-owner confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and comparison with service requirements; diagnosis limited to explicit fault codes. Decision interval: at activation, on any call or fault, and every five minutes while a critical point is degraded. Minimum evidence: verified device location and mapping, current line and power state, recent self-test and current control-point availability. Method: classify available, degraded, failed or unknown, separate call state from device health, and list authorised fallback communication routes. Uncertainty: device mapping, local damage and network dependency can create false assurance. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not identify a caller, infer health or assistance needs, listen to or disclose content beyond authorised handling, or control the refuge response. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can arrange an authorised alternative communication method for an unverified refuge point without inferring that anyone is there.

EC-043

STAKEHOLDER QUESTION

Which relevant zones have only one effective warning modality, and what authorised compensating communication option is available?

SENSORS AND TELEMETRY

Proposed only: audible-alarm circuit status, visual-beacon loop status, PA zone self-tests, digital-signage health, text-message gateway status, induction-loop self-tests and accessible web publication status. Coverage: commissioned warning zones and approved digital audience groups. Timing: on activation and channel-state change, with a five-minute multimodal coverage view. Aggregate to zone and channel modality; no inference about individual sensory needs. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: circuit status does not prove audibility or visibility at every position, and digital delivery does not prove access or comprehension.

AUTHORITATIVE SUPPORTING DATA

Owners: fire-safety systems owner, communications lead, accessibility lead, IT operations and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved warning strategy, expert accessibility assessment and command-authorised message; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and modality-gap comparison, not individual suitability assessment. Decision interval: before each warning and whenever a modality or shared dependency changes. Minimum evidence: current zone mapping, the warning strategy's required modality combination, current health or test evidence and an authorised compensating option. Method: classify each modality by zone as confirmed, degraded, failed, untested or not provided; identify zones with only one credible modality and expose shared power, network or controller dependencies. Uncertainty: circuit status does not prove effective audibility or visibility, and environmental conditions can change coverage. Safe failure: mark the zone as not adequately evidenced, name the missing modality or test and route the compensating decision to command, communications and accessibility owners.

ANSWER BOUNDARY

Do not infer who can hear, see or understand; certify warning coverage; personalise channels from tracked data; or trigger any warning system. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can identify zones lacking complementary warning coverage and request an authorised compensating communication measure.

EC-044

STAKEHOLDER QUESTION

Which evacuation or assistance equipment is recorded as present, in date and serviceable, and what still needs a competent physical check?

SENSORS AND TELEMETRY

Proposed only: asset tags or barcode scans, cabinet door or presence contacts, weight sensors where appropriate, battery telemetry and controlled inspection and maintenance records for evacuation chairs, communication aids and related equipment. Coverage: designated equipment stores and assets by current mapped location. Timing: on inventory movement, inspection, battery change or cabinet event; daily or owner-defined heartbeat for powered devices. Aggregate to asset type, location and status; no association with a named user. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: presence does not prove serviceability, weight can be ambiguous, maintenance can become outdated after use, and suitability is individual and task-specific.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, equipment owner, facilities maintenance, fire-safety lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current inspection and competent equipment-owner confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and comparison with inspection and readiness requirements. Decision interval: at activation, before authorised deployment and after use. Minimum evidence: asset identity and location, current inspection date, maintenance or battery state, no unresolved fault and an authorised competent check where required. Method: separate recorded presence, recent inspection, powered health and competent confirmation; mark moved or unverified assets unknown. Uncertainty: unlogged movement, post-inspection damage and sensor ambiguity can overstate readiness. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not allocate equipment to a person, infer who needs it, certify suitability or serviceability, or dispatch or operate it. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can request a competent inspection or replacement for equipment whose location, inspection or condition evidence is insufficient.

EC-045

STAKEHOLDER QUESTION

Which trained assistance functions are on duty, acknowledged and backed up for the next operational period?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the authorised duty roster, training-validity register, role acknowledgements, backup assignments and control-room function sign-in. Coverage: trained assistance functions and duty periods, not personal location or recipient lists. Timing: on roster, training or acknowledgement change, with a ten-minute freshness target during activation. Aggregate to function coverage and training-validity state; disclose names only to authorised command where operationally necessary. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: training records do not prove current capability or availability, and informal cover may not be recorded.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, training owner, emergency planning lead, functional managers and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current authorised roster, training owner and functional lead confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: current command, accessibility coordination, training owners and relevant functional leads. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and comparison of required, valid, acknowledged and backup function coverage. Decision interval: at activation and whenever a function or training status changes. Minimum evidence: current required-function list, authorised assignment, training-validity record and acknowledgement or direct owner confirmation. Method: classify covered, covered with caveat, gap, conflict or unknown; keep individual recipient information outside the service. Uncertainty: late records, role-name mismatch and absence from the system can create false gaps. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer who needs assistance, create pairings, appoint staff, expose training or personal data unnecessarily, or claim that roster coverage guarantees delivery. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can secure functional coverage and backup without compiling or exposing a list of people who may require assistance.

EC-046

STAKEHOLDER QUESTION

Which assembly or welfare areas currently offer accessible approaches, facilities, seating and communication options?

SENSORS AND TELEMETRY

Proposed only: current accessibility inspection records, route and lift status, powered-door health, local lighting and power, accessible toilet service status, weather or surface-condition measurements and communication-channel health. Coverage: designated assembly and welfare areas and their approaches and facilities. Timing: at activation and every material route, facility, weather or communications change. Aggregate to area, route and facility state; no individual-needs inference. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a service-status bit does not prove usability, temporary surface conditions may be local, and accessibility varies by person and situation.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, welfare lead, building or campus manager, estates engineering, communications lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current competent accessibility assessment, approved area plan and command designation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and prerequisite comparison, not personal suitability recommendation. Decision interval: before an area is presented as an option and after any relevant condition changes. Minimum evidence: current area designation, recent accessibility inspection, verified route and facility states, current communication option and known temporary constraints. Method: show each prerequisite separately and identify the competent owner or manual check needed for unknown conditions. Uncertainty: unrecorded barriers, environmental change and individual circumstances limit general claims. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not declare an area accessible or safe for everyone, infer needs, allocate individuals, or override command area selection. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can select supportable welfare or assembly options and state which accessibility features are confirmed, limited or unknown.

EC-047

STAKEHOLDER QUESTION

Which approved low-stimulation, quiet, plain-language or reduced-information alternatives are available and operationally feasible?

SENSORS AND TELEMETRY

Proposed only: the current inclusive-arrangements register, room or area availability, measured sound level and lighting where commissioned, route and door status, communication-channel health and authorised inspection reports. Coverage: only areas already approved for an inclusive emergency function and their access routes. Timing: on activation, area-status change and at five-minute environmental summaries where sensors exist. Aggregate to area and condition bands; no inference about who would benefit or personal behaviour. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: sound and light readings are point measurements, normal room booking does not prove availability, and individual responses vary.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, welfare lead, building manager, communications lead and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved inclusive arrangements and competent accessibility or welfare judgement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and option comparison, not diagnosis or personal recommendation. Decision interval: when command assesses inclusive alternatives and after any area or route change. Minimum evidence: an approved alternative, current area-use confirmation, accessible route evidence, communication method and any relevant environmental observation. Method: present available, constrained and unknown options with source age; avoid ranking people or predicting individual response. Uncertainty: temporary noise, crowding, lighting and route conditions may differ from sensor locations. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer cognitive, sensory or mental-health needs, direct an individual, promise a quiet environment, or designate a new area without authority. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can offer command approved alternatives that reduce avoidable sensory or information barriers without making personal suitability decisions.

EC-048

STAKEHOLDER QUESTION

Which assistance-request channels are working, accessible and routed to an acknowledged authorised function?

SENSORS AND TELEMETRY

Proposed only: refuge-call status, emergency SMS or web endpoint health, accessible helpdesk or control-room phone status, induction-loop or text-relay availability and routing-queue telemetry. Coverage: approved assistance-request channels and their authorised receiving functions. Timing: continuous endpoint health, event-driven request status and a one-minute queue summary during activation. Aggregate to channel and queue state; minimise request content and never expose identity beyond authorised case handling. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: endpoint health does not prove a request will be handled promptly, queue counts can hide urgency, and channel use does not reveal the nature of need.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, security control room, communications owner, information-governance owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved assistance procedure and receiving-function confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and routing comparison, not need inference or triage diagnosis. Decision interval: at activation, on every channel fault and when an authorised request remains unacknowledged beyond its procedure-defined interval. Minimum evidence: current endpoint health, verified routing, authorised receiving function, timestamped request state and approved fallback. Method: classify available, degraded, failed or unknown; compare request submission and authorised acknowledgement without analysing sensitive content. Uncertainty: routing delay, external carrier failure and incomplete acknowledgements can obscure true service status. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer the requester's health or needs, prioritise people automatically, disclose sensitive content, respond with medical advice, or dispatch assistance. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can restore or reroute an assistance-request channel and verify that an authorised function has acknowledged responsibility.

EC-049

STAKEHOLDER QUESTION

Which translated, captioned, text, symbol or easy-read materials match the current authorised base message?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the controlled content repository, translation and accessibility assessment metadata, message hashes, caption and transcript files, channel-format validation and publication records. Coverage: all approved alternative-language and accessible versions of the active message set. Timing: on base-message approval, every authorised content change and each channel publication. Aggregate to language or format and message version; no inference about audience nationality, literacy or disability. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: automated checks cannot confirm meaning, translations can lag the authorised base message, and emergency terminology may need specialist assessment.

AUTHORITATIVE SUPPORTING DATA

Owners: communications lead, accessibility lead, approved translation owner, message approver and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and the current command-approved base message and approved human-approved alternative version; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and version comparison, not automatic translation or content recommendation. Decision interval: before publication and after any base-message correction. Minimum evidence: the approved base identifier, approved alternative version, assessor and effective time, plus channel-format compatibility. Method: compare controlled identifiers and mandatory meaning segments, flag out-of-date or missing alternatives and preserve assessor provenance. Uncertainty: semantic equivalence cannot be proven by hash or machine comparison alone. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not auto-translate or simplify live emergency instructions without approval, infer who needs a language, certify equivalence, or publish content. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can publish only accessible variants that are version-aligned with the authorised base message and hold outdated variants back.

EC-050

STAKEHOLDER QUESTION

Which inclusive arrangements are verified, partly verified, failed or not assessed for this incident or exercise?

SENSORS AND TELEMETRY

Proposed only: current accessibility assessments, channel self-tests, equipment inspection records, route and lift status, trained-function coverage, approved observer reports and exercise or incident logs. Coverage: the inclusive arrangements explicitly required by the current plan or exercise objectives. Timing: during activation or exercise execution, with a formal evidence snapshot at each assessment point. Aggregate to arrangement and evidence state; no individual outcome or performance scoring. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: not all arrangements can be safely tested, records can confuse nominal provision with actual availability, and observer coverage is selective.

AUTHORITATIVE SUPPORTING DATA

Owners: accessibility lead, emergency planning lead, exercise director or incident commander, equipment and channel owners and information-governance owner. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved plan, exercise control and competent accessibility judgement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and assurance-boundary assessment, not certification. Decision interval: at each incident or exercise assessment and before lessons are agreed. Minimum evidence: the required-arrangement list, current evidence for each, source-health status and explicit record of what was not tested or observed. Method: classify verified, partially verified, failed, not assessed or not applicable with justification and separate system evidence from observer judgement. Uncertainty: selective observation and ethical or safety constraints can leave important gaps. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer individual needs or outcomes, rate people, create personal plans, claim compliance, or treat untested provision as verified. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can direct corrective action to a specific inclusive arrangement and report untested provision honestly rather than as assurance.

EC-051

STAKEHOLDER QUESTION

Which emergency coordination resources are at each designated location, and which are inspected, usable, restricted or unverified?

SENSORS AND TELEMETRY

Proposed only: asset tags or barcode scans, cabinet presence or door contacts, weight sensors for suitable consumables, battery telemetry, checkout records and controlled inspection or maintenance records for radios, torches, signage, first-aid and coordination kits. Coverage: designated stores, incident rooms, assembly points and responder receiving locations. Timing: on movement, cabinet event, inspection or battery change, with daily or owner-defined health summaries. Aggregate to asset or stock type and location; no association with individual users. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: presence does not prove usability, weight can be ambiguous, unlogged movement is common and inspection status can change after use.

AUTHORITATIVE SUPPORTING DATA

Owners: emergency planning lead, facilities or stores owner, security control room, equipment maintainer and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current controlled inventory, inspection record and competent owner confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and comparison with minimum resource requirements. Decision interval: at activation, before issue and after significant use or relocation. Minimum evidence: asset identity and current location, recent inspection or maintenance, battery or consumable state and no unresolved fault. Method: separate present, inspected, powered, issued, depleted and unknown states and flag resources whose location or serviceability is unverified. Uncertainty: inventory drift, sensor ambiguity and post-inspection damage can create false readiness. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not certify serviceability, issue or allocate equipment, infer who used it, or promise availability from an inventory record. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can deploy or reserve only resources with credible location and condition evidence and commission checks for the rest.

EC-052

STAKEHOLDER QUESTION

How much verified power and communications endurance remains for critical coordination equipment, and what is only estimated?

SENSORS AND TELEMETRY

Proposed only: UPS load and battery state, radio and torch charger telemetry, battery voltage or health where supported, generator status, device power mode and recent runtime-test records. Coverage: critical incident-room, communications, warning and refuge equipment and their power dependencies. Timing: native power samples aggregated to one minute during activation and test records by completion time. Aggregate to asset and service runtime ranges; no device-user tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: battery state-of-charge can be inaccurate, ageing and temperature affect capacity, and actual incident load may differ from tests.

AUTHORITATIVE SUPPORTING DATA

Owners: estates engineering, IT and telecoms owners, fire-safety systems owner, equipment maintainer and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current competent owner status, approved power-fallback procedure and validated runtime tests; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation, calculation and estimate; forecast must be labelled and never treated as guaranteed endurance. Decision interval: at activation, on load or power-source change and every ten minutes while operating on reserve. Minimum evidence: current load, battery or fuel state, recent health or runtime evidence, verified dependency mapping and model assumptions. Method: calculate a conservative runtime range using owner-approved parameters, show sensitivity to load and exclude devices with stale or invalid battery data. Uncertainty: battery-model error, hidden loads and environmental conditions can materially shorten runtime. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not promise endurance, start generators or switch power, diagnose battery condition beyond supported data, or delay fallback action because of an estimate. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can schedule battery changes, charging, generator support or communications fallback before a critical capability reaches its reserve.

EC-053

STAKEHOLDER QUESTION

What safe-use capacity evidence exists for each authorised assembly area, and what aggregate occupancy band can be stated?

SENSORS AND TELEMETRY

Proposed only: current planned capacity, privacy-preserving overhead or beam counters at approved entry points, manual warden aggregate reports, route status, lighting and weather or surface-condition measurements. Coverage: authorised assembly areas and their monitored entry points and supporting routes. Timing: counter data aggregated to five-minute bands; manual reports at observation time and environmental data at one- to five-minute intervals. Aggregate to low, medium, high or near-planned-capacity bands; no individual roll call or identity. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: counters miss and double count, people can enter outside monitored points, planned capacity may not reflect temporary conditions, and movement continues.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, assembly-area lead, building or campus manager, information-governance owner and security control room. Precedence: current incident command and emergency services, then the current approved plan or direction and current command designation and the authorised manual accountability procedure; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: observation and capacity estimate, not exact headcount or safety certification. Decision interval: every five minutes while the estimate is operationally useful and after a route or area change. Minimum evidence: current area capacity basis, verified counter placement and calibration, clock alignment, current route and condition evidence and at least one manual aggregate check. Method: combine only disclosure-safe aggregate bands, show counter error and unmonitored access, and keep accountability returns separate. Uncertainty: unmonitored movement, sensor occlusion and changing usable area can make the band wrong. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not identify individuals, conduct accountability, infer vulnerability, declare an area safe or full, or direct movement. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can manage assembly-area support at a safe aggregate level while keeping roll call and individual accountability with authorised procedures.

EC-054

STAKEHOLDER QUESTION

Which welfare supplies and facilities are available, low, depleted, restricted or unverified, without inferring personal needs?

SENSORS AND TELEMETRY

Proposed only: barcode or stock transactions, cabinet seals or presence contacts, suitable weight sensors, water or consumable inventory, accessible toilet and power status, temperature in designated welfare stores and authorised manual checks. Coverage: approved welfare stores and facilities supporting the incident. Timing: on stock movement, seal break, facility fault or manual check; five- or fifteen-minute summaries during sustained use. Aggregate to stock type, facility and broad quantity band; no recipient records. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: inventory can lag, weight is affected by packaging, facility status does not prove usability and demand is uncertain.

AUTHORITATIVE SUPPORTING DATA

Owners: welfare lead, facilities or stores owner, accessibility lead, occupational health or first-aid service owner and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current welfare procedure, stock-owner confirmation and competent health or welfare advice; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and consumption estimate, not medical triage or personal recommendation. Decision interval: at activation, after significant issue and at welfare-lead-defined assessment intervals. Minimum evidence: current stock and facility register, recent verification, transaction history and owner-defined minimum levels. Method: show available, restricted, depleted and unknown bands, calculate recent consumption separately and avoid forecasting without sufficient history. Uncertainty: unlogged issue, spoilage and changing demand limit the estimate. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer health, disability, medication or personal need; allocate supplies to individuals; give medical advice; or certify facility suitability. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can request replenishment or relocate a welfare function without turning aggregate supply data into assumptions about personal needs.

EC-055

STAKEHOLDER QUESTION

Is the authorised responder reception and staging point ready for arrivals, briefings, access and liaison?

SENSORS AND TELEMETRY

Proposed only: access-pack and key inventory, current plan and hazard-information pack versions, radio and charging status, local power and lighting, gate or door states, printer availability and authorised field confirmation. Coverage: the current responder receiving point, staging area and directly supporting access route. Timing: before expected arrival and after any receiving-point, route or resource change. Aggregate to resource and location state; protect sensitive access and hazard details. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: inventory does not prove the item is at hand, printed plans can be obsolete, and a clear gate does not prove the route beyond it.

AUTHORITATIVE SUPPORTING DATA

Owners: emergency-service liaison, security control room, building manager, emergency planning lead, hazard owners and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and responding-agency request and current command-approved receiving arrangement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and requirement comparison, not dispatch control. Decision interval: on agency notification, before estimated arrival and at handover. Minimum evidence: authorised receiving point, agency-stated needs, current access state, current controlled information pack and verified communication method. Method: compare required and available resources, distinguish prepared, missing, outdated and unknown, and restrict sensitive details to need-to-know. Uncertainty: arrival changes, route disruption and unlogged resource movement can invalidate the readiness view. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not dispatch responders, disclose sensitive access material publicly, remotely open access, or promise that staging needs are met. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare a controlled reception point that supports responder arrival, briefing, access and agency liaison.

EC-056

STAKEHOLDER QUESTION

Which resources are allocated to each coordination function, and where do shortages or shared dependencies create a single point of failure?

SENSORS AND TELEMETRY

Proposed only: current function requirements, resource inventory and inspection state, power and network dependencies, duty-role coverage and authorised issue or reservation records. Coverage: required functions, shared resources and critical dependencies across the incident. Timing: on activation, resource issue, fault, role change or new agency request. Aggregate to function and resource class; no allocation to named individuals by the service. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: one resource can serve only one place at a time, inventory may be stale, and apparent alternatives can share the same failed dependency.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency coordination lead, resource owners, functional leads and estates or IT dependency owners. Precedence: current incident command and emergency services, then the current approved plan or direction and current command priorities and functional lead confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and constrained allocation recommendation for authoritative assessment, not automatic assignment. Decision interval: at each resource checkpoint and when a critical shortage or dependency changes. Minimum evidence: current required functions, verified resource availability and serviceability, dependency status, owner and any reservation or issue constraint. Method: construct a transparent requirement-to-resource matrix, identify conflicts and shared dependencies, and show alternative classes without assigning people. Uncertainty: unrecorded movement, differing competence requirements and hidden dependencies limit feasibility. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not allocate or dispatch resources, assign staff, infer competence, override command priority, or promise that an alternative is equivalent. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can reallocate or request backup resources where one shared dependency threatens several coordination functions.

EC-057

STAKEHOLDER QUESTION

Which authorised accountability sources have reported, which are outstanding, and what uncertainty remains without treating sensor counts as roll call?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use authorised warden or area-return status, visitor and contractor register status, event-owner aggregate returns, assembly-point report timestamps and approved accountability workflow logs. Coverage: accountability functions and defined population groups, not individual location histories. Timing: on each authorised return or correction, with a five-minute coverage summary. Aggregate to group or area return status; personal names remain only within the authorised accountability procedure. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: registers can be outdated, people may move between groups, a submitted return can contain errors, and anonymous counters cannot reconcile individuals.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, accountability lead, wardens or area leads, visitor and contractor register owners and information-governance owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the current approved accountability procedure and authorised human confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: incident command, authorised accountability roles and information-governance-approved register owners. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and coverage comparison, not identity matching, headcount inference or tracking. Decision interval: during accountability updates and before each command report. Minimum evidence: current group definitions, authorised return status and time, known register coverage and explicit outstanding or exception categories. Method: show reported, outstanding, conflicting and not applicable groups, preserve correction history and keep anonymous occupancy estimates separate. Uncertainty: late returns, duplicate group membership and stale registers create residual uncertainty. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not identify or locate individuals, reconcile people from access or wireless data, declare an area clear, publish personal status, or replace manual accountability. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can chase outstanding authorised reports and state residual uncertainty without treating building telemetry as evidence that everyone is accounted for.

EC-058

STAKEHOLDER QUESTION

Which critical resources may fall below their operating reserve during the next operational period, and how uncertain is that forecast?

SENSORS AND TELEMETRY

Proposed only: inventory transactions, suitable stock-level or weight telemetry, battery and fuel state, request and issue logs, resupply confirmations and current consumption rates. Coverage: resources whose depletion would affect coordination, communications, welfare or responder support. Timing: event-driven with an assessment interval set to the resource, normally ten to thirty minutes during sustained use. Aggregate to resource class, location and conservative depletion range; no user-level consumption profile. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: consumption can be irregular, stock telemetry can drift, resupply times can change and future demand is not observed.

AUTHORITATIVE SUPPORTING DATA

Owners: resource owner, welfare or communications lead, estates engineering, supplier or agency liaison and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current owner-confirmed stock and authorised resupply information; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: calculation and forecast, explicitly separate from observation and confirmed delivery. Decision interval: at each operational-period checkpoint and after a material issue or resupply change. Minimum evidence: verified current stock, recent consumption history, known minimum operating level, current requests and at least one owner-confirmed resupply status. Method: use conservative scenario ranges rather than a single exhaustion time, show assumptions and suppress a forecast where history is insufficient. Uncertainty: demand spikes, stock-record error and delayed resupply can invalidate the range. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not promise availability or delivery, ration or allocate stock, treat a forecast as a measured fact, or delay escalation because the central estimate appears adequate. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can start authorised replenishment or conservation planning early and show command the assumptions behind the forecast.

EC-059

STAKEHOLDER QUESTION

What external support or replenishment is confirmed, requested, estimated or unknown, and what could delay arrival?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use authorised agency or supplier status messages, request and purchase or mutual-aid records, receiving-point readiness, route or cordon status and permitted fleet ETA feeds supplied by the responding organisation. Coverage: the specific support request, provider, receiving point and approved access route. Timing: on request, acknowledgement, dispatch, ETA update and arrival confirmation. Aggregate to request and provider status; no vehicle, driver or responder tracking beyond permitted provider-supplied operational status. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: provider ETAs can change, acknowledgement is not dispatch, route conditions may be outside building coverage and local systems cannot confirm external movement.

AUTHORITATIVE SUPPORTING DATA

Owners: agency liaison, supplier or procurement owner, incident commander, security control room and receiving-point lead. Precedence: current incident command and emergency services, then the current approved plan or direction and the provider's authorised update and current command request priority; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and ETA estimate; confirmed, provider-estimated and locally calculated times must remain distinct. Decision interval: at every status update and before the next operational-period plan. Minimum evidence: a recorded request, authorised provider, current acknowledgement or dispatch state, receiving-point readiness and time-stamped source. Method: show requested, accepted, dispatched, estimated, arrived or unknown; calculate no ETA unless the provider supplies sufficient current evidence. Uncertainty: external traffic, provider priorities and missing status updates make arrival uncertain. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not dispatch or direct external resources, track individuals, promise arrival, infer provider capacity, or present a local estimate as provider confirmation. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can brief command on confirmed external support, expose arrival dependencies and avoid planning around an unverified estimate.

EC-060

STAKEHOLDER QUESTION

Which issued resources are returned, transferred, damaged, depleted or missing a complete custody record at demobilisation?

SENSORS AND TELEMETRY

Proposed only: barcode or asset-tag scans, controlled checkout and transfer logs, cabinet return events, battery and maintenance status, consumable issue records and authorised loss or damage reports. Coverage: incident resources and designated stores, handover points and responsible functions. Timing: on each issue, transfer, return or damage report and at incident or shift handover. Aggregate to asset or resource class and accountable function; avoid individual blame or unnecessary personal data. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: scans can be missed, an asset can be returned but unserviceable, and consumables may not have item-level tracking.

AUTHORITATIVE SUPPORTING DATA

Owners: resource owner, stores or facilities lead, security control room, records manager and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and the controlled issue record and responsible owner confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and chain-of-custody reconciliation, not misconduct diagnosis. Decision interval: at each handover and before incident resource closeout. Minimum evidence: unique asset or stock reference, authorised issue or transfer event, receiving function, return or disposition status and any inspection requirement. Method: reconcile expected and observed transitions, retain unmatched events and separate missing, damaged, depleted and pending inspection. Uncertainty: manual handovers, shared kits and delayed scanning create gaps. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer theft or blame, identify a user beyond authorised records, mark an asset serviceable from return alone, or alter custody records. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can close the resource record, resolve custody gaps and identify equipment needing inspection, replacement or investigation.

EC-061

STAKEHOLDER QUESTION

What is the current command and coordination structure, and which authority boundaries or delegated functions remain unresolved?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the current command declaration, role and delegation records, duty acknowledgements, incident-log entries and authorised agency liaison confirmations. Coverage: command and coordination functions, operational period and decision scope; no continuous personal location. Timing: on declaration, transfer, delegation or role change, with immediate versioning. Aggregate to function, authority scope and confirmation state; names only where operationally necessary and permitted. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: parallel logs can conflict, a role title may not imply authority and an acknowledgement does not prove availability.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, institutional emergency lead, responding emergency services, agency liaison and governance owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the latest explicit command declaration and emergency-service authority; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: current command, authorised institutional and agency liaison functions and governance owners. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: authoritative lookup and comparison, not authority inference or appointment. Decision interval: at activation, every command transfer and before each formal briefing. Minimum evidence: current command record, effective time, authority scope, confirmed role holders or functions and unresolved delegation conflicts. Method: display confirmed, delegated, pending and conflicting authority states and preserve superseded command versions. Uncertainty: delayed records and differing agency terminology can create ambiguity. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not create, transfer or interpret authority beyond the record, appoint people, expose unnecessary personal data, or continue using a superseded command structure. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can brief all functions against one current authority structure and escalate unresolved overlaps or gaps to command.

EC-062

STAKEHOLDER QUESTION

Which agencies and institutional functions have been notified, acknowledged, declined, escalated or not yet confirmed?

SENSORS AND TELEMETRY

Proposed only: authorised call and message logs, emergency notification gateway status, radio logs, agency acknowledgement records and incident-log entries. Coverage: the current notification matrix and explicitly authorised recipients. Timing: on each notification attempt, acknowledgement or escalation, with one-minute consolidation. Aggregate to agency or function and notification state; minimise personal contact details. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: channel delivery is not acceptance, verbal calls may be incompletely logged and third-party acknowledgements can use different identifiers.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, agency liaison, communications lead, security control room and each notified function owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the current command notification decision and the receiving agency's confirmed response; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and notification-matrix comparison, not dispatch or response prediction. Decision interval: at activation and before each situation report or escalation assessment. Minimum evidence: current required-notification list, authorised contact route, timestamped attempt and acknowledgement or explicit unresolved state. Method: classify required, attempted, delivered, acknowledged, declined, escalated or unknown and preserve retries and fallback channels. Uncertainty: clock mismatch, shared mailboxes and informal verbal confirmation can reduce certainty. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not contact or dispatch agencies automatically, infer acceptance from delivery, disclose sensitive contacts, or promise a response. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can focus liaison effort on unconfirmed parties and avoid describing notification as acknowledgement or attendance.

EC-063

STAKEHOLDER QUESTION

Which facts, maps and status indicators make up the current common operating picture, and where do sources disagree?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use current command facts, agency situation updates, institutional incident logs, verified asset and zone states, approved maps, source-health metadata and evidence snapshots. Coverage: the incident, authorised operational area, critical dependencies and agency information-sharing scope. Timing: on every authoritative update and before each joint briefing; retain native and retrieval times. Aggregate to claim, zone, asset and source; apply data minimisation and agency-specific permissions. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: different agencies can use different boundaries, time windows and terminology, and duplicated reports can look independent.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, emergency-service commanders, agency liaison, mapping owner, competent system owners and information-governance leads. Precedence: current incident command and emergency services, then the current approved plan or direction and current multi-agency command decisions and the competent owner of each disputed fact; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: current command, authorised agency liaison, relevant competent owners and information-governance-approved recipients. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and evidence synthesis, not automated consensus or command recommendation. Decision interval: before every joint situation report and after a material conflicting update. Minimum evidence: attributable sources, current command state, aligned time and spatial scope, current map versions and explicit conflict list. Method: construct a claim-evidence matrix, map terminology and boundaries, retain conflicting values and show which authority can resolve each. Uncertainty: source dependence, delayed agency updates and incompatible spatial references can create false agreement. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not blend conflicts, select a fact by majority, over-disclose protected data, or present an institutional estimate as an agency-confirmed fact. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can maintain one versioned common operating picture while exposing, rather than hiding, source disagreements.

EC-064

STAKEHOLDER QUESTION

Which command decisions, agency requests and open actions need coordination before the next decision point?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the authorised decision log, action tracker, agency request register, resource and service status, message approvals and handover records. Coverage: all live coordination actions in the current operational period. Timing: event-driven with an updated action view before each briefing and handover. Aggregate to decision, action, accountable function, dependency and due time; minimise personal data. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: logs can lag verbal decisions, deadlines may be conditional and telemetry cannot prove action completion.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, agency liaison, emergency coordination lead and each action or dependency owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the current command decision and responsible owner's confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and dependency comparison, not task issuance or priority override. Decision interval: continuously during active coordination and at each operational-period checkpoint. Minimum evidence: a current authoritative decision or request, accountable function, due or verification condition, dependency status and latest confirmation. Method: separate decisions from requests, track status and dependencies, preserve changes and flag actions lacking owner, due condition or evidence. Uncertainty: verbal updates, shared ownership and hidden dependencies can make status incomplete. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not issue, reprioritise or close actions, infer completion from sensor data, assign blame, or override command deadlines. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can sequence the next coordination cycle around command deadlines, dependencies and actions that lack an owner or decision.

EC-065

STAKEHOLDER QUESTION

What sharing authority, security route, minimisation and retention rule applies to each information type requested by a partner?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the current information-sharing agreements, data-classification register, incident request and purpose, recipient directory, secure-channel health and disclosure records. Coverage: the requested data fields, incident purpose, recipient agency and approved communication channel. Timing: at every new request, purpose change, recipient change or channel failure. Aggregate to data category and permission decision; no bulk export or personal data unless explicitly authorised and necessary. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: agreements may not cover a novel purpose, recipient identity can be uncertain and emergency powers require authoritative interpretation.

AUTHORITATIVE SUPPORTING DATA

Owners: information-governance lead, incident commander, data owner, legal or compliance adviser and receiving agency. Precedence: current incident command and emergency services, then the current approved plan or direction and current lawfully authorised command and information-governance decision; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: current command, information-governance and legal owners, data owners and verified agency recipients. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: authoritative permission lookup and field-level comparison, not legal interpretation by the service. Decision interval: before every proposed disclosure and whenever purpose, recipient, information type or channel changes. Minimum evidence: identified data owner, stated operational purpose, verified recipient, classification, applicable authority or emergency basis, approved secure route, minimisation rule and retention instruction. Method: classify each requested field as permitted, prohibited or needs-owner-decision; record the exact authority, decision maker, evidence snapshot and transfer route. Uncertainty: novel purposes, ambiguous recipient identity and incomplete agreements require human legal or information-governance assessment. Safe failure: disclose nothing through the service, show the unresolved control and route the request to current command and the named data or governance owner.

ANSWER BOUNDARY

Do not make a legal determination, disclose data, infer consent, bypass controls, or widen purpose or retention beyond the authoritative decision. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can route each proposed disclosure to the correct owner and prepare only the minimum authorised fields through the approved secure route.

EC-066

STAKEHOLDER QUESTION

How do current institutional place, asset and access labels translate into responder terminology, and where is the crosswalk uncertain?

SENSORS AND TELEMETRY

Proposed only: current controlled building and asset maps, live incident-zone definitions, current access-point register, agency gazetteers or grid references and authorised map annotations. Coverage: the operational area, routes, receiving points and assets needed for the current incident. Timing: on map, zone, cordon or agency-reference change, with versioned snapshots. Aggregate to zone, asset and access-point crosswalk; exclude sensitive details not required by the recipient. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: names can be duplicated, current use may differ from labels, coordinate systems can be mixed and the May 2021 plan is not current authority.

AUTHORITATIVE SUPPORTING DATA

Owners: building information owner, mapping or GIS owner, security control room, agency liaison, incident commander and responding agency. Precedence: current incident command and emergency services, then the current approved plan or direction and current authorised operational map and the responding agency's accepted reference system; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, geospatial transformation and comparison, not current-use inference. Decision interval: before joint mapping, responder arrival and every boundary change. Minimum evidence: current map version and effective time, verified coordinate reference or naming scheme, mapped access points and agency confirmation of the target reference. Method: create a versioned crosswalk with confidence per feature, transform coordinates using declared parameters and flag unmatched or ambiguous labels. Uncertainty: survey error, outdated drawings and temporary changes can make the mapping wrong. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not use the May 2021 floor plan to establish current use, conceal coordinate uncertainty, publish sensitive access detail broadly, or direct responders. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can give responders an intelligible crosswalk while clearly marking labels or geometry that still require current owner confirmation.

EC-067

STAKEHOLDER QUESTION

Which partner requests are open, who owns each response, and what status, deadline or constraint is authoritative?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the authorised agency request register, call and message logs, action tracker, resource and service status, information-sharing decisions and response acknowledgements. Coverage: all live agency requests and the institutional functions responsible for response. Timing: on request receipt, clarification, assignment, status change and completion confirmation. Aggregate to request, agency, accountable function, due condition and status; minimise personal data. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: requests can be duplicated or ambiguous, verbal changes may lag the register and a system event does not prove fulfilment.

AUTHORITATIVE SUPPORTING DATA

Owners: agency liaison, incident commander, emergency coordination lead and each response owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the requesting agency's current authorised request and command priority; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and dependency tracking, not acceptance or task authorisation. Decision interval: continuously and before each joint briefing or handover. Minimum evidence: attributable request, time, purpose, accountable function, current response or constraint and latest confirmation. Method: deduplicate while preserving source, classify received, clarifying, accepted, in progress, blocked, fulfilled or closed by authority, and show dependencies. Uncertainty: informal requests, scope changes and conflicting priorities can make status provisional. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not accept, reject, reprioritise or close a request, promise fulfilment, infer completion, or disclose request content beyond need-to-know. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can keep partner requests from being lost, duplicated or reported complete without authoritative evidence.

EC-068

STAKEHOLDER QUESTION

Which receiving point, access route, rendezvous arrangement and liaison function should be prepared for each responding agency?

SENSORS AND TELEMETRY

Proposed only: current receiving-point and route records, gate or door state, lighting and power, local communications health, access-pack inventory, anonymous occupancy band and authorised agency arrival information. Coverage: the approved external receiving point, route, staging location and liaison function. Timing: on agency notification, ETA update, route or cordon change and resource readiness update. Aggregate to agency, receiving point and readiness state; no vehicle or responder tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: ETA can change, gate state does not prove route clearance, occupancy bands are approximate and agency needs can differ.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, agency liaison, security control room, building manager and responding agency. Precedence: current incident command and emergency services, then the current approved plan or direction and responding-agency requirement and current command-approved receiving arrangement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and requirement comparison, not dispatch or access control. Decision interval: before arrival and after any material access or agency requirement change. Minimum evidence: confirmed agency, authorised receiving point, current route and access state, named liaison function, communication route and known constraints. Method: match agency requirements with the prepared point, list gaps and alternatives for command approval and retain evidence age. Uncertainty: external traffic, last-minute agency changes and unobserved obstruction can invalidate readiness. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not direct or track responders, remotely control access, promise route or staging availability, or expose sensitive arrangements publicly. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare a safe and efficient agency arrival without assuming access, rendezvous or liaison arrangements remain unchanged.

EC-069

STAKEHOLDER QUESTION

What authority, facts, decisions, open actions, restrictions and unresolved risks must be handed over at command or shift change?

SENSORS AND TELEMTRY

Proposed only; no physical sensor can establish the requested judgement. Use the current command record, approved situation report, decision and action logs, agency request status, communication records, verified telemetry snapshots, restrictions and source-health metadata. Coverage: the active incident, current operational period and receiving command or coordination function. Timing: at every planned or unplanned handover; freeze evidence at the handover time while retaining later updates separately. Aggregate to claim, action, restriction, source and accountable function; minimise personal data. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: handover packs can become stale during preparation, verbal context can be omitted and telemetry snapshots do not replace authoritative facts.

AUTHORITATIVE SUPPORTING DATA

Owners: outgoing and incoming command, emergency coordination lead, agency liaison, records manager and competent subject owners. Precedence: current incident command and emergency services, then the current approved plan or direction and the formal command-transfer record and incoming authority's acknowledgement; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: outgoing and incoming command, authorised coordination and agency liaison functions, records manager and relevant competent owners. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and structured handover synthesis, not transfer of authority by the service. Decision interval: at command transfer, shift change and any significant liaison handover. Minimum evidence: current authority record, effective transfer time, approved facts, open actions and owners, restrictions, unresolved conflicts, source times and recipient acknowledgement. Method: create a versioned handover pack, distinguish frozen handover state from subsequent events and require explicit acknowledgement of critical unresolved items. Uncertainty: rapid change, clock mismatch and missing verbal context can undermine completeness. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not transfer authority, omit material uncertainty, alter source records, disclose beyond the recipient's need, or treat receipt as understanding. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can conduct a disciplined handover that preserves authority, decision context, evidence age and unresolved risk.

EC-070

STAKEHOLDER QUESTION

What minimum operational briefing does each agency need at this phase, and what information should be deferred or separately approved?

SENSORS AND TELEMTRY

Proposed only; no physical sensor can establish the briefing need. Use the current agency task or information-needs matrix, the receiving agency's verified request and role, the command-approved fact set, current common-operating-picture version, open-risk and action registers, approved maps, secure-channel health and disclosure decision from the relevant owner. Coverage: the named agency, operational task and current incident phase only. Timing: before the initial briefing, each scheduled update and any material change in task, facts, recipient or authority. Aggregate to approved briefing field and source status; keep personal or sensitive detail outside unless explicitly authorised and necessary. Quality gate: verify recipient and endpoint identity, source version, map and terminology alignment, clock offset, feed health, gaps and end-to-end provenance; show the evidence cutoff and last update. Limits: generic agency profiles may not fit a novel incident, and a complete-looking pack can still contain stale or disputed facts.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, agency liaison, information-governance lead, subject-matter owners and the receiving agency. Precedence: current incident command and responding emergency services, then the current approved direction, the receiving agency's stated operational task and the field-level disclosure decision under EC-065; telemetry only corroborates. Keep effective, observed, ingested and retrieved times separate, and show source age at the briefing cutoff. Permissions: current command, agency liaison, relevant data owners, information governance and verified authorised recipients. Preserve the briefing version, owner, source identifiers, transformations, omissions and secure transfer record. Apply owner validity windows; label stale, superseded, unverified or conflicting material and never blend conflicts. The May 2021 floor plan is historical context only and cannot establish current access or use.

ANALYSIS REQUIRED

Operation: lookup and phase-specific briefing assembly after the sharing decision, not independent legal interpretation or operational direction. Decision interval: before each agency briefing and whenever the agency task, incident phase or material fact changes. Minimum evidence: verified agency and recipient, current operational task, command-approved facts, current maps or status version, unresolved risks and actions, field-level permission, secure route and evidence cutoff. Method: select the minimum facts needed for the current task, preserve source and confidence labels, separate confirmed facts from estimates and unresolved conflicts, and defer non-critical or separately controlled material. Uncertainty: fast-changing conditions, terminology mismatch and incomplete agency context can make a previously adequate brief stale. Safe failure: provide no generated pack, state the missing authority, recipient, source or purpose, and route the briefing decision to command, liaison and information-governance owners.

ANSWER BOUNDARY

Do not decide an agency's operational need, disclose information, infer consent or emergency authority, include personal or sensitive fields by default, or bypass secure channels. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prepare a phase-appropriate agency brief that is operationally sufficient, time-stamped and no broader than the authorised purpose.

EC-071

STAKEHOLDER QUESTION

Which areas, assets and services are formally released, restricted, still affected or not yet assessed?

SENSORS AND TELEMETRY

Proposed only: current command restrictions, competent inspection and test results, incident-relevant environmental measurements, fire and life-safety system status, utilities and building-service states and closure records. Coverage: all affected areas, critical assets and services within the recovery scope. Timing: on each inspection, test, restriction or release update, with native observation times. Aggregate to area, asset and service evidence state; no occupancy or individual-health inference. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: stable readings do not prove risk removal, inspections may be partial and service restoration does not equal authorised release.

AUTHORITATIVE SUPPORTING DATA

Owners: incident commander, building manager, fire-safety or hazard specialist, estates engineering, emergency services and institutional recovery lead. Precedence: current incident command and emergency services, then the current approved plan or direction and explicit release or restriction by the competent authority; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and status comparison, not release recommendation or safety certification. Decision interval: at each recovery checkpoint and before any reoccupation or service-use discussion. Minimum evidence: current command or competent release record, inspection or test scope and time, unresolved restrictions and current service states. Method: classify released, released with conditions, restricted, affected, not assessed or conflicting, and separate observation from authoritative decision. Uncertainty: hidden damage, limited inspection scope and delayed records can leave residual uncertainty. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not release an area, authorise re-entry, declare safety, infer exposure or health effects, or use stable telemetry as permission to return. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can maintain a controlled recovery status and prevent stable telemetry or partial inspection from being described as formal release.

EC-072

STAKEHOLDER QUESTION

Which evidence-based prerequisites remain before each area, asset or service can return to authorised use?

SENSORS AND TELEMETRY

Proposed only: the current recovery checklist, inspection and test certificates, fire and life-safety system status, utility restoration, cleaning or remediation records, access and route status, open actions and competent sign-offs. Coverage: each affected area, asset or service and its verified dependencies. Timing: on every prerequisite update and at formal recovery checkpoints. Aggregate to prerequisite and owner status; no person-level return decision. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: a completed work order does not prove successful testing, certificates can have limited scope and dependencies may be hidden.

AUTHORITATIVE SUPPORTING DATA

Owners: recovery lead, building manager, fire-safety or hazard specialist, estates engineering, service owner, insurer or regulator where applicable and incident commander. Precedence: current incident command and emergency services, then the current approved plan or direction and current competent sign-off and institutional approval procedure; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and prerequisite comparison; recommendation is limited to identifying missing evidence for authoritative assessment. Decision interval: before any proposed return to use and after a prerequisite changes. Minimum evidence: current prerequisite list, accountable owner, evidence of completion or test, effective time, dependencies and explicit release authority. Method: evaluate each prerequisite separately, retain conditional sign-offs and flag completion claims lacking test or scope evidence. Uncertainty: scope mismatch, temporary remedial works and unresolved secondary hazards can make completion misleading. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not approve reoccupation or service return, certify compliance, treat work-order closure as safety evidence, or set aside a required competent sign-off. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can assign and track the remaining competent checks before a return-to-use decision is placed before the authorised owner.

EC-073

STAKEHOLDER QUESTION

Which critical activities are displaced, what dependencies block them, and which approved continuity options are viable now?

SENSORS AND TELEMETRY

Proposed only: current service and space availability, booking or activity records, network and power status, environmental condition bands, route and access status, resource capacity and approved continuity plans. Coverage: critical functions affected by the incident and authorised alternative spaces or services. Timing: at recovery activation and after any service, space, route or capacity change. Aggregate to function, dependency and broad capacity state; no individual productivity or attendance inference. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: bookings do not prove suitability or availability, capacity bands are approximate and alternative sites can share failed dependencies.

AUTHORITATIVE SUPPORTING DATA

Owners: business-continuity lead, service owners, building or space manager, IT and estates owners, accessibility lead and recovery command. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved continuity plan and responsible service-owner confirmation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, dependency calculation and option comparison; any recommendation is for authoritative assessment. Decision interval: at each continuity planning cycle and after a material dependency change. Minimum evidence: defined critical activity, current impact, verified dependencies, approved alternatives, current capacity and owner confirmation. Method: construct a dependency and option matrix, expose shared failure points and distinguish observed availability from planned capacity. Uncertainty: unknown demand, hidden dependencies and temporary changes can make an option non-viable. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not move activities, promise capacity or service levels, infer staff or student availability, inspect research content, or override continuity owners. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prioritise continuity actions around the dependencies that actually block critical activity and avoid presenting unapproved alternatives as available.

EC-074

STAKEHOLDER QUESTION

Which incident records and telemetry must be preserved, by whom, for what authorised purpose and under what retention controls?

SENSORS AND TELEMETRY

Proposed only: source-system logs, raw telemetry and quality metadata, command and decision records, communications logs, access and change histories, approved reports, photographs or files supplied through authorised procedures, and cryptographic hashes or immutable storage receipts. Coverage: only evidence relevant to the authorised incident, legal, insurance, safety, learning or maintenance purpose. Timing: at evidence-freeze points, incident close and before source retention would expire. Aggregate to record set and purpose; preserve source granularity while controlling disclosure and avoiding unnecessary personal data. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: source clocks can differ, export can lose metadata, retention obligations can conflict and hashing proves integrity only from the captured point.

AUTHORITATIVE SUPPORTING DATA

Owners: records manager, incident commander, information-governance and legal owners, system owners, safety lead and authorised investigators. Precedence: current incident command and emergency services, then the current approved plan or direction and current legal hold, records policy and authorised investigative or learning purpose; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: authoritative lookup, evidence inventory and integrity verification, not determination of legal relevance by the service. Decision interval: at activation where volatile evidence is at risk, at handover and at incident close. Minimum evidence: identified owner and purpose, source record scope, effective retention or hold, permission, native timestamps, export method and integrity evidence. Method: create a manifest, preserve raw and derived versions, record transformations and access, and flag unavailable or already overwritten sources. Uncertainty: incomplete exports, proprietary systems and prior retention can prevent full preservation. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not alter or delete source records, decide legal privilege, collect unrelated personal data, bypass permissions, or claim that a hash establishes truth. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can preserve a defensible incident record before logs rotate or devices are reset, while enforcing purpose, access and retention controls.

EC-075

STAKEHOLDER QUESTION

Which authorised post-incident welfare, support and contact actions remain open, and which data may be used to manage them?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the approved welfare-action register, helpline or support-service availability, aggregate referral status, authorised communications and action acknowledgements. Coverage: institutional support actions and service availability, not individual health, case details or inferred need. Timing: on action creation, service change, authorised aggregate update and closure confirmation. Aggregate to action and service status; personal case information remains in the authorised support system. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: aggregate status cannot show individual outcomes, referrals can be confidential and service availability can change.

AUTHORITATIVE SUPPORTING DATA

Owners: welfare lead, occupational health or student or staff support owner, information-governance lead, recovery lead and communications owner. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved welfare procedure and responsible support-service decision; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised welfare and recovery leads, support-service owners and information-governance-approved aggregate reporting. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and action-status comparison, not medical, psychological or vulnerability assessment. Decision interval: at each recovery welfare assessment and before public or staff updates. Minimum evidence: authorised action, accountable service, due or verification condition, current service status and privacy or disclosure instruction. Method: show open, in progress, blocked, completed by owner or not reportable; keep personal case data outside the catalogue service. Uncertainty: confidentiality and partial reporting mean the aggregate picture can be incomplete. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not infer who needs support, access case records, provide health advice, contact individuals, disclose participation or assess personal outcomes. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can keep agreed support services and communications active without accessing case records or inferring who needs support.

EC-076

STAKEHOLDER QUESTION

Which exercise objectives, roles, zones, channels and inclusive arrangements were actually tested, partly tested or not tested?

SENSORS AND TELEMETRY

Proposed only: exercise-control logs, objective and inject records, message and channel logs, equipment status, anonymous route or flow counts where authorised, observer forms and participant-role acknowledgements. Coverage: the defined exercise scope and only the systems and zones authorised for observation. Timing: throughout the exercise with a frozen evidence set at each objective assessment. Aggregate to objective, function, system and zone; no individual performance or movement tracking. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: exercise simulation may not reproduce incident load, observers cover only part of the activity and safety constraints can prevent a full test.

AUTHORITATIVE SUPPORTING DATA

Owners: exercise director, emergency planning lead, accessibility lead, system owners, observers and information-governance owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the approved exercise plan and exercise-control determination; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, observation and coverage comparison, not participant assessment. Decision interval: during control assessments and at the hot and formal debriefs. Minimum evidence: approved objective and success evidence, scoped observation or log, current system mapping, clock alignment and explicit record of simulations or exclusions. Method: classify fully tested, partly tested, simulated only, not tested, failed or not assessable and retain evidence for each classification. Uncertainty: observer bias, artificial injects and incomplete instrumentation limit generalisation. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not score individuals, infer competence or stress, identify participants unnecessarily, declare operational readiness, or treat simulation as live-system proof. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can distinguish exercised capability from nominal provision and target future exercises at objectives that were not genuinely tested.

EC-077

STAKEHOLDER QUESTION

Where did the incident or exercise timeline reveal delay, communication gaps, route constraints or decision dependencies requiring human assessment?

SENSORS AND TELEMETRY

Proposed only: time-stamped command, action, message, channel, system, route and observer records together with source clock-offset and receipt-time metadata. Coverage: the defined incident or exercise period and selected decision chains. Timing: after evidence freeze and whenever a source timeline is corrected. Aggregate to event type and accountable function; remove unnecessary personal detail. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: different clocks, missing manual events and common upstream causes can create false sequence or apparent delay.

AUTHORITATIVE SUPPORTING DATA

Owners: incident or exercise lead, records manager, communications and system owners, functional leads and information-governance owner. Precedence: current incident command and emergency services, then the current approved plan or direction and the approved timeline and responsible owner's interpretation; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: timeline calculation and comparison; diagnosis and causation remain human judgements unless independently established. Decision interval: at hot debrief for provisional findings and formal assessment after clock and provenance checks. Minimum evidence: attributable events, clock offsets, native and receipt times, defined expected sequence and known missing-source list. Method: align clocks, calculate intervals with uncertainty, compare expected and observed sequences and flag dependencies without assigning cause. Uncertainty: clock error, retrospective entry and omitted verbal decisions can materially change the apparent delay. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not attribute blame or causation, score individuals, infer intent, or present a temporal association as proof of failure mechanism. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can commission human assessment of specific delay points and dependencies instead of attributing causation from timestamps alone.

EC-078

STAKEHOLDER QUESTION

Which corrective actions have an owner, deadline, dependency and credible completion evidence, and which are blocked or overdue?

SENSORS AND TELEMETRY

Proposed only; no physical sensor can establish the requested judgement. Use the approved action tracker, work orders, procurement or change records, updated controlled plans, training records, test and inspection results and owner acknowledgements. Coverage: all actions accepted through the authorised post-incident or exercise governance procedure. Timing: on action creation, owner or due-date change, evidence submission, assessment and closure. Aggregate to action, owner function, dependency and status; avoid individual performance profiling. Quality gate: verify endpoint identity, schema and mapping, commissioning, clock offset, heartbeat and uptime, gaps and end-to-end provenance; for any physical point also verify placement, calibration and drift. Show last-good time separately from feed health. Limits: work-order closure may not prove effectiveness, evidence can be scoped narrowly and overdue status can depend on an approved change.

AUTHORITATIVE SUPPORTING DATA

Owners: recovery or emergency planning lead, action owners, governance board, competent system owners and records manager. Precedence: current incident command and emergency services, then the current approved plan or direction and the authorised action decision and closure approval by the responsible governance owner; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup and completion-evidence comparison, not automatic closure or effectiveness diagnosis. Decision interval: at each action checkpoint and before readiness reporting. Minimum evidence: approved action, accountable owner, due or verification condition, dependencies, claimed completion evidence and closure authority. Method: classify open, in progress, blocked, overdue, evidence submitted, verified by owner or formally closed; retain rejected evidence and scope limits. Uncertainty: weak evidence, changed scope and shared dependencies can produce false closure. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not close, cancel or reprioritise actions, certify effectiveness, blame an owner, or treat a more favourable telemetry trend alone as proof of completed corrective action. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can escalate blocked or overdue actions and accept closure only when the competent owner provides credible evidence.

EC-079

STAKEHOLDER QUESTION

Which recurring patterns across incidents and exercises may indicate a systemic weakness, and which are too uncertain or confounded to act on?

SENSORS AND TELEMETRY

Proposed only: standardised incident and exercise records, source-quality metadata, system faults, communication and route events, action outcomes and controlled contextual variables such as scope and building mode. Coverage: comparable events and only variables collected under compatible definitions and permissions. Timing: at scheduled assurance assessments, not during urgent incident command unless specifically authorised. Aggregate to de-identified event, system, zone and issue category; no individual performance or behavioural profiling. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: small samples, changing systems, inconsistent coding and repeated common causes can create spurious patterns.

AUTHORITATIVE SUPPORTING DATA

Owners: emergency planning lead, safety and system owners, data or assurance lead, information-governance owner and governance board. Precedence: current incident command and emergency services, then the current approved plan or direction and competent owner interpretation and the authorised assurance procedure; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: comparison and statistical estimate; diagnosis and causal claims require separate investigation. Decision interval: quarterly or owner-defined checkpoint and after a sufficient comparable event set is available. Minimum evidence: at least three comparable events for a provisional recurrence statement, consistent definitions, known exposure or opportunity counts, source-quality checks and documented context changes. Method: compare rates and sequences with uncertainty, stratify by relevant context, avoid composite scores and label exploratory findings explicitly. Uncertainty: low counts, reporting bias and system changes can reverse or explain apparent recurrence. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not claim causation, profile people or teams, infer negligence, generalise from incomparable events, or present exploratory association as a confirmed systemic defect. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prioritise investigation of repeat weaknesses while avoiding action on patterns produced by inconsistent coding or incomplete exposure data.

EC-080

STAKEHOLDER QUESTION

What is the evidence-backed readiness picture for the next activation, and which capability claims are supported, qualified, unsupported or not assessed?

SENSORS AND TELEMETRY

Proposed only: current plans and contacts, function coverage, critical-system health, communications tests, route and accessible-arrangement status, resource inspections, exercise evidence, open actions and source-quality metadata. Coverage: the full emergency coordination capability at plan, function, system, route, communication and resource level. Timing: at the scheduled readiness assessment and after any material plan, system, role or action change. Aggregate to capability element and evidence state; no person-level readiness or performance score. Quality gate: verify modality and placement or endpoint identity, current asset-to-zone mapping, commissioning, calibration where relevant, clock offset, heartbeat and uptime, gaps, drift and end-to-end provenance; show last-good time separately from feed health. Limits: readiness is context-specific, source coverage is uneven and a single score can hide a critical unsupported dependency.

AUTHORITATIVE SUPPORTING DATA

Owners: emergency planning lead, incident and institutional governance owners, fire-safety and system owners, accessibility lead and building manager. Precedence: current incident command and emergency services, then the current approved plan or direction and current approved assurance framework and competent owner sign-off; proposed telemetry can only corroborate. Keep effective, observed, ingested and retrieved times separate, and show source age at the decision time. Permissions: authorised emergency coordination roles and relevant source owners under least-privilege access. Preserve owner, record identifier and version, source path, transformations and the evidence snapshot used. Apply the owner's validity window; label stale, superseded, unverified, unmapped or conflicting evidence explicitly and never blend conflicts. The May 2021 floor plan is historical context only.

ANALYSIS REQUIRED

Operation: lookup, comparison and assurance synthesis; no universal score, certification or incident-outcome forecast. Decision interval: monthly or owner-defined checkpoint and before significant planned events or building changes. Minimum evidence: current requirement set, attributable evidence and owner for each element, source-health and age limits, open conflicts and corrective-action status. Method: classify each element as supported, qualified, unsupported or not assessed, show critical dependencies and keep evidence age visible; do not average away a failed gate. Uncertainty: future incident type, temporary changes and untested interactions limit any readiness claim. Safe failure: answer qualified or unsupported, name the missing or conflicting evidence and route the decision to current command or the competent owner. Do not fill gaps or turn an estimate, forecast or recommendation into an observation.

ANSWER BOUNDARY

Do not certify readiness or compliance, predict emergency performance, score individuals, suppress unsupported elements, or use the May 2021 floor plan as current operational evidence. Never identify or track people, infer individual health or assistance needs, create personal emergency plans, issue or authorise emergency commands, control emergency systems, disclose beyond permission, promise outcomes, certify safety or readiness, or override incident command, emergency services, current plans or authorised communications.

WHY THIS IS USEFUL

The coordinator can prioritise the next test, owner confirmation or corrective action and give governance an honest readiness picture without a misleading single score.

Use the catalogue as a decision-support sequence, not an automated response plan



A DEFENSIBLE ANSWER MUST SHOW

The decision time and evidence cutoff; authoritative owner and current version; source location and provenance; observation age and feed health; minimum evidence and analysis operation; uncertainty, conflicts and unassessed areas; permissions and disclosure scope; and the safe route to command or a competent owner when evidence is insufficient.

Ten rules for safe use of the catalogue

1

COMMAND FIRST

Current incident command and responding emergency services take precedence over every record, integration, model and dashboard.

2

PROPOSED UNTIL VERIFIED

Treat sensing and integrations as unavailable until deployment, mapping, commissioning, permission and current health are independently confirmed.

3

CURRENT SPATIAL TRUTH

Use current controlled maps and competent owners. The May 2021 floor plan is historical reference only.

4

TIME IS EVIDENCE

Show effective, observed, ingested and retrieved times, the evidence cutoff and last-good source time. A fresh retrieval does not make an old observation current.

5

KEEP OPERATIONS DISTINCT

Label lookup, observation, calculation, estimate, forecast, comparison, diagnosis and recommendation accurately. Do not promote one into another.

6

MINIMUM EVIDENCE MATTERS

When a required source, map, calibration, permission or owner confirmation is missing, answer qualified, unsupported or not assessed.

7

CONFLICTS STAY VISIBLE

Do not average or silently choose between authoritative conflicts. Preserve each source, time, version and owner for human resolution.

8

PRIVACY BY DESIGN

Use zone, asset, channel or function aggregates. Do not identify or track people, infer health or assistance needs, or use telemetry as roll call.

9

LEAST PRIVILEGE

Disclose only the minimum authorised information to a verified recipient through an approved route, with stated purpose and retention.

10

SAFE FAILURE

Do not issue commands, control systems, promise outcomes or certify safety. State the evidence gap and route the decision to current command or the competent owner.

The catalogue supports authorised human coordination. It does not create authority, replace a plan, establish safety, direct people or operate emergency systems.