


new connection

SPD_MID

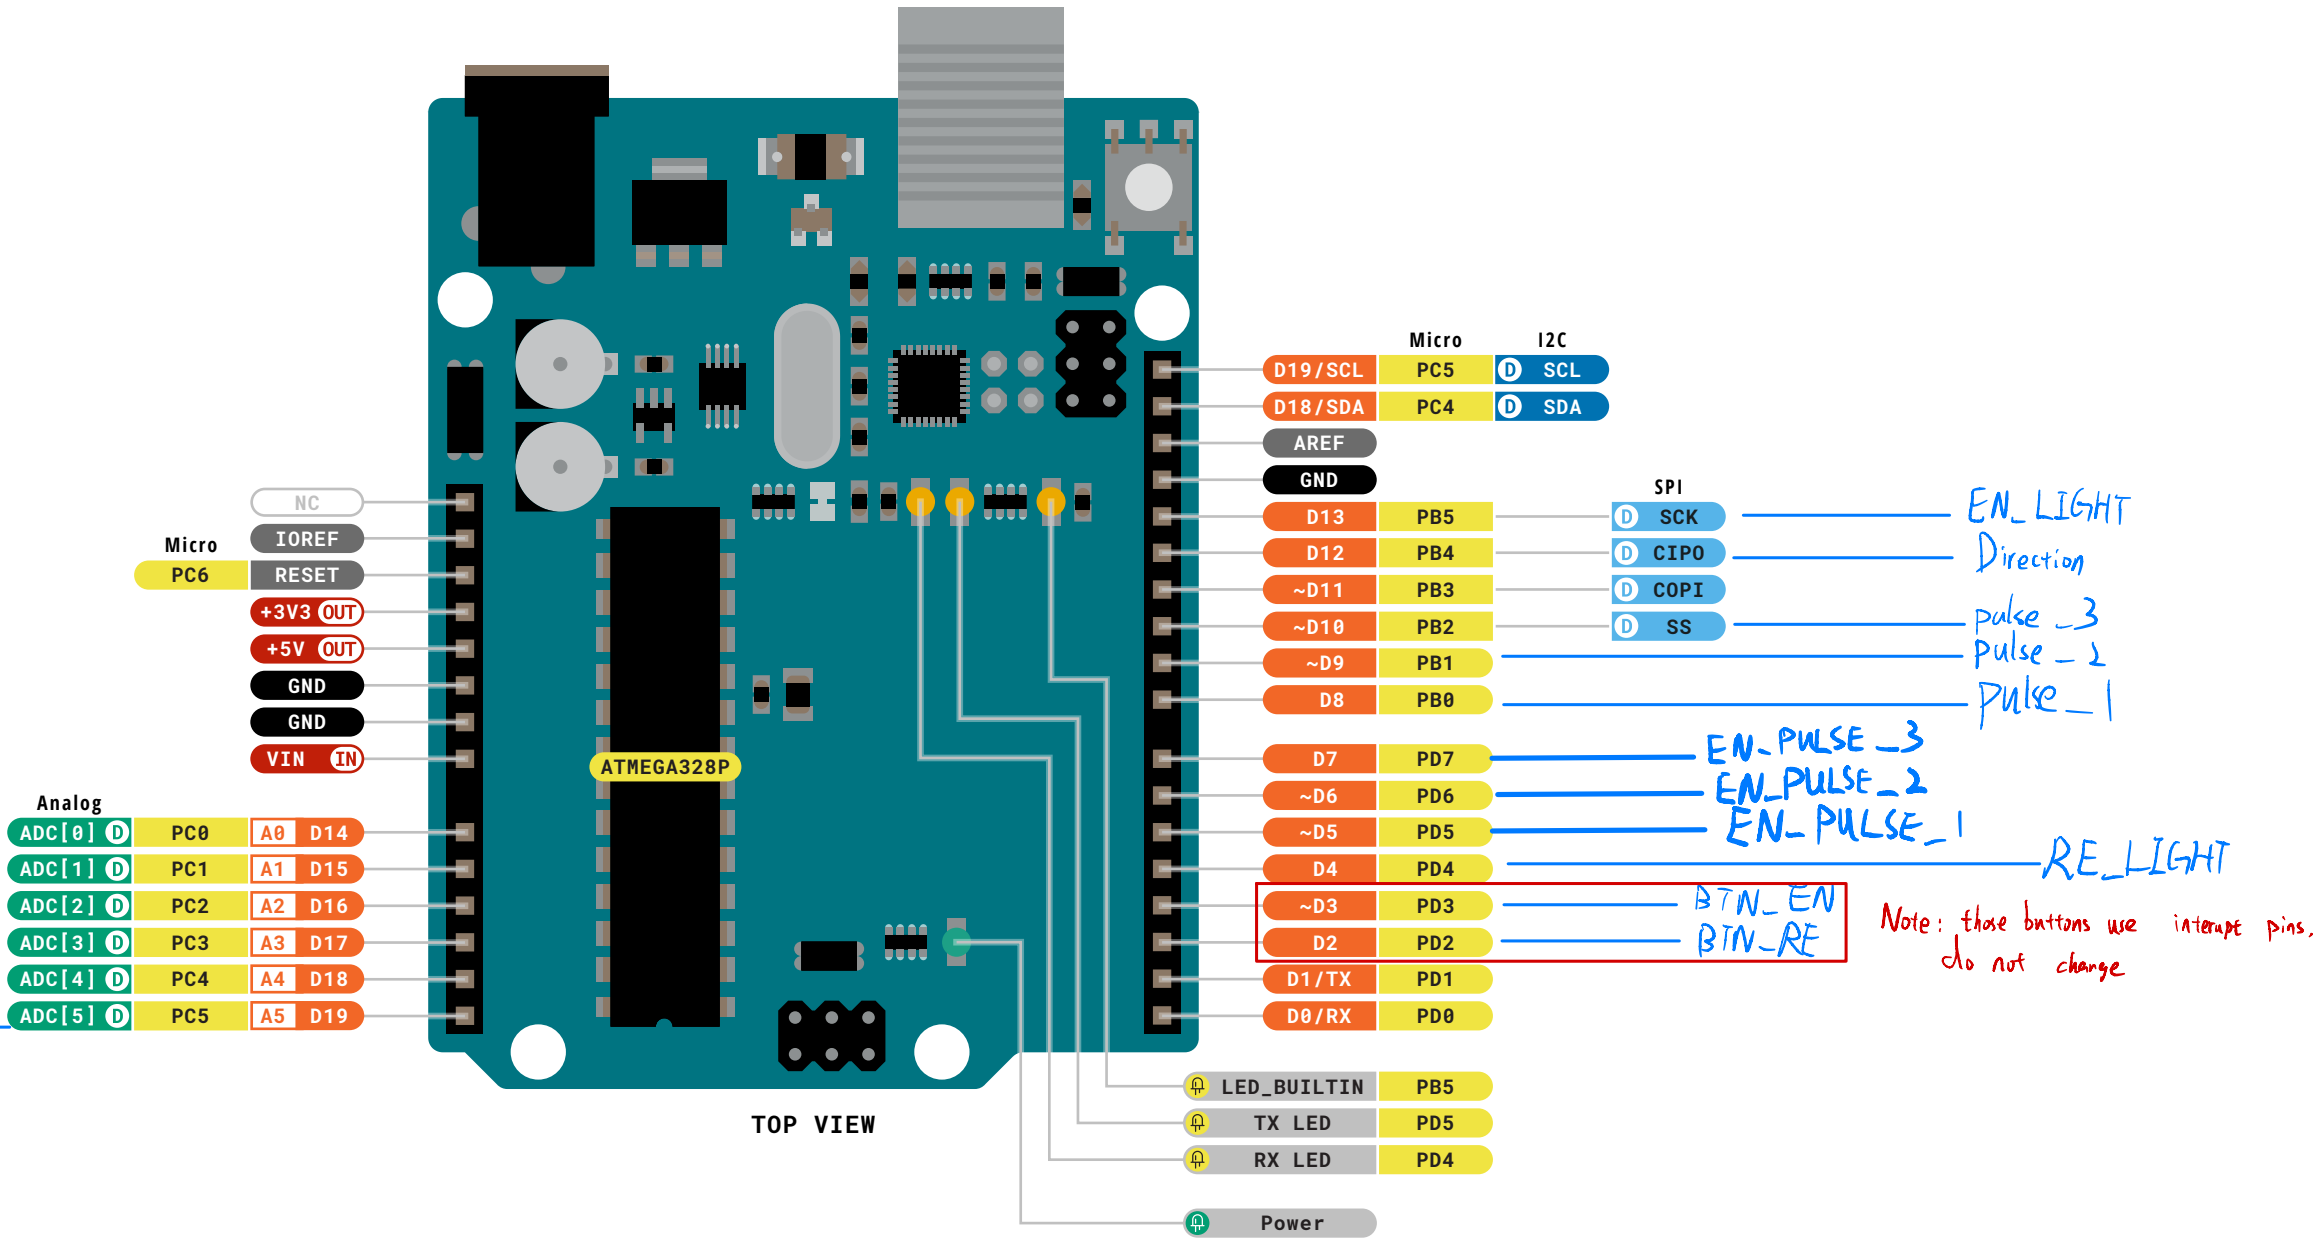

Legend:

- Power
- Power Input
- Power Output
- Ground

- GPIO Digital External
- Analog External
- Main Part
- Secondary Part
- Internal Component
- Other Pins (Reset, System Control, Debugging)

- I2C
- SPI
- UART/USART
- Other SERIAL Communication
- Analog
- PWM/Timer
- Default
- Default
- Default
- Default

- LED
- RGB LED
- Other

- MAXIMUM** current per I/O pin is 20mA
- MAXIMUM** current per +3.3V pin is 50mA
- VIN** 6-20V input to the board
- CIP0/COPI have previously been referred to as MISO/MOSI










SKU code: A000066
Full Pinout - Page 1 of 5
Last update: 6 Oct, 2022

DOCS . ARDUINO . CC

This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.


Other peripheral

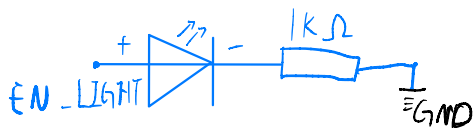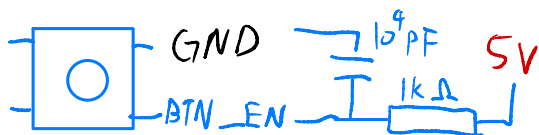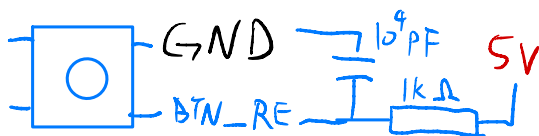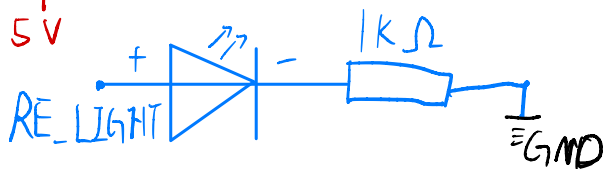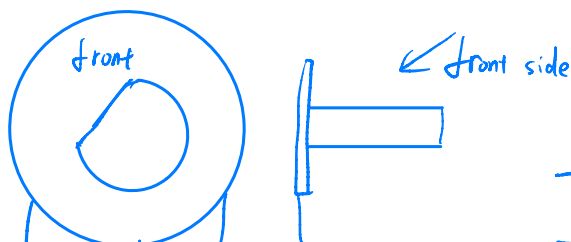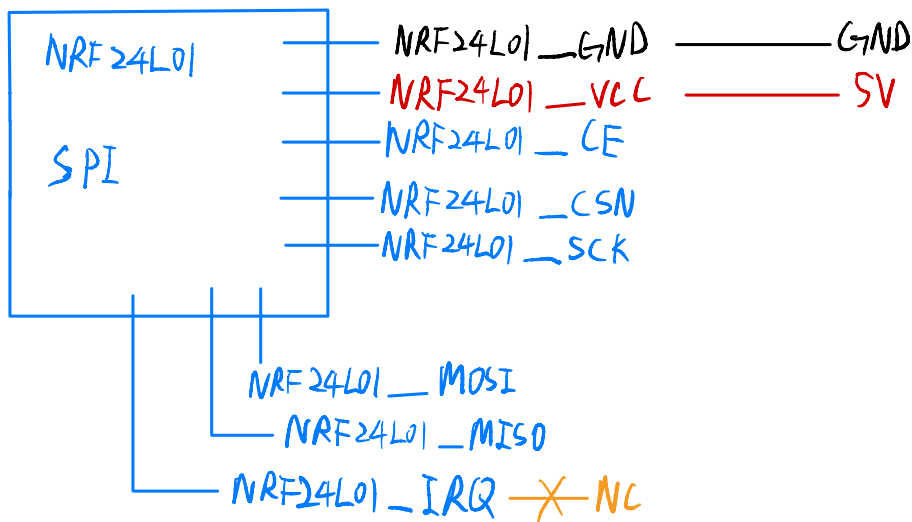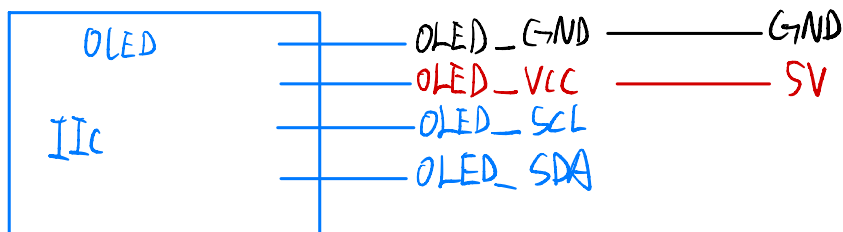



Mechanical Information

12 Pinout

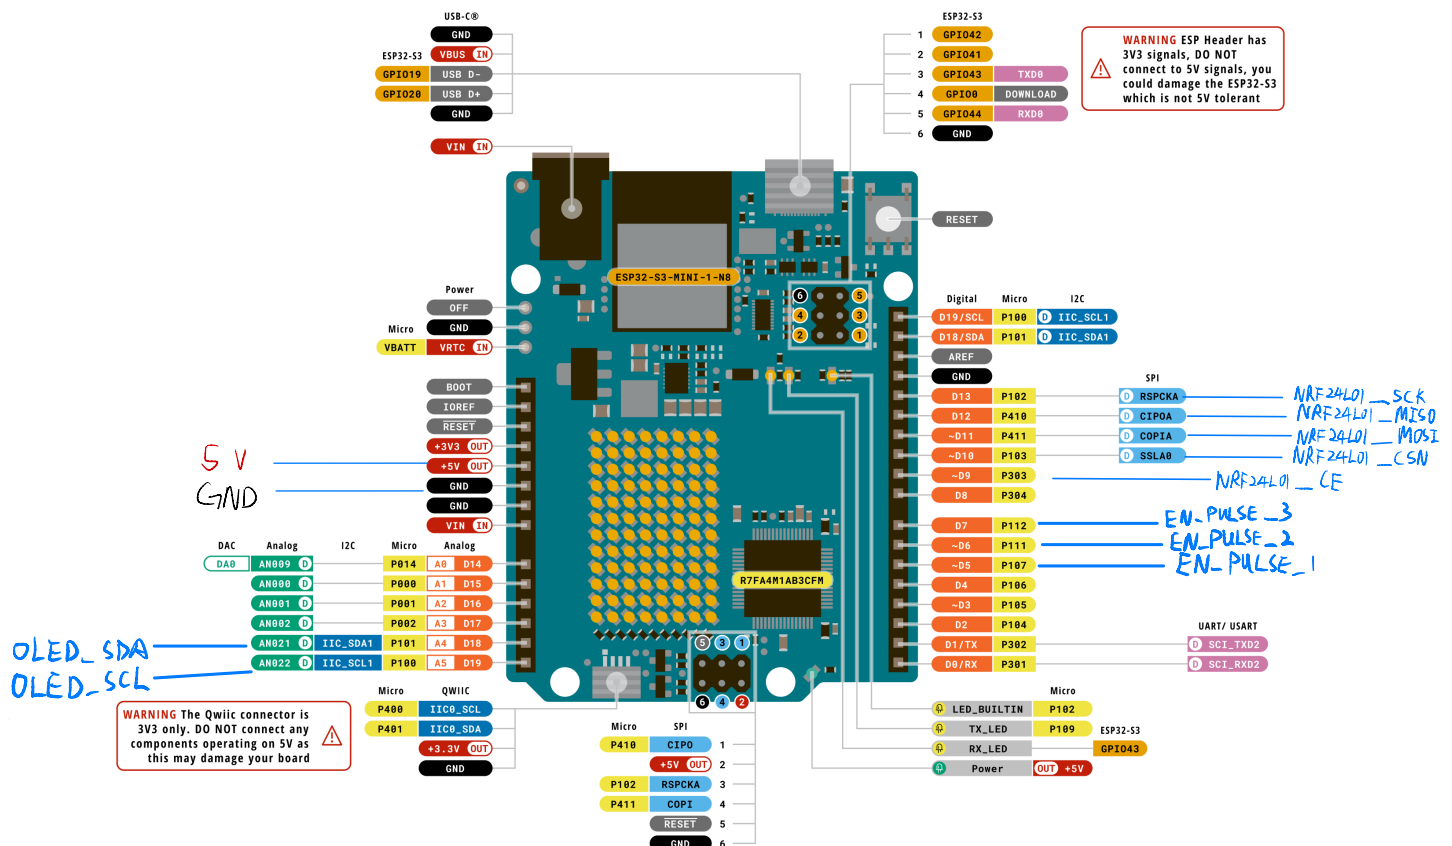

Legend:	Digital	I2C	Other SERIAL
Power	Analog	SPI	Analog
Ground	Main Part	UART/USART	PWM/Timer



UNO R4 WiFi
SKU code: ABX00087
Pinout
Last update: 30 Jun, 2023

Pinout for UNO R4 WiFi.