

```
R1#
R1#
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
O       30.0.0.0/8 [110/20] via 20.0.0.2, 00:03:07, Ethernet0/1
O       40.0.0.0/8 [110/30] via 20.0.0.2, 00:01:59, Ethernet0/1
R1#
```

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR


Gateway of last resort is not set

```
10.0.0.0/8 [110/20] via 20.0.0.1, 00:03:42, Ethernet0/0
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
    20.0.0.0/8 is directly connected, Ethernet0/0
    20.0.0.2/32 is directly connected, Ethernet0/0
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
    30.0.0.0/8 is directly connected, Ethernet0/1
    30.0.0.1/32 is directly connected, Ethernet0/1
40.0.0.0/8 [110/20] via 30.0.0.2, 00:02:19, Ethernet0/1
100.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
    100.0.0.0/16 is directly connected, Loopback0
```

```
R3#show ip
*Aug 19 16:55:22.035: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

O    10.0.0.0/8 [110/30] via 30.0.0.1, 00:00:19, Ethernet0/1
O    20.0.0.0/8 [110/20] via 30.0.0.1, 00:00:19, Ethernet0/1
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        30.0.0.0/8 is directly connected, Ethernet0/1
L        30.0.0.2/32 is directly connected, Ethernet0/1
    40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        40.0.0.0/8 is directly connected, Ethernet0/0
L        40.0.0.1/32 is directly connected, Ethernet0/0
R3#
```

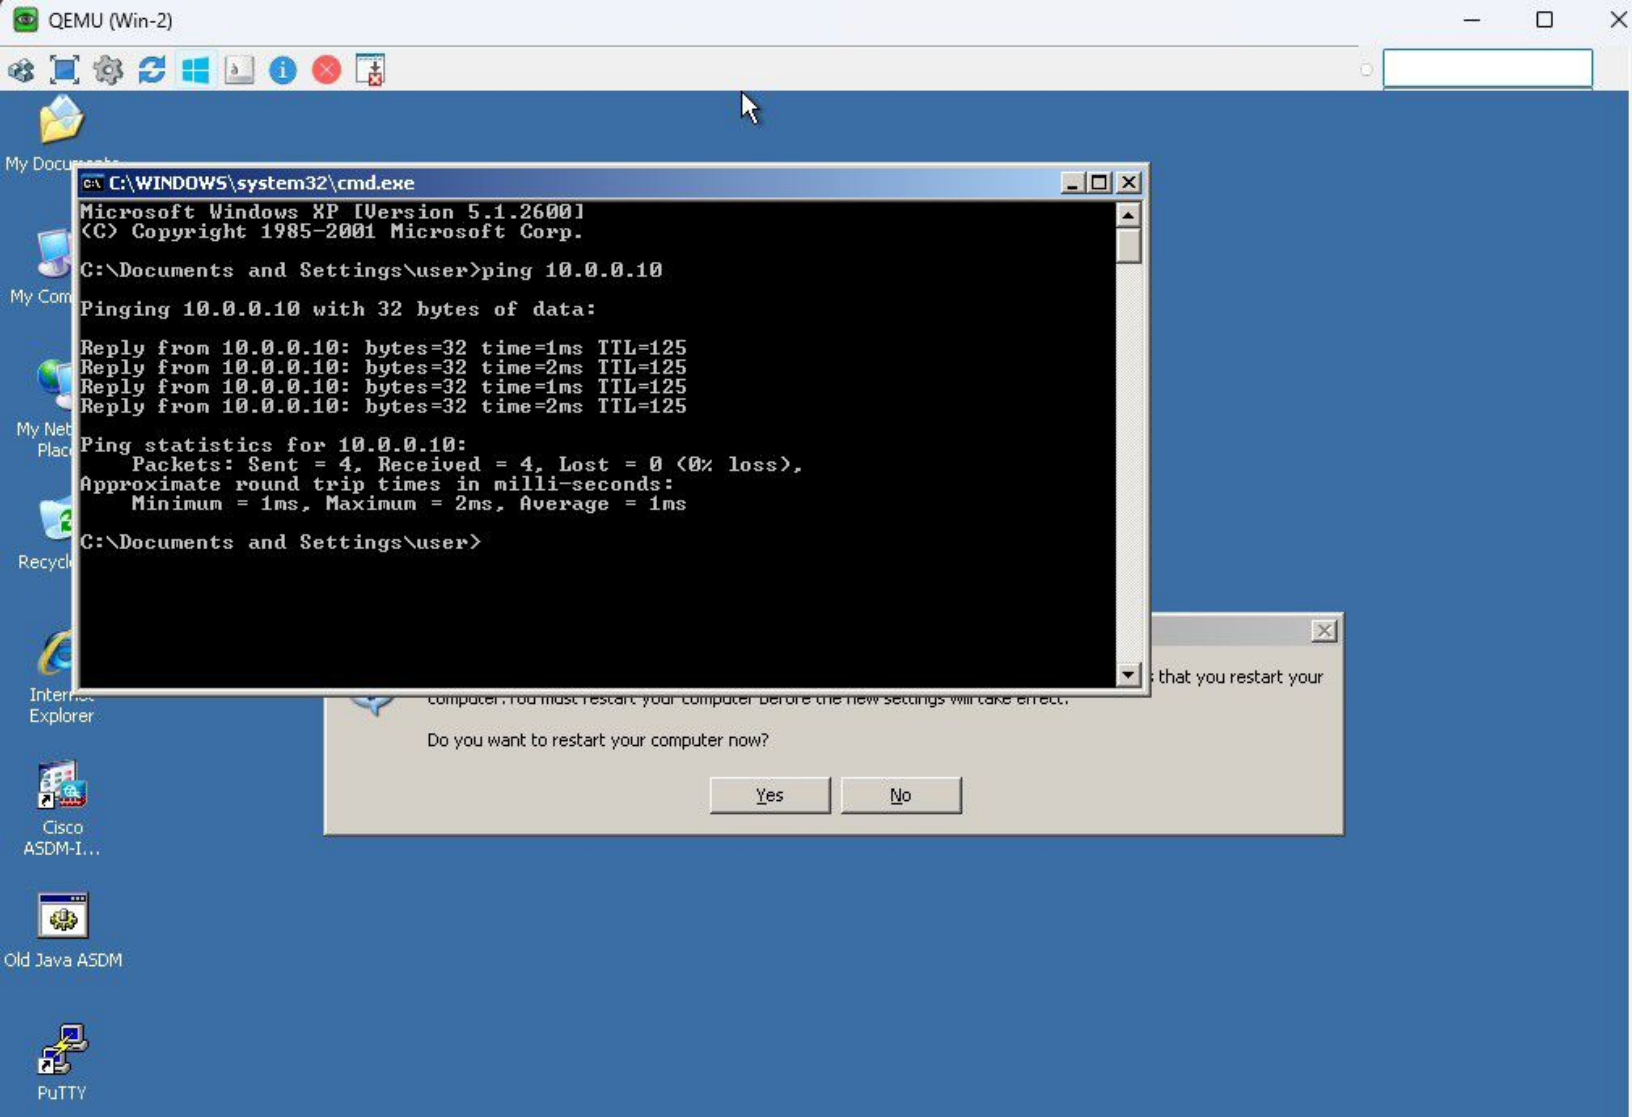



My Documents

My Computer

My Network
Places

Recycle Bin

Internet
ExplorerCisco
ASDM-I...

Old Java ASDM

PuTTY

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```