

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ncpa.cpl

C:\Documents and Settings\user>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.

Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\user>_

```
R1
*Jul 15 10:31:52.217: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
*Jul 15 10:31:52.226: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
3, changed state to down
R1(config)#
R1(config)#
R1(config)#
R1(config)#
R1(config)#
R1(config)#
R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#
R1(config-if)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no sh
R1(config-if)#
R1(config-if)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
R1(config)#end
R1#
*Jul 15 10:33:58.624: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip ro
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
```



R2



```
R2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R2(config)#int e0/0
R2(config-if)#ip add 20.0.0.2 255.0.0.0
R2(config-if)#no sh
R2(config-if)#
R2(config-if)#int e0/1
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no sh
R2(config-if)#
R2(config-if)#end
R2#
*Jul 15 10:36:00.885: %SYS-5-CONFIG_I: Configured from console by console
R2#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R2(config)#ip route 40.0.0.0 255.0.0.0 3
*Jul 15 10:36:30.112: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
R2(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
R2(config)#
R2(config)#
```



R3



```
R3#conf t
```

```
Enter configuration commands, one per line.  End with CNTL/Z.
```

```
R3(config)#int e0/0
```

```
R3(config-if)#ip add 40.0.0.1 255.0.0.
```

```
*Jul 15 10:37:55.152: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
```

```
R3(config-if)#ip add 40.0.0.1 255.0.0.0
```

```
R3(config-if)#no sh
```

```
R3(config-if)#
```

```
R3(config-if)#int e0/1
```


```
R3(config-if)#ip add 30.0.0.2 255.0.0.0
```

```
R3(config-if)#no sh
```

```
R3(config-if)#
```

```
R3(config-if)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
```

```
R3(config)#
```

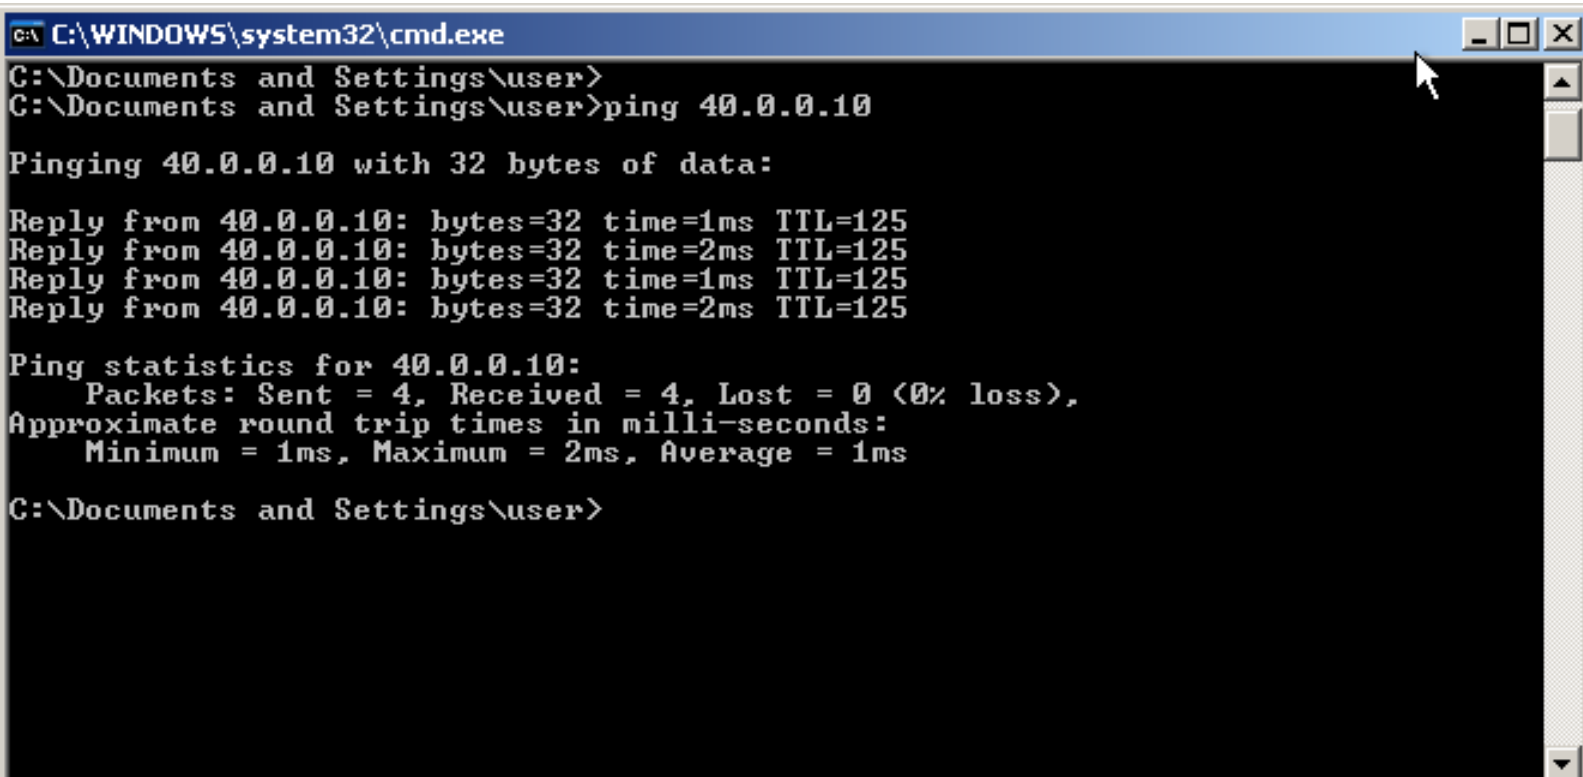

A screenshot of a Windows command prompt window. The title bar at the top reads "C:\WINDOWS\system32\cmd.exe" and includes standard minimize, maximize, and close buttons. The window has a black background with white text. The command prompt shows the user's current directory as "C:\Documents and Settings\user". The user has entered the command "ping 40.0.0.10". The output shows four successful replies from 40.0.0.10, each with 32 bytes of data, a time of 1ms or 2ms, and a TTL of 125. Below the replies, the ping statistics are displayed, showing 4 packets sent, 4 received, and 0% loss. The user's prompt "C:\Documents and Settings\user>" is visible at the bottom.

```
C:\WINDOWS\system32\cmd.exe
C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125
Reply from 40.0.0.10: bytes=32 time=1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```