



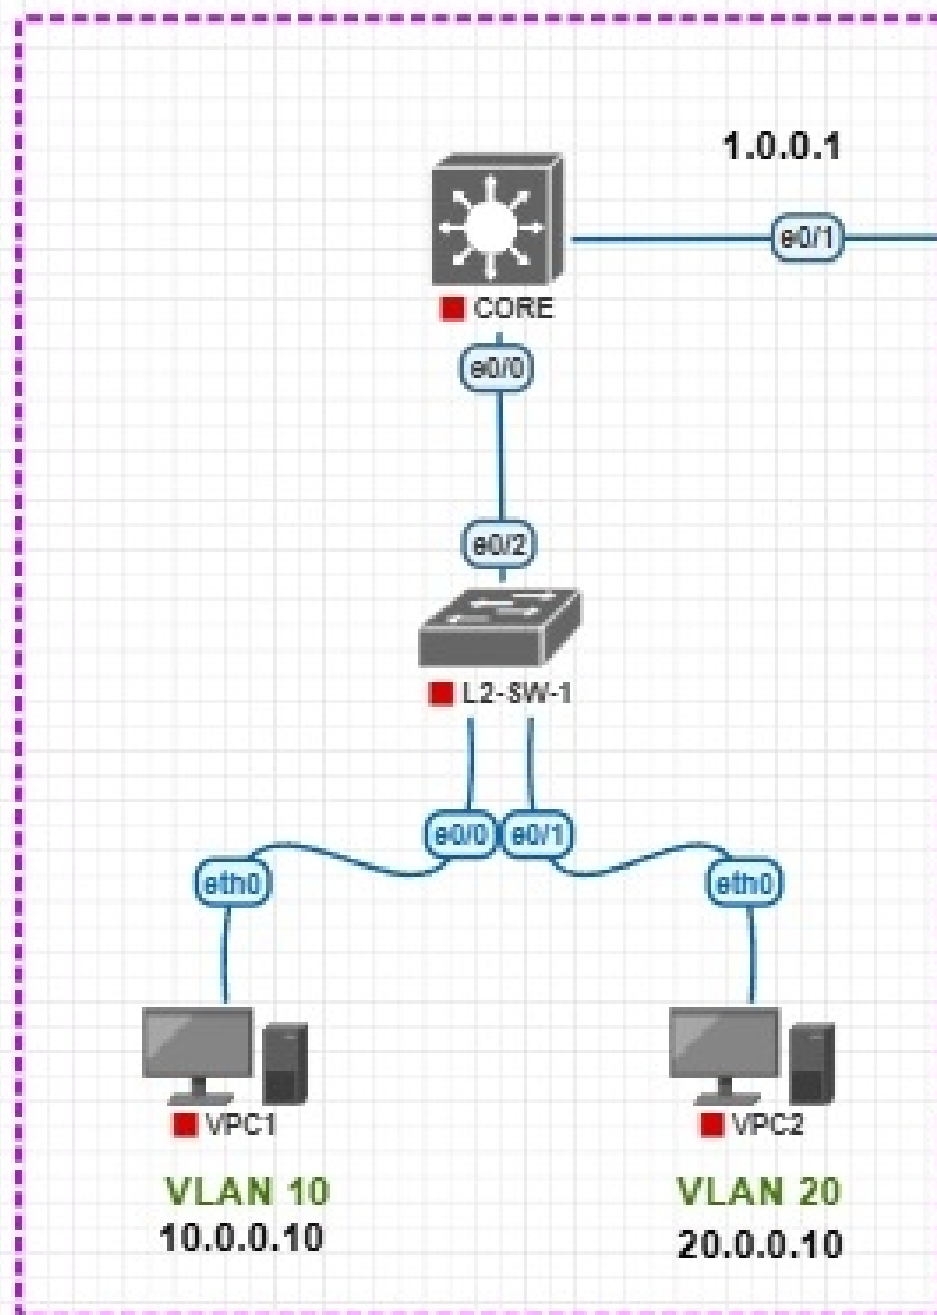

SWITCH VIRTUAL INTERFACE

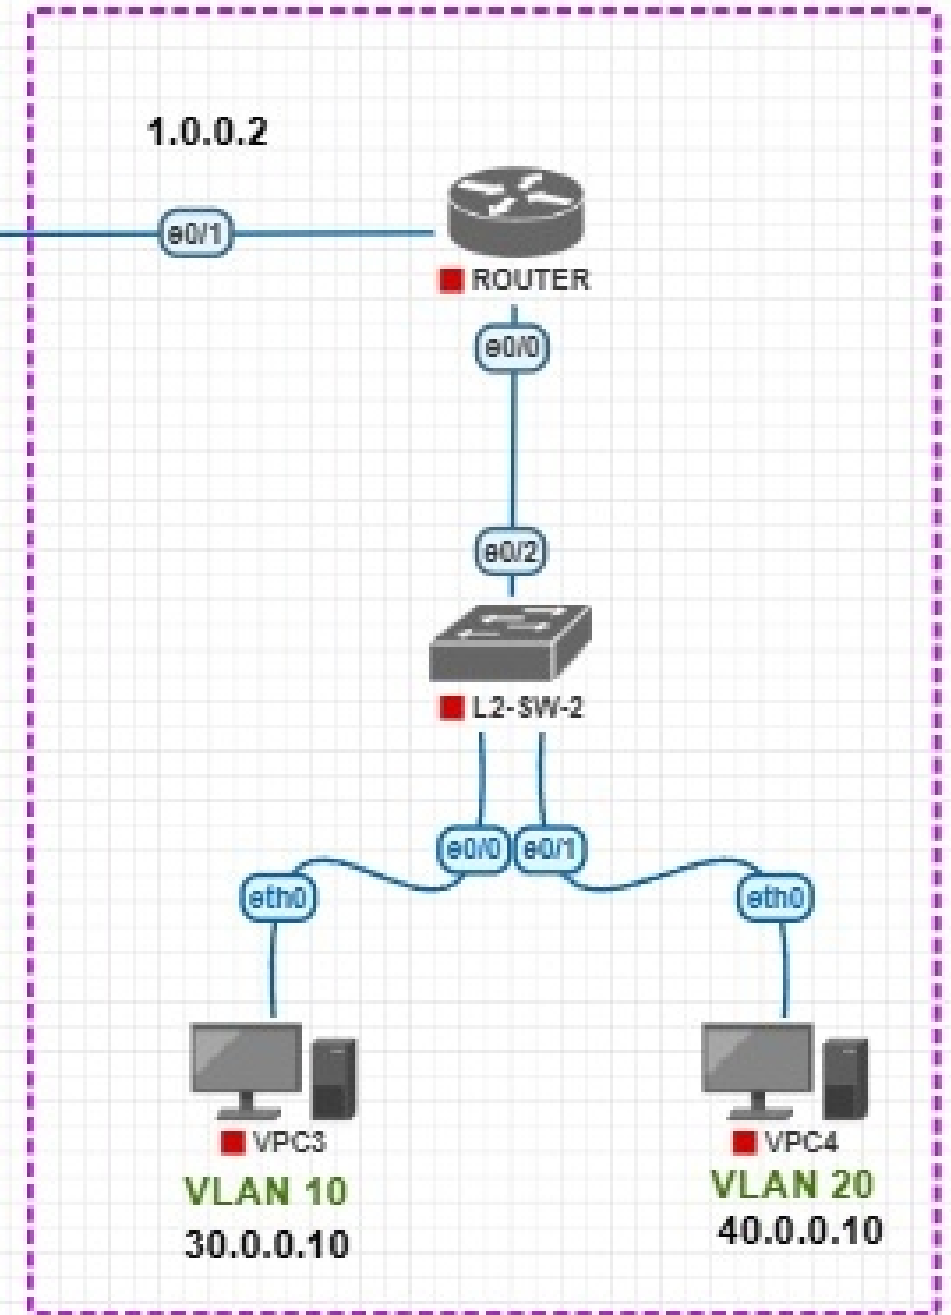

ROUTER ON-A-STICK

VLAN	Name	Status	Ports
1	default	active	Et0/3
10	HR	active	Et0/0
20	SALES	active	Et0/1
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

1.CREATE VLAN
2.ENABLE TRUNK

L2-SW-1#sh int trunk

Port	Mode	Encapsulation	Status	Native vlan
Et0/2	on	802.1q	trunking	1

Port	Vlans allowed on trunk
Et0/2	1-4094

Port	Vlans allowed and active in management domain
Et0/2	1,10,20

Port	Vlans in spanning tree forwarding state and not pruned
Et0/2	1,10,20

L2-SW-1#



VPC2



host (20.0.0.1) not reachable

VPC2> ping 20.0.0.1

host (20.0.0.1) not reachable

VPC2> ping 20.0.0.1

PING 10.10 - V10 FROM 20.10 - V20

20.0.0.1 icmp_seq=1 timeout

84 bytes from 20.0.0.1 icmp_seq=2 ttl=255 time=1.429 ms

84 bytes from 20.0.0.1 icmp_seq=3 ttl=255 time=1.725 ms

84 bytes from 20.0.0.1 icmp_seq=4 ttl=255 time=1.658 ms

84 bytes from 20.0.0.1 icmp_seq=5 ttl=255 time=1.537 ms

VPC2> ping 10.0.0.10

10.0.0.10 icmp_seq=1 timeout

84 bytes from 10.0.0.10 icmp_seq=2 ttl=63 time=2.230 ms

84 bytes from 10.0.0.10 icmp_seq=3 ttl=63 time=3.221 ms

84 bytes from 10.0.0.10 icmp_seq=4 ttl=63 time=2.435 ms

84 bytes from 10.0.0.10 icmp_seq=5 ttl=63 time=1.895 ms

VPC2> █

VLAN	Name	Status	Ports
1	default	active	Et0/3
10	HR	active	Et0/0
20	SALES	active	Et0/1
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

1.CREATE VLAN
2.ENABLE TRUNK

L2-SW-2 (config)#do sh int trunk

Port	Mode	Encapsulation	Status	Native vlan
Et0/2	on	802.1q	trunking	1

Port	Vlans allowed on trunk
Et0/2	1-4094

Port	Vlans allowed and active in management domain
Et0/2	1,10,20

Port	Vlans in spanning tree forwarding state and not pruned
Et0/2	1,10,20

L2-SW-2 (config) #

CREATE SVI

```
CORE(config)#int vlan 20
```

```
CORE(config-if)#no sh
```

```
CORE(config-if)#ex
```

```
CORE(config)#
```

```
CORE(config)#
```

```
CORE(config)#ex
```

```
*Aug 13 06:04:32.858: %LINK-3-UPDOWN: Interface Vlan20, changed state to up
```

```
CORE(config)#no sh
```

```
*Aug 13 06:04:33.858: %LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan20, changed state to up
```

```
CORE(config)#do sh ip int br
```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	unassigned	YES	unset	up	up
Ethernet0/1	1.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	unset	down	down
Ethernet0/3	unassigned	YES	unset	down	down
Vlan10	10.0.0.1	YES	manual	up	up
Vlan20	20.0.0.1	YES	manual	up	up

```
CORE(config)#
```

ROUTER (config) #

CREATE A SUB-INTERFACE

ROUTER (config) #

ROUTER (config) #do sh ip int br

Interface	IP-Address	OK?	Method	Status	Prot
Ethernet0/0	unassigned	YES	TFTP	up	up
Ethernet0/0.1	30.0.0.1	YES	manual	up	up
Ethernet0/0.2	40.0.0.1	YES	manual	up	up
Ethernet0/1	1.0.0.2	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

ROUTER (config) #

VPC4>

VPC4> ip 40.0.0.10/8 40.0.0.1

Checking for duplicate address...

pVPC4 : 40.0.0.10 255.0.0.0 gateway 40.0.0.1

VPC4> ping 30.0.0.10

84 bytes from 30.0.0.10 icmp_seq=1 ttl=63 time=2.506 ms

84 bytes from 30.0.0.10 icmp_seq=2 ttl=63 time=1.737 ms

84 bytes from 30.0.0.10 icmp_seq=3 ttl=63 time=2.497 ms

84 bytes from 30.0.0.10 icmp_seq=4 ttl=63 time=1.250 ms

84 bytes from 30.0.0.10 icmp_seq=5 ttl=63 time=1.943 ms

VPC4> ping 10.0.0.10

84 bytes from 10.0.0.10 icmp_seq=1 ttl=62 time=5.466 ms

84 bytes from 10.0.0.10 icmp_seq=2 ttl=62 time=3.794 ms

84 bytes from 10.0.0.10 icmp_seq=3 ttl=62 time=2.088 ms

84 bytes from 10.0.0.10 icmp_seq=4 ttl=62 time=3.179 ms

84 bytes from 10.0.0.10 icmp_seq=5 ttl=62 time=3.322 ms

VPC4> █

**PING 10.10- V20 FROM
40.10-V10**