





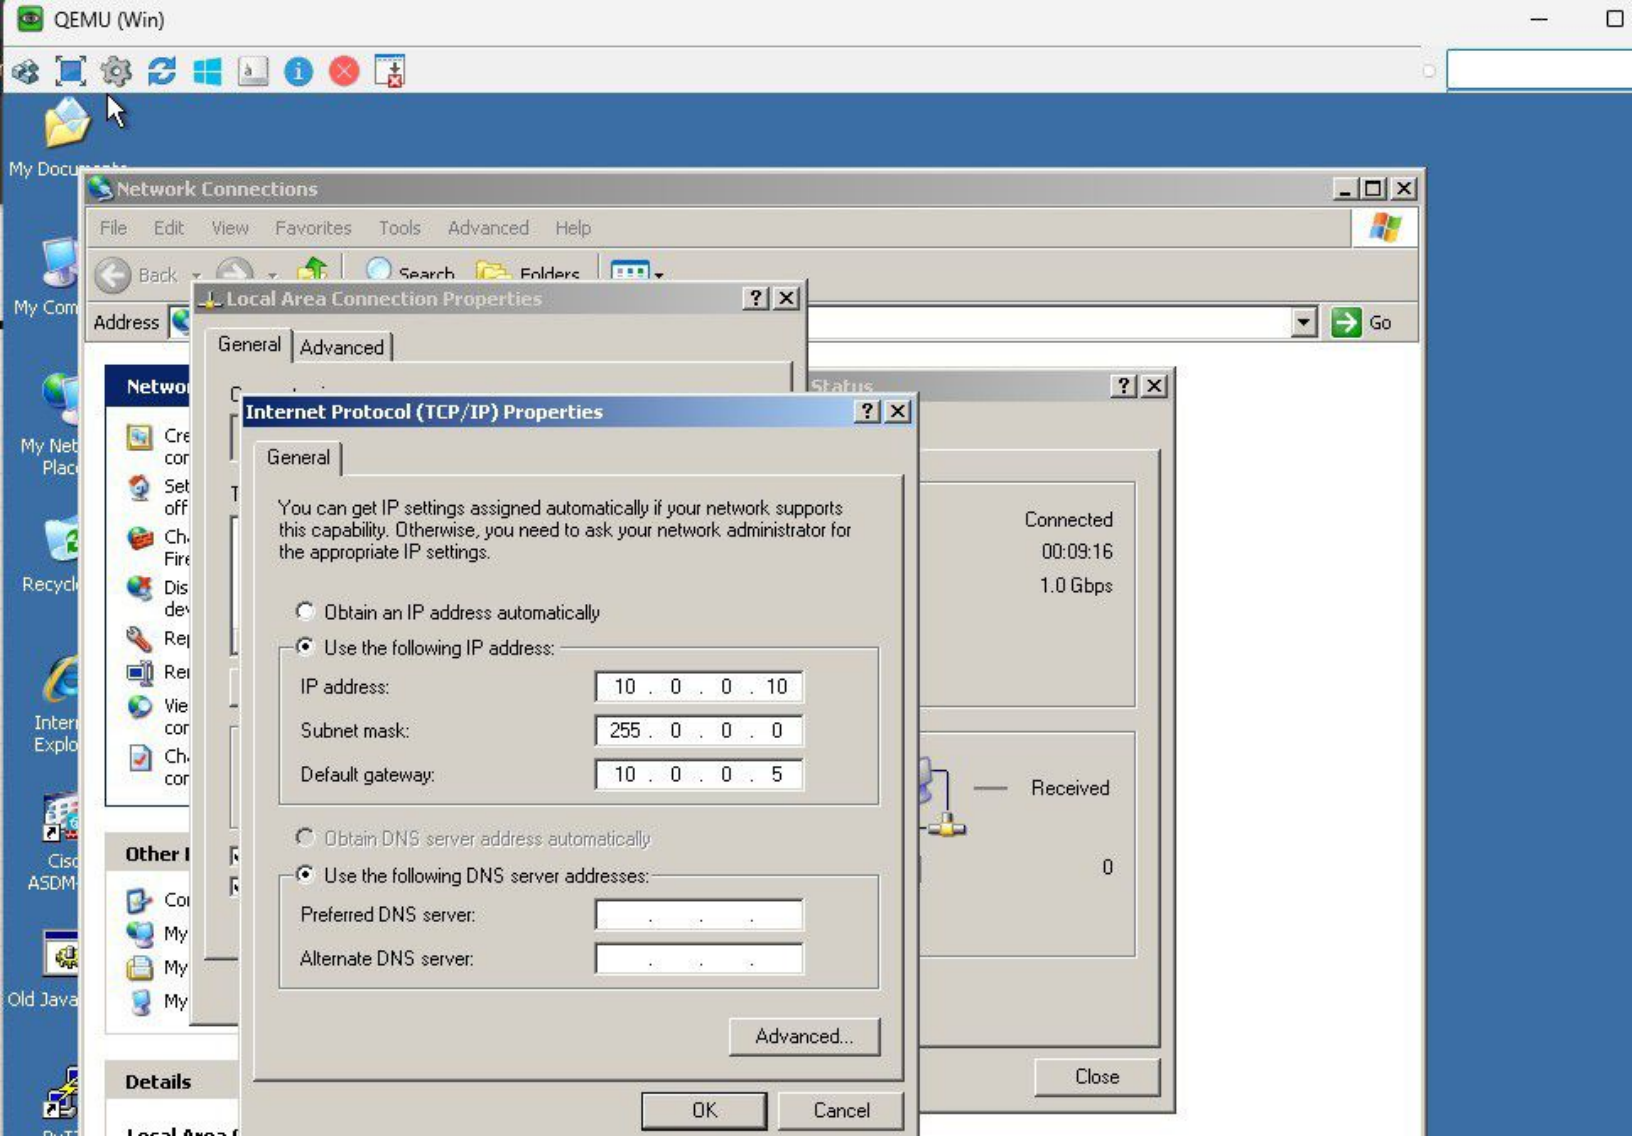

R2

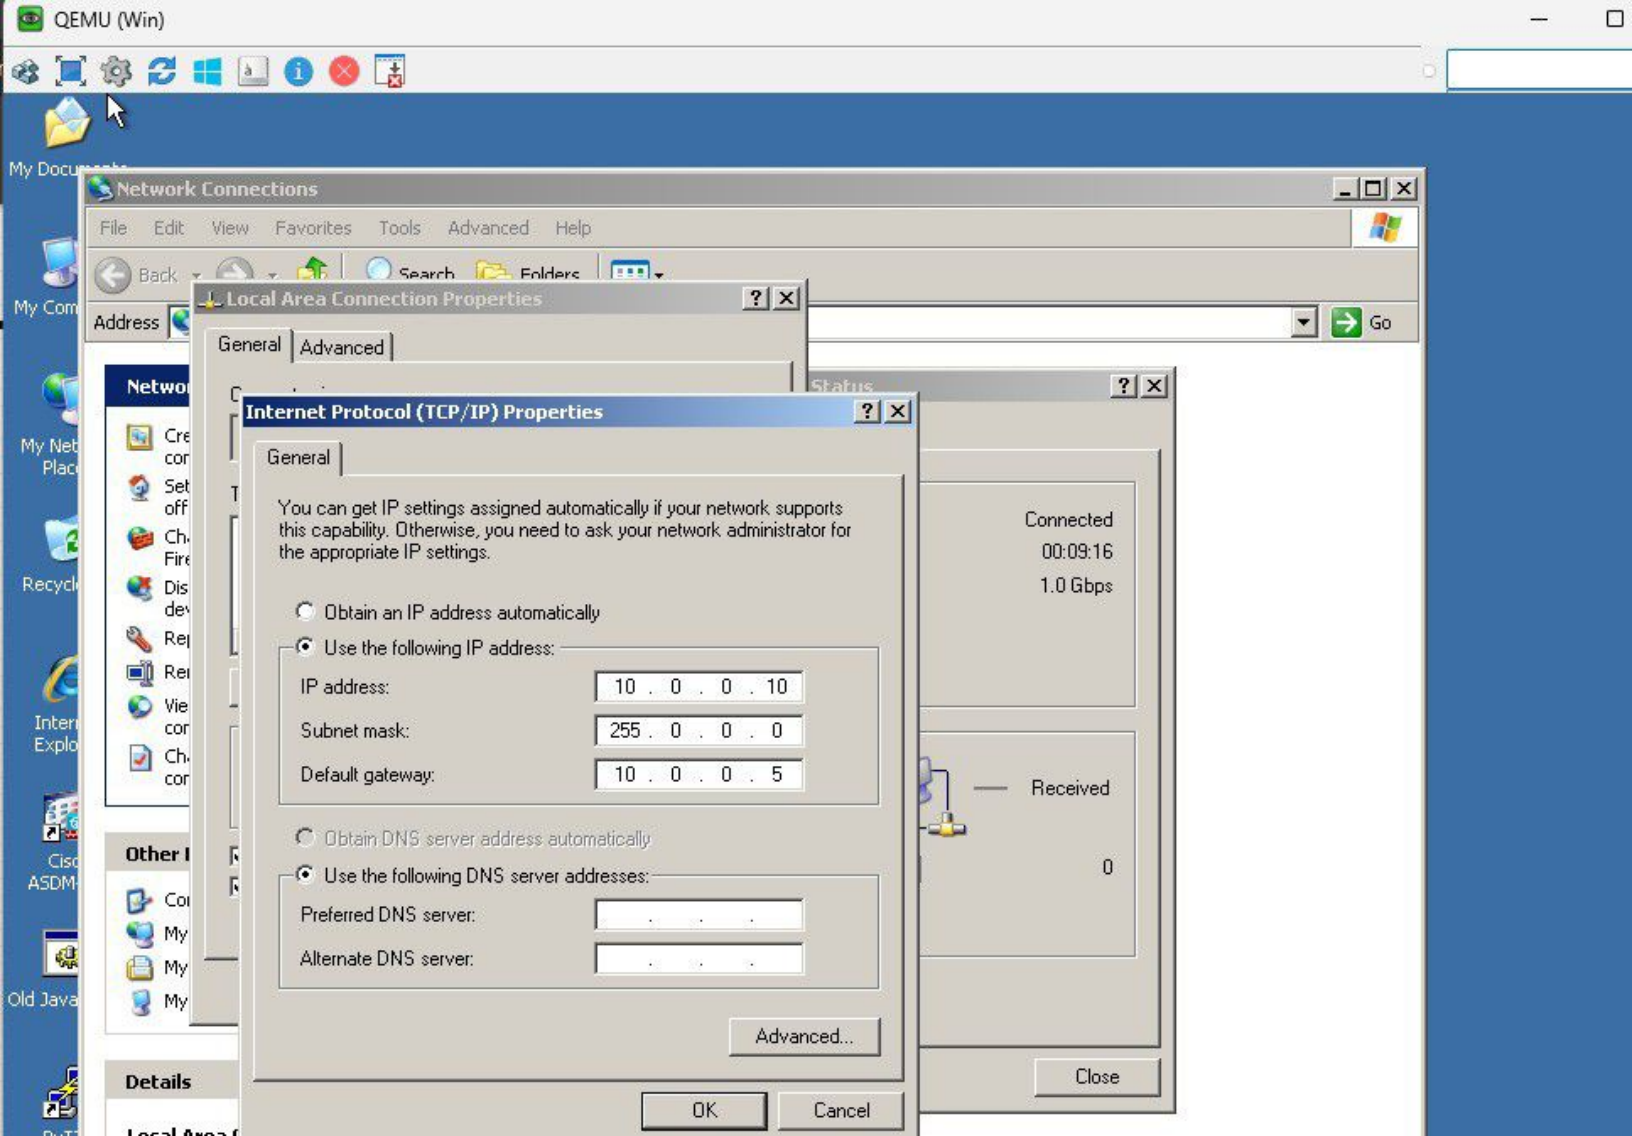

```
R2(config)#show standby
```

```
^
```

```
% Invalid input detected at '^' marker.
```

```
R2(config)#exit
```

```
R2#show
```

```
*Aug 17 06:38:45.923: %SYS-5-CONFIG_I: Configured from console by console
```

```
R2#show standby
```

```
Ethernet0/0 - Group 1
```

```
State is Speak
```

```
Virtual IP address is 10.0.0.5
```

```
Active virtual MAC address is 0000.0c07.ac01
```

```
Local virtual MAC address is 0000.0c07.ac01 (vl default)
```

```
Hello time 3 sec, hold time 10 sec
```

```
Next hello sent in 2.272 secs
```

```
Preemption disabled
```

```
Active router is 10.0.0.1, priority 100 (expires in 8.800 sec)
```

```
Standby router is unknown
```

```
Priority 100 (default 100)
```

```
Group name is "hsrp-Et0/0-1" (default)
```

```
R2#
```

```
*Aug 17 06:39:00.759: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Speak -> Standby
```

```
R2#
```

Before Enabling
Preempt

```
*Aug 17 06:42:45.096: %LINEPROTO-5-UPDOWN: Line protocol on Interface  
0, changed state to up
```

```
R1(config-if)#exit
```

```
R1(config)#exit
```

```
R1#
```

```
*Aug 17 06:42:49.062: %SYS-5-CONFIG_I: Configured from console by con
```

```
R1#show stna
```

```
*Aug 17 06:43:05.874: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Sp  
dby
```

```
R1#show standby
```

```
Ethernet0/0 - Group 1
```

```
State is Standby
```

```
4 state changes, last state change 00:00:03
```

```
Virtual IP address is 10.0.0.5
```

```
Active virtual MAC address is 0000.0c07.ac01
```

```
Local virtual MAC address is 0000.0c07.ac01 (v1 default)
```

```
Hello time 3 sec, hold time 10 sec
```

```
Next hello sent in 2.064 secs
```

```
Preemption enabled
```

```
Active router is 10.0.0.2, priority 100 (expires in 9.616 sec)
```


```
Standby router is local
```

```
Priority 100 (default 100)
```

```
Group name is "hsrp-Et0/0-1" (default)
```

```
R1#
```

After Enabling preempt

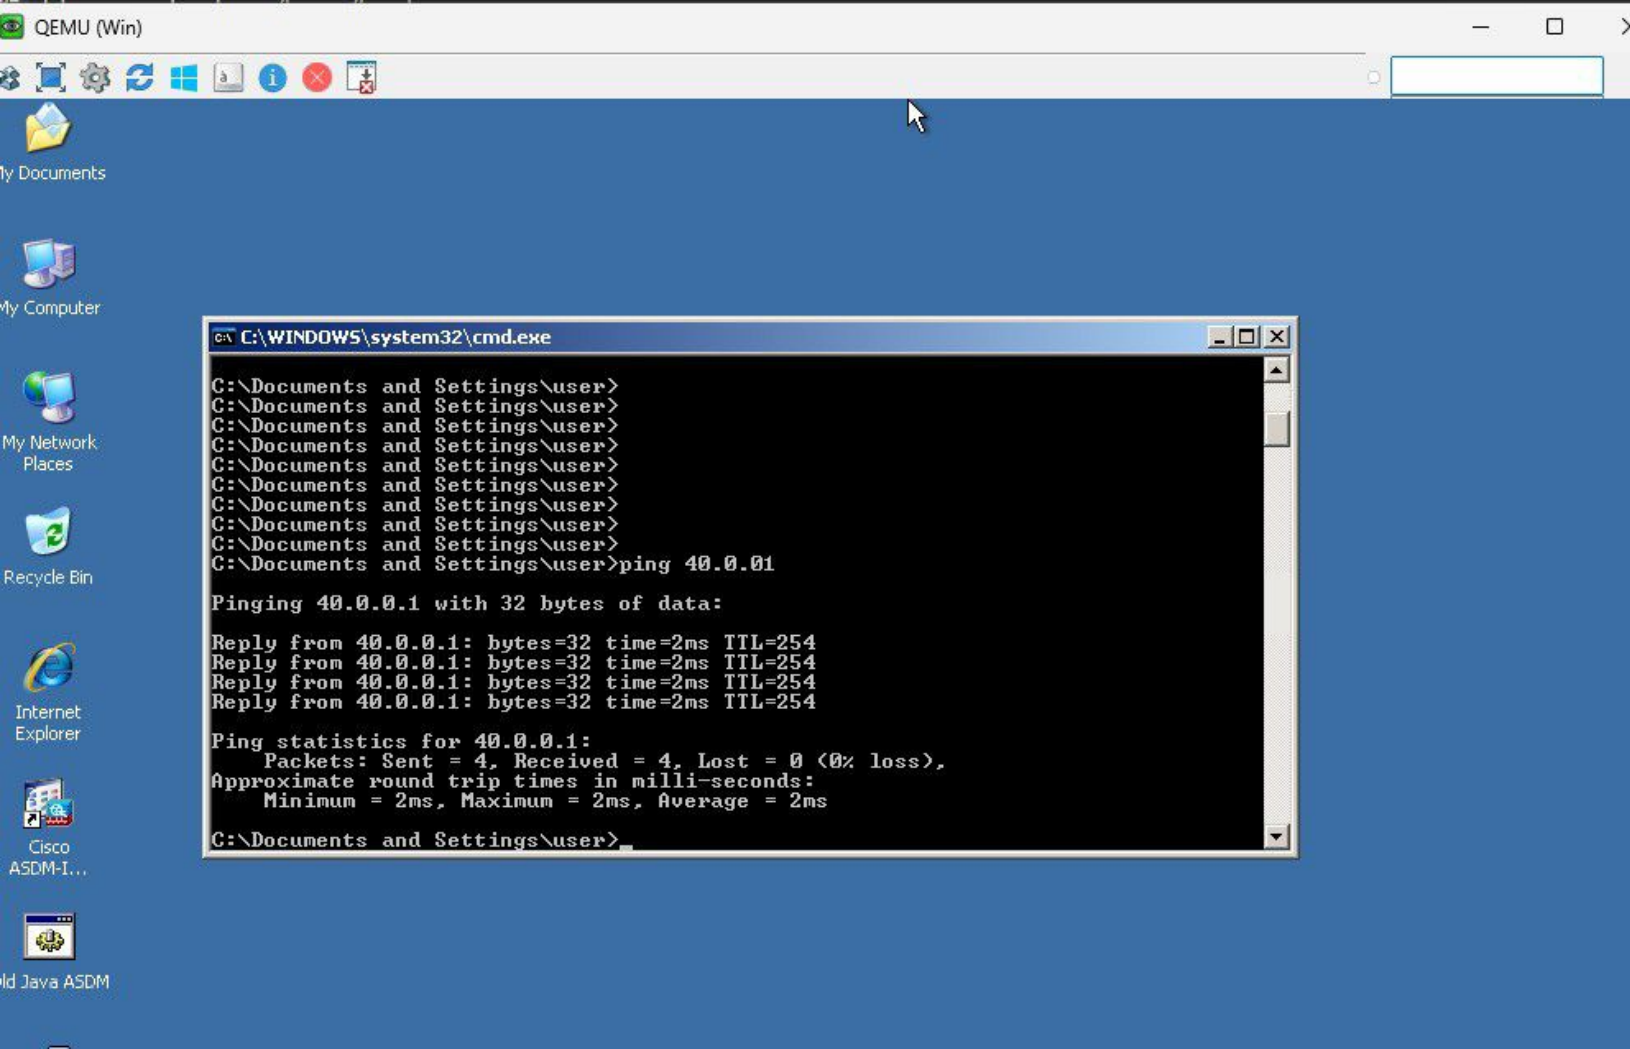

Enabling HSRP Tracking

```
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#
R2(config-if)#int e0/0
R2(config-if)#standby 1 track 1 decreament 30
                                     ^
% Invalid input detected at '^' marker.

R2(config-if)#standby 1 track 1 decrement 30
R2(config-if)#exit
R2(config)#track 1 int e0/1
% Incomplete command.

R2(config)#track 1 int e0/1 line-protocol
R2(config-track)#
```

```
R2(config)#track 1 int e0/1 line-protocol
R2(config-track)#
R2(config-track)#
R2(config-track)#
R2(config-track)#exit
R2(config)#exit
R2#show
*Aug 17 06:48:24.438: %SYS-5-CONFIG_I: Configured from console by console
R2#show standby
Ethernet0/0 - Group 1
  State is Active
    2 state changes, last state change 00:06:14
  Virtual IP address is 10.0.0.5
  Active virtual MAC address is 0000.0c07.ac01
    Local virtual MAC address is 0000.0c07.ac01 (v1 default)
  Hello time 3 sec, hold time 10 sec
    Next hello sent in 1.184 secs
  Preemption enabled
  Active router is local
  Standby router is 10.0.0.1, priority 100 (expires in 10.224 sec)
  Priority 100 (default 100)
    Track object 1 state Up decrement 30
  Group name is "hsrp-Et0/0-1" (default)
```