


Run # - LDO Performance Analysis

VERDICT
GOOD

KEY METRICS

Best PSRR -89.9 dB at 1149 Hz	Worst PSRR -38.0 dB at 45 Hz	Average PSRR -56.9 dB across sweep	NORMAL 84 100% of sweep	WARNING 0 0% of sweep	CRITICAL 0 0% of sweep
--	---	---	--------------------------------------	------------------------------------	-------------------------------------

PSRR VS FREQUENCY SWEEP

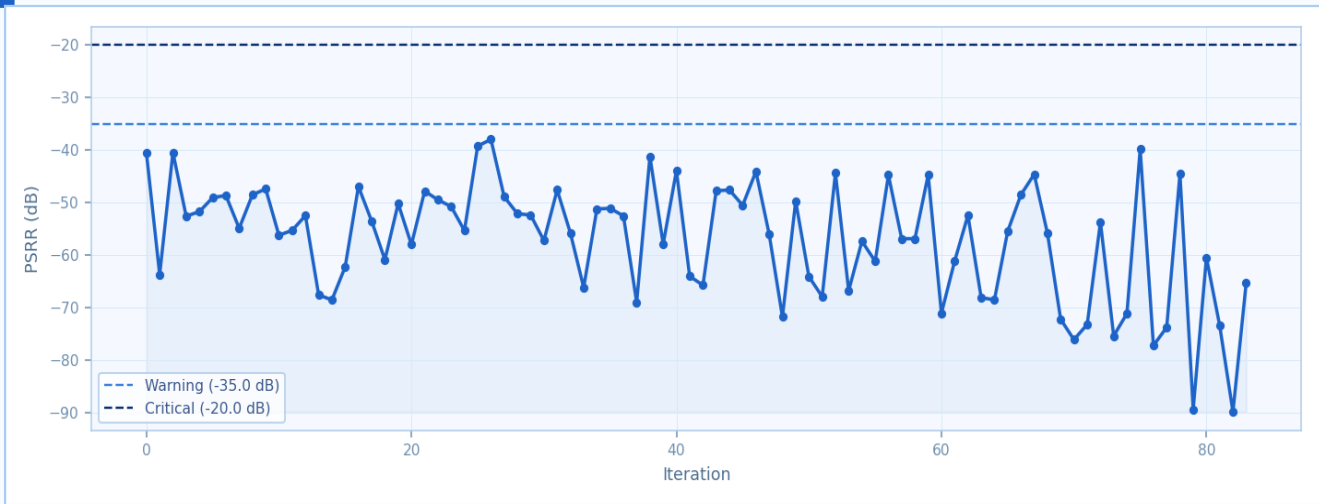

SEVERITY BREAKDOWN

NORMAL	100%	84 (100.0%)
WARNING		0 (0.0%)
CRITICAL		0 (0.0%)

OVERALL ASSESSMENT

CIRCUIT HEALTH VERDICT

GOOD

The circuit demonstrates strong ripple rejection across the sweep. Performance is within specification and suitable for mixed-signal and audio applications.


RECOMMENDATIONS FOR IMPROVEMENT

01

Reduce source ripple amplitude

Test used 100 mV ripple. An LC pre-filter before the regulator reduces input ripple, improving effective system PSRR across all frequencies.

SEVERITY DISTRIBUTION

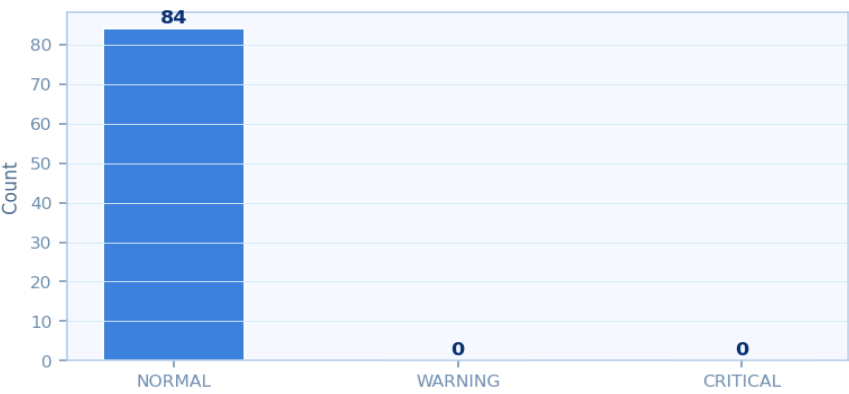

PSRR VALUE DISTRIBUTION

