


Stock Checking

The RFID Stock Counting process utilizes fixed RFID readers and antennas installed throughout the warehouse, integrated with the VNA vehicle and middleware system, to automatically detect, verify, and reconcile stock quantities in real time.

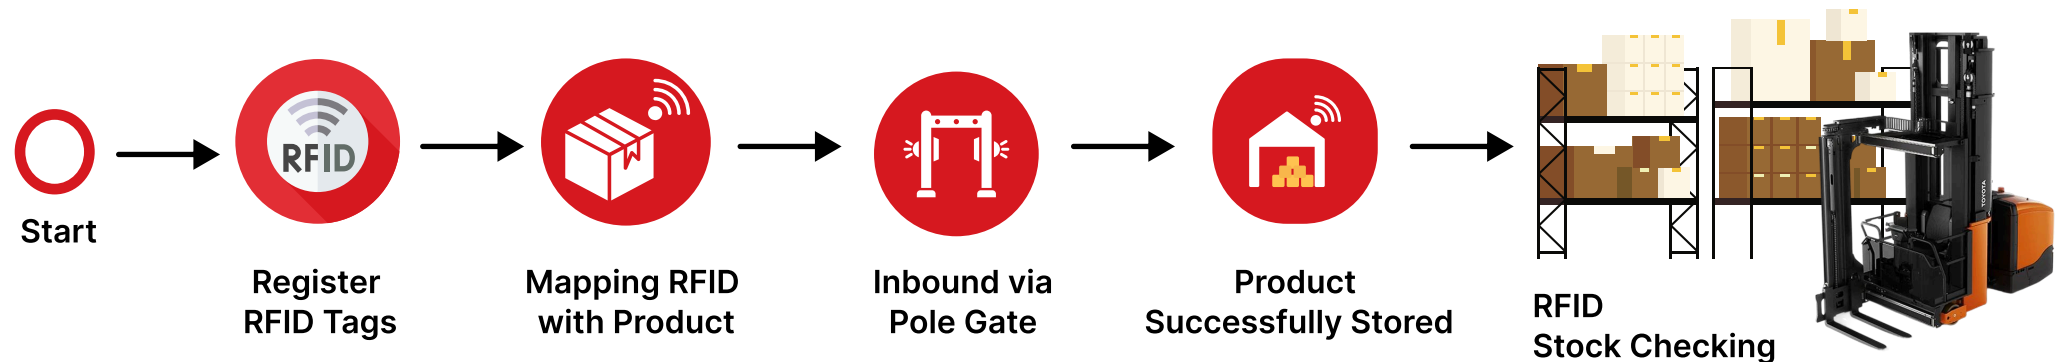

1. Preparation and System Initialization

1. Mount RFID Fixed Readers and Antennas:
Install RFID readers and antennas at destination VNA to enable full coverage for tag detection.
2. Connect Readers to Middleware System:
Ensure all RFID VNA devices are connected to the middleware and synchronized with the Warehouse Management System (WMS).
3. Initialize Stock Counting Session:
Start the stock counting process through the WMS or Middleware system, defining scope (by zone, location, or product group).

2. Stock Counting Operation

1. VNA Forklift Scanning Order:
The VNA vehicle, equipped with RFID scanning capability moves along designated aisles to read all RFID tags attached to pallets and products by application order.
2. RFID Data Capture:
Each detected tag transmits product information (Tag ID, Product Code, Quantity, Location, Lot/Batch, Timestamp) to the middleware system in real time.
3. Data Validation:
The middleware cross-checks the captured tag data against the master stock record in the WMS to verify accuracy and detect discrepancies.