

ALL BATTERIES RANGES

AGM VRLA



FIAMM AGM batteries have optimized internal gas recombination and are maintenance free without topping up. They are non-spillable, non-harazardous for transportation and 100% recyclable.

AGM VRLA SSLA



The SSLA battery range has been designed to cover a wide range of applications. The footprint of products are ideal for critical installations. Connection is simple on smaller models sizes thanks to the easy ‘fast-on’ terminals.

GEL VRLA



FIAMM GEL batteries are maintenance free and combine the benefits of a gelled electrolyte which provides a longer life and wider temperature operating range.

FLOODED



FIAMM vented batteries are available for several discharge profiles and for applications with unstable grid and deep discharge rate. Minimum maintenance and topping up are required.




FIAMM Asia Pacific PTE LTD
3B Toh Guan Road East #01-00
608833 Singapore - Republic of Singapore
Tel. +65 68676150
Fax +65 68626550

A Hitachi Group Company

infostandby.asia@fiamm.com
www.fiamm.com

f fiamm.batteries
t fiammbatteries
y youtube.com/user/FIAMMvideo

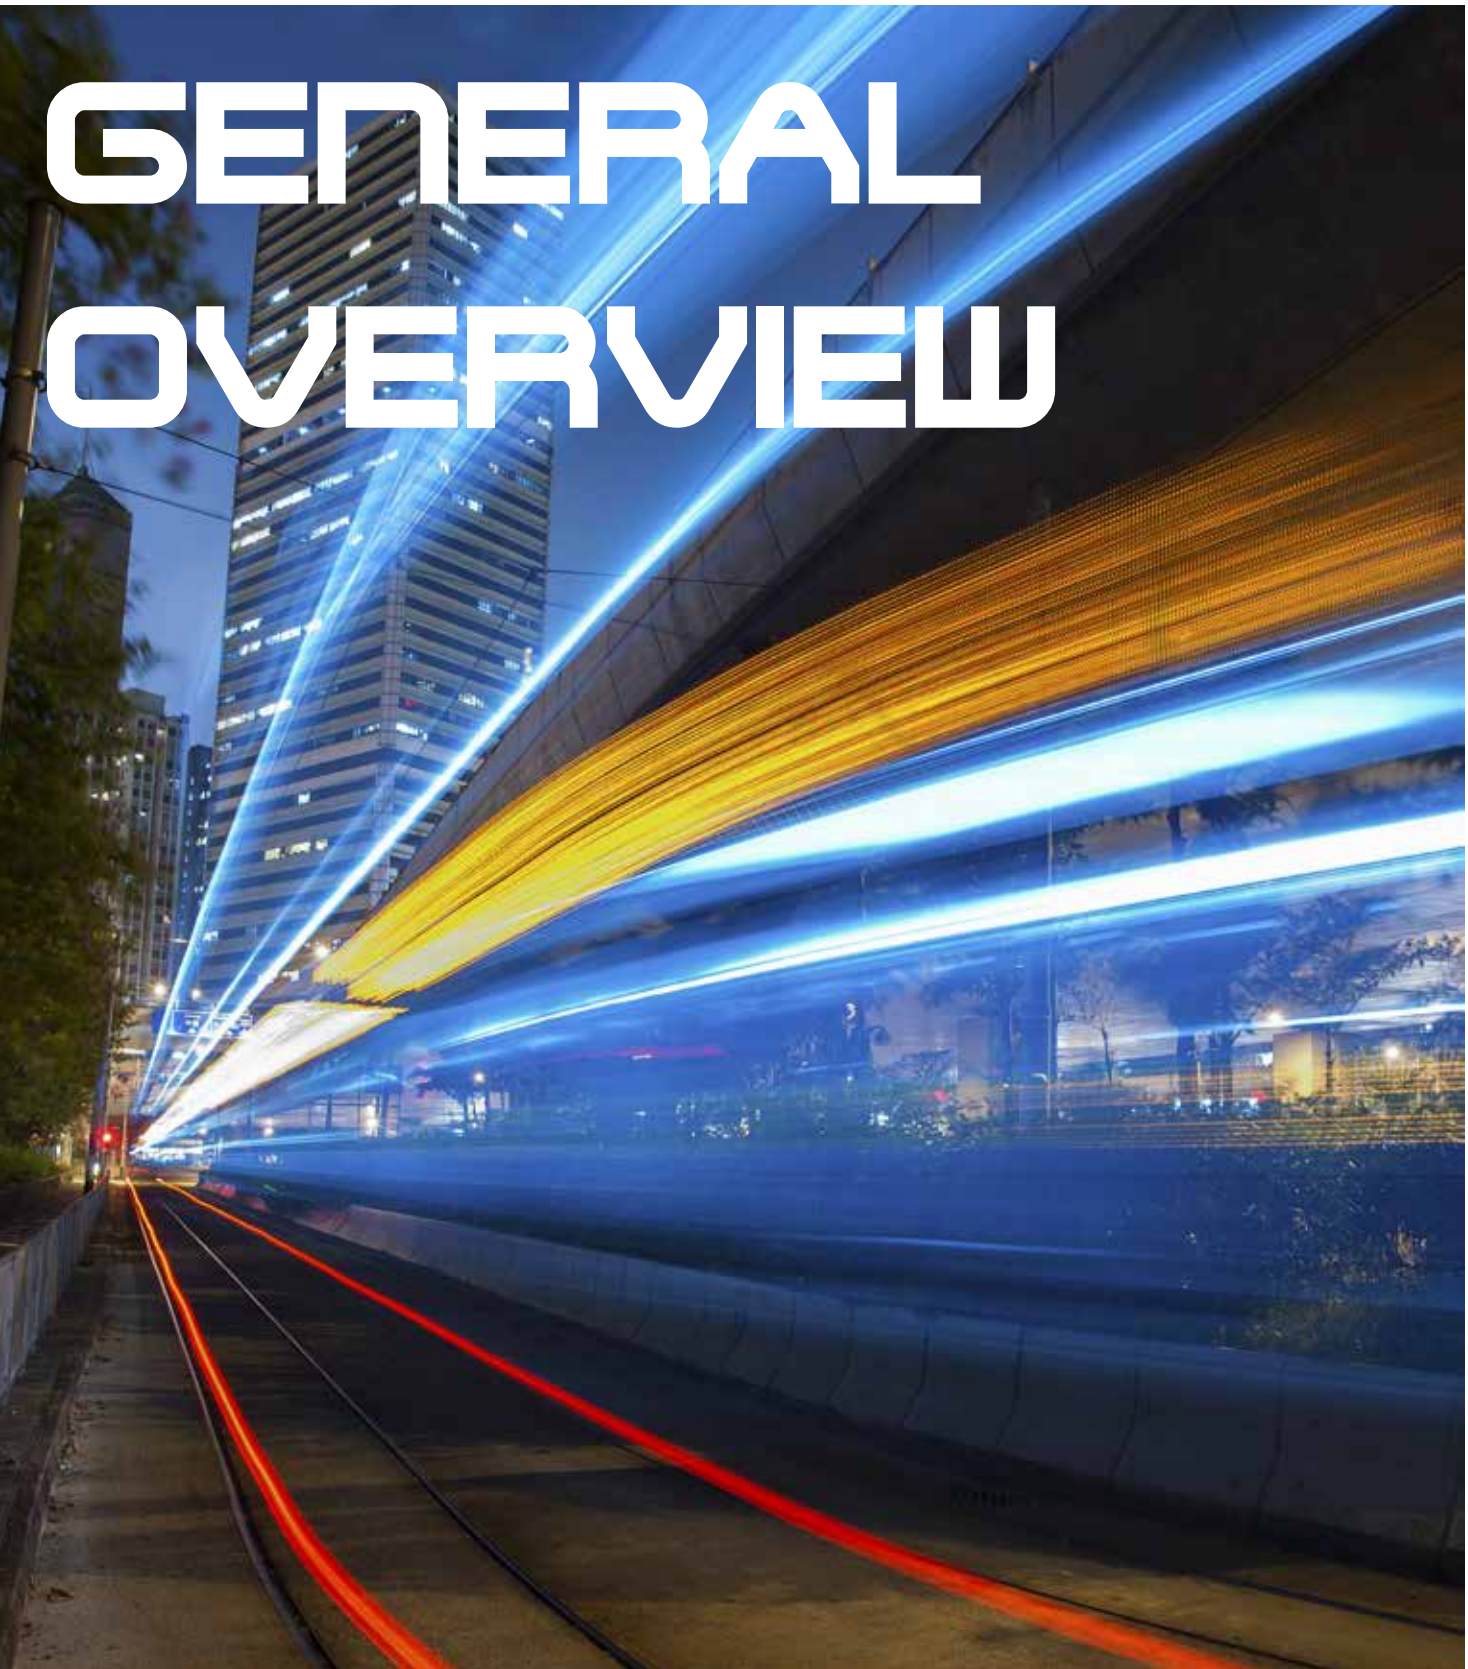

Reserve Power Solutions

+ FIAMM.COM



LEAD ACID
BATTERIES COLOR
CODE

SSLA

GEL

AGM

VENT



Renewable
Energy



Light
Traction



Leisure



Security System &
Emergency Lighting



UPS & Data
Centre



Utilities &
Industry



Oil & Gas



Railway



Telecom



SP

Long Life 26 - 235 Ah



FG

Standard Commercial 1.2 - 70 Ah

FGH

High Rate 5 - 18 Ah

FGHL

FLB

High Rate and Long Life
100 - 700 Wpc



FIT

Front Terminal and Very Long Life 40 - 195 Ah

SLA

Top Terminal and Very Long Life 24 - 2000 Ah

SD-SDH

High Rate and Flat Plate 80 - 2320 Ah



SMG

GEL Tubular Plate OPzV 100 - 3640 Ah

LM

Tubular Plate OPzS 100 - 3500 Ah



SGL-SGH

Pure Lead Planté Plate GRoE 79 - 2860 Ah

FHT

High Temp, Front Terminal
95 - 180 Ah

DESIGN LIFE

SMG S

GEL Tubular Plate
265 - 4240 Ah

LM S

Vented Tubular Plate
150 - 5000 Ah

RES

Residential Energy Solution
6.2 - 12.5 kWh