


Component ablation under fixed Quijote LHS256 validation

a Quantitative ablation

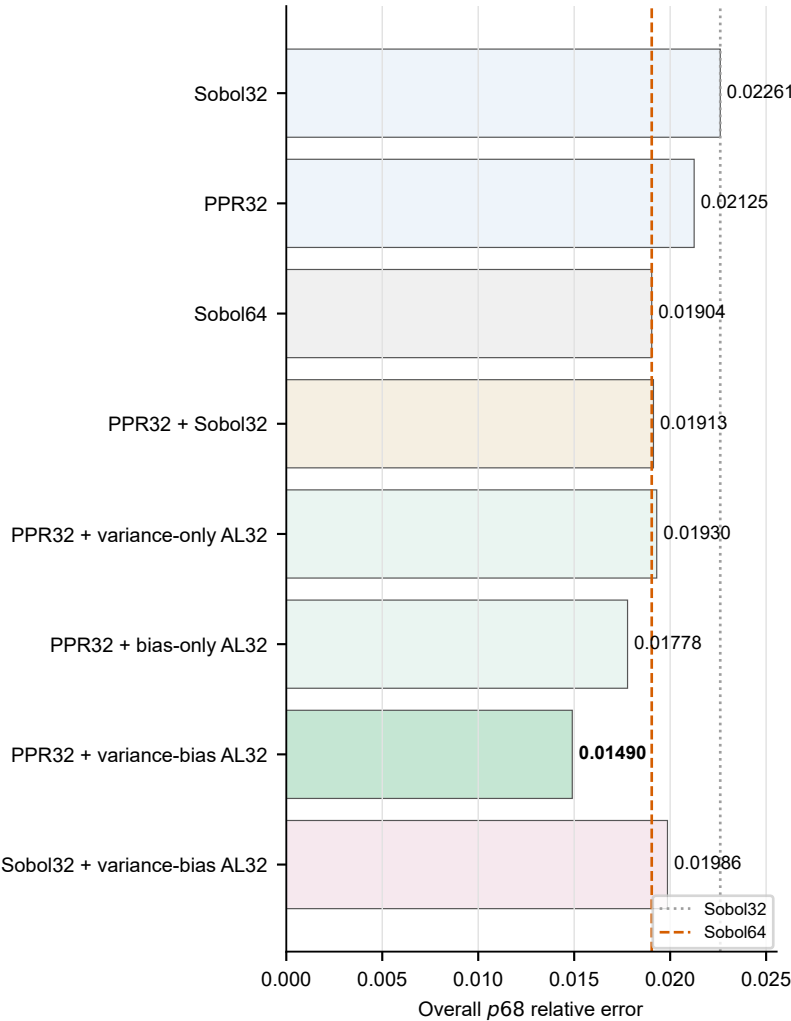

b Component contribution

Controlled contrast	Δp_{68}	Interpretation
Sobol32 baseline	reference	space-filling reference for 32-point designs
PPR cold start vs Sobol32	+6.01% vs Sobol32	bias-prior relaxation improves the initial design
Sobol64 baseline	reference	main 64-point space-filling reference
PPR plus neutral Sobol fill	-0.46% vs Sobol64	cold start alone does not explain the final gain
variance-only AL after PPR	-1.39% vs Sobol64	posterior variance alone is not sufficient
bias-only AL after PPR	+6.60% vs Sobol64	KUN bias proxy adds useful difficult-region signal
variance-bias AL after PPR	+21.74% vs Sobol64	lowest p68; variance and bias act as complementary signals
variance-bias AL after Sobol32	-4.29% vs Sobol64	initial-condition control; Sobol-seeded AL does not recover the gain

All entries use the same parameter box, residual-anchor target, $N_k = 475$ grid and LHS256 validation set. Positive Δp_{68} means lower error than the stated reference.