VTF-LED

IP66 Rated LED Industrial Luminaire

DATE:

PROJECT:

COMMENTS:

FEATURES

- Corrosion, flame and vandal resistant wet location luminaire.
- Ideal illumination for canopies, warehouses, schools, breezeways and service corridors.
- UV stabilized polycarbonate, liquid silicone perimeter gasket with memory retention.
- Frosted UV stabilized polycarbonate diffuser eliminates glare and provides even light distribution.
- Standard surface mount configuration.
- Available in 3000K, 4000K, or 5000K.
- Available in 100V-277V or 347V-480V input voltages.
- Up to 7,919 lumen output.

ORDERING INFORMATION   *VTFLED-4-AC-LO-WT30-AC*

1. SERIES	2. SIZE	3. OPERATION	4. OUTPUT	5. COLOR TEMPERATURE
VTFLED	4			
	4 4 Feet	**AC** AC Only **EM** Ni-Cad Battery Backup	**LO** Low Output **HO** High Output	**WT30** 3000K **WT40** 4000K **WT50** 5000K

6. MOUNTING	7. OPTIONS
AC Aviation Cable **CH** Chain Hang Kit[1] **MT** Top Mount **PVT** Pivot Mount	**BLANK = NO OPTION** **SS** Stainless Steel Clips **TP** Tamperproof Screws

ORDERING NOTES
1. Adjustable Chain Hang Kit has a maximum length of 48".

LAMP OUTPUT

LAMP TYPE	LUMEN OUTPUT
LO-WT30	4744
LO-WT40	4874
LO-WT50	5041
HO-WT30	7594
HO-WT40	7726
HO-WT50	7919

ISOLITE ▪ WWW.ISOLITE.COM
ISOLITE HEADQUARTERS ▪ 800.888.5483 ▪ 31 WATERLOO AVENUE, BERWYN, PA 19312
ISOLITE WEST ▪ 800.799.5343 ▪ 3563 SUELDO SUITE M, SAN LUIS OBISPO, CA 93401

D-7.2.3.0-247 ▪ REV-11 ▪ 20241021
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.
CONTACT ISOLITE FOR UP TO DATE DETAILS.

SPECIFICATIONS

CONSTRUCTION

- Corrosion, flame and vandal resistant housing.
- 100% UV stabilized polycarbonate, liquid silicone perimeter gasket.
- The frosted UV stabilized polycarbonate diffuser.

OUTPUT

- **LO:** 4744 - 5041 lm
- **HO:** 7594 - 7919 lm
- **EM Mode:** 10W / 1440 lm

WEIGHT

- 9 lbs

TEMPERATURE RATING

- **AC Only:** -40°F to 104°F (-20°C to 40°C)
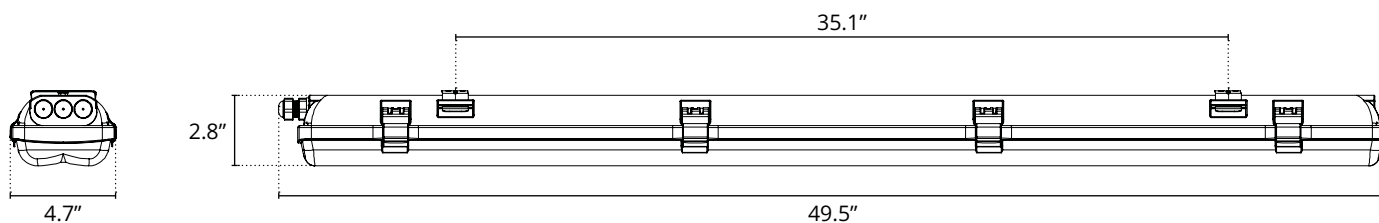- **EM Backup:** 32°F to 104°F (0°C to 40°C)

APPROVALS

- IK05
- IP66
- Title 20
- Title 24
- DLC
- ETL
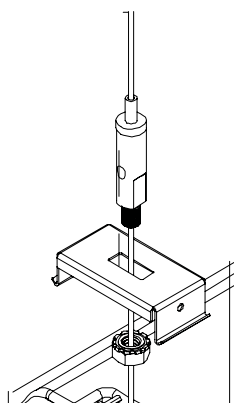- CSA
- RoHS Compliant
- BAA Compliant

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website.
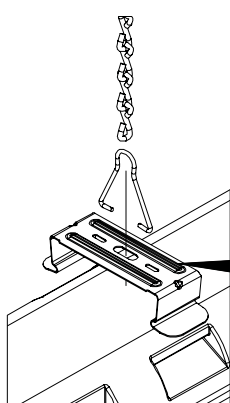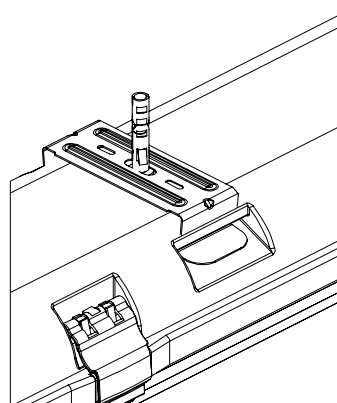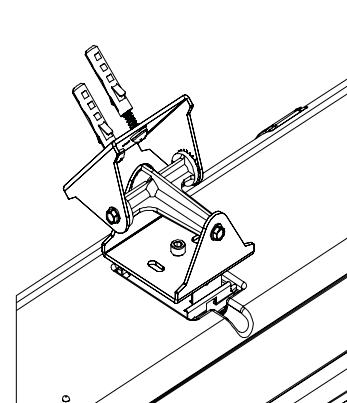
DIMENSIONS

35.1"
2.8"
4.7"
49.5"

MOUNTING OPTIONS

Aviation Cable

Chain Hang Kit

Top Mount

Pivot Mount

ISOLITE ▪ WWW.ISOLITE.COM
ISOLITE HEADQUARTERS ▪ 800.888.5483 ▪ 31 WATERLOO AVENUE, BERWYN, PA 19312
ISOLITE WEST ▪ 800.799.5343 ▪ 3563 SUELDO SUITE M, SAN LUIS OBISPO, CA 93401

D-7.2.3.0-247 ▪ REV-11 ▪ 20241021
SPECIFICATIONS AND DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTIFICATION.
CONTACT ISOLITE FOR UP TO DATE DETAILS.