
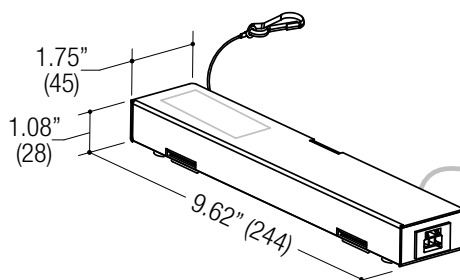
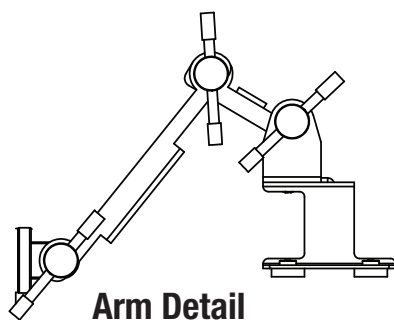


PROJECT

TYPE

CATALOG NUMBER

Measurements in () are metric equivalents.

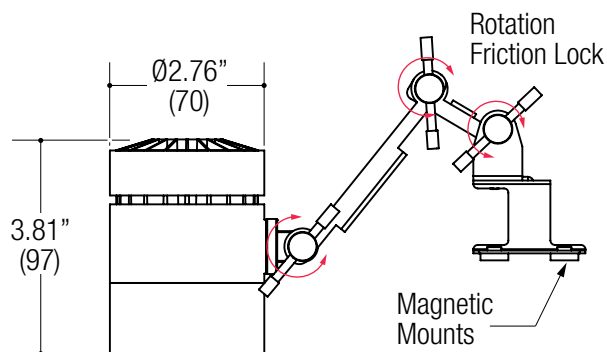

Application View

Specifications

SPOTLIGHT

- 2.76" diameter cylinder
- 125° x 125° arm articulation - Friction lock
- 90° x 90° head rotation - Friction lock
- Die-cast aluminum optical housing
- Articulating arm allows for greater aiming
- Powder coat finish

LED SOURCE

- **CREE**
- Field-replaceable integral LED module
- Field-changeable optic
- Easy access via front ring snap-in catch action
- Accepts UP TO 3 optical accessories

ELECTRICAL

- Field-replaceable LED driver
- Dimmable

MOUNTING

- Side channel magnetic mount
- Designed for ENK, EF4 channel / rail mount

LABELS


- Suitable for damp location

5 YEAR WARRANTY
Limited



MAGNETIC MOUNT

ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	DRIVER	FINISH
EF411B	08C 08W LED / 816 lm	8027 80CRI / 2700K	N Narrow 13°	D1U Dimming Forward/Reverse Phase (@ 120V only)	BB Black
	13C 13W LED / 1101 lm	8030 80CRI / 3000K	M Medium 25°		WW White
	19C 19W LED / 1495 lm	8035 80CRI / 3500K	W Wide 35°	Universal Voltage Input	
		8040 80CRI / 4000K			
		9227 92CRI / 2700K	TIR optics		
		9230 92CRI / 3000K			
		9235 92CRI / 3500K			
		9240 92CRI / 4000K			
EF400 Cylindrical Small Die Cast Aluminum Housing Variable Adjustment Arm	Delivered @ 92CRI / 3000K Narrow Beam 				Consult factory for custom colors. Minimum order required. Bezels only available in black or white.

Ordering Example: **EF411B-08C-9230-N-D1U-BB**

©2021 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev: 080521