OREX™—TITLE 24 EDITION
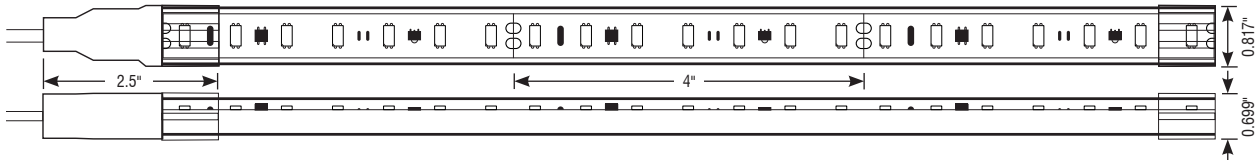
LINE VOLTAGE | 120HZ REFRESH RATE | 100FT RUNS

Fixture Type: _____

Project: _____

Location: _____

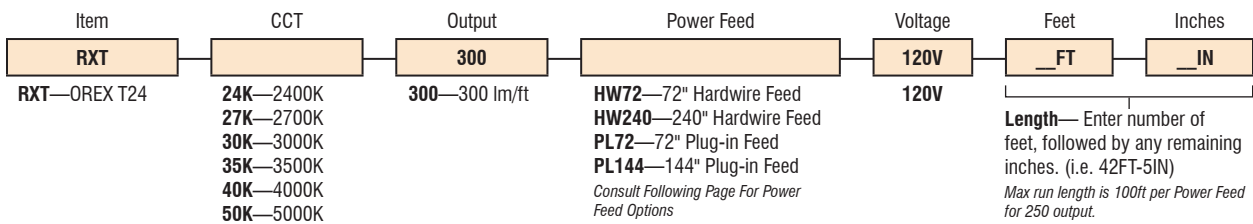| MODEL:	RXT-24K	RXT-27K	RXT-30K	RXT-35K	RXT-40K	RXT-50K
KELVIN	2400K	2700K	3000K	3500K	4000K	5000K
LUMENS	260 lm/ft	272 lm/ft	279 lm/ft	301 lm/ft	320 lm/ft	326 lm/ft

PRODUCT FEATURES

- Supports Title 24 JA8-2016 Compliance
- 120V Line Voltage
- Integral AC/DC Rectifier
- ELV Dimmable
- Hardwire or Plug-in Installation
- IP65
- Refresh Rate of 120Hz

SPECIFICATIONS

Model	RXT
Input Voltage	120 VAC
Watts per Foot	4W/ft
Beam Spread	120º
Max Run Length	100ft per Power Feed
Productions Intervals	4" (101.6mm)
End Cap Dimensions	0.817" (20.75mm) × 0.699" (17mm) × 2.5" (63.5mm)
Orex Dimensions	0.68" (17.3mm) × 0.53" (13.5mm)
CRI	90+
Diode	3056
Dimming Options	ELV
Temp Range	-4ºF (-20ºC) to 104ºF (40ºC)

ORDERING INFORMATION

Example: RXT-24K-300-HW72-120V-42FT-5IN

Item	CCT	Output	Power Feed	Voltage	Feet	Inches
RXT		**300**		**120V**	**__FT**	**__IN**
RXT—OREX T24	**24K**—2400K	**300**—300 lm/ft	**HW72**—72" Hardwire Feed	120V	**Length**— Enter number of feet, followed by any remaining inches. (i.e. 42FT-5IN)	
	27K—2700K		**HW240**—240" Hardwire Feed			
	30K—3000K		**PL72**—72" Plug-in Feed			
	35K—3500K		**PL144**—144" Plug-in Feed		*Max run length is 100ft per Power Feed for 250 output.*	
	40K—4000K		*Consult Following Page For Power Feed Options*			
	50K—5000K					

Supports TITLE 24 JA8-2019 Compliance · RoHS COMPLIANT · ETL LISTED us · Wet Rated · Damp Rated
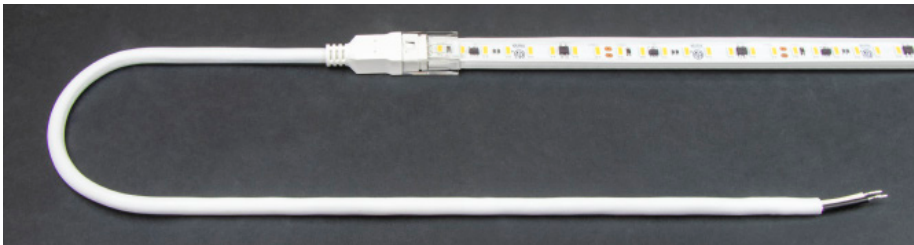
OREX™ T24 FACTORY POWER AND CONNECT OPTIONS

LINE VOLTAGE | 120HZ REFRESH RATE | TITLE 24 EDITION
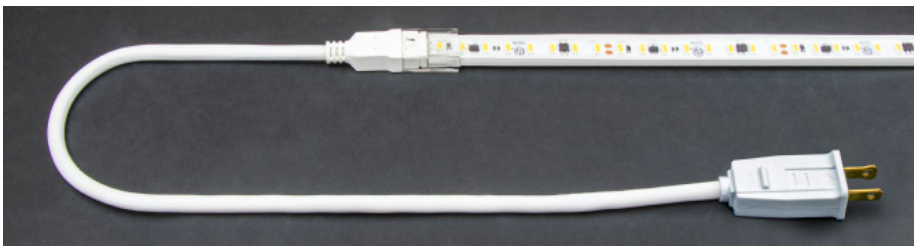
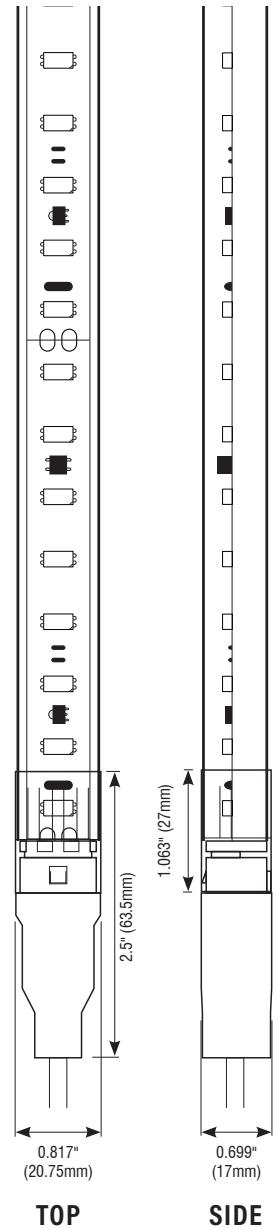Fixture Type: _____

Project: _____

Location: _____

FACTORY INSTALLED HARDWIRE POWER FEED
Specify 72" or 240" length in component builder on preceding page.

FACTORY INSTALLED PLUG-IN POWER FEED
Specify 72" or 144" length in component builder on preceding page.

FACTORY INSTALLED JUMP CABLES (CONSULT FACTORY FOR CONFIGURATION)
*Available in 6", 24", and 48" cable lengths.*

1.063" (27mm)

2.5" (63.5mm)

0.817" (20.75mm)

TOP

0.699" (17mm)

SIDE

OREX™ T24 MOUNTING OPTIONS

LINE VOLTAGE | LINEAR LED LIGHTING | TITLE 24 COMPLIANT

MOUNTING CLIPS (10 PER PACK)

SPECIFICATIONS

Model	RXT-CLP-F1-PAK-P
Material	Polycarbonate
Length	0.67" (17mm)
Width	0.85" (21.5mm)
Height	0.75" (19mm)

0.75"

0.85"
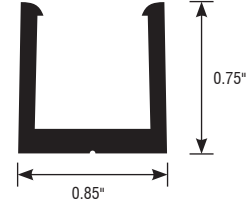
PLASTIC MOUNTING BASE

SPECIFICATIONS

Model	RXT-CH-PL-2M
Material	Polycarbonate
Length	78.74" (2m)
Width	0.79" (20mm)
Height	0.787" (20mm)

0.787"

0.79"