

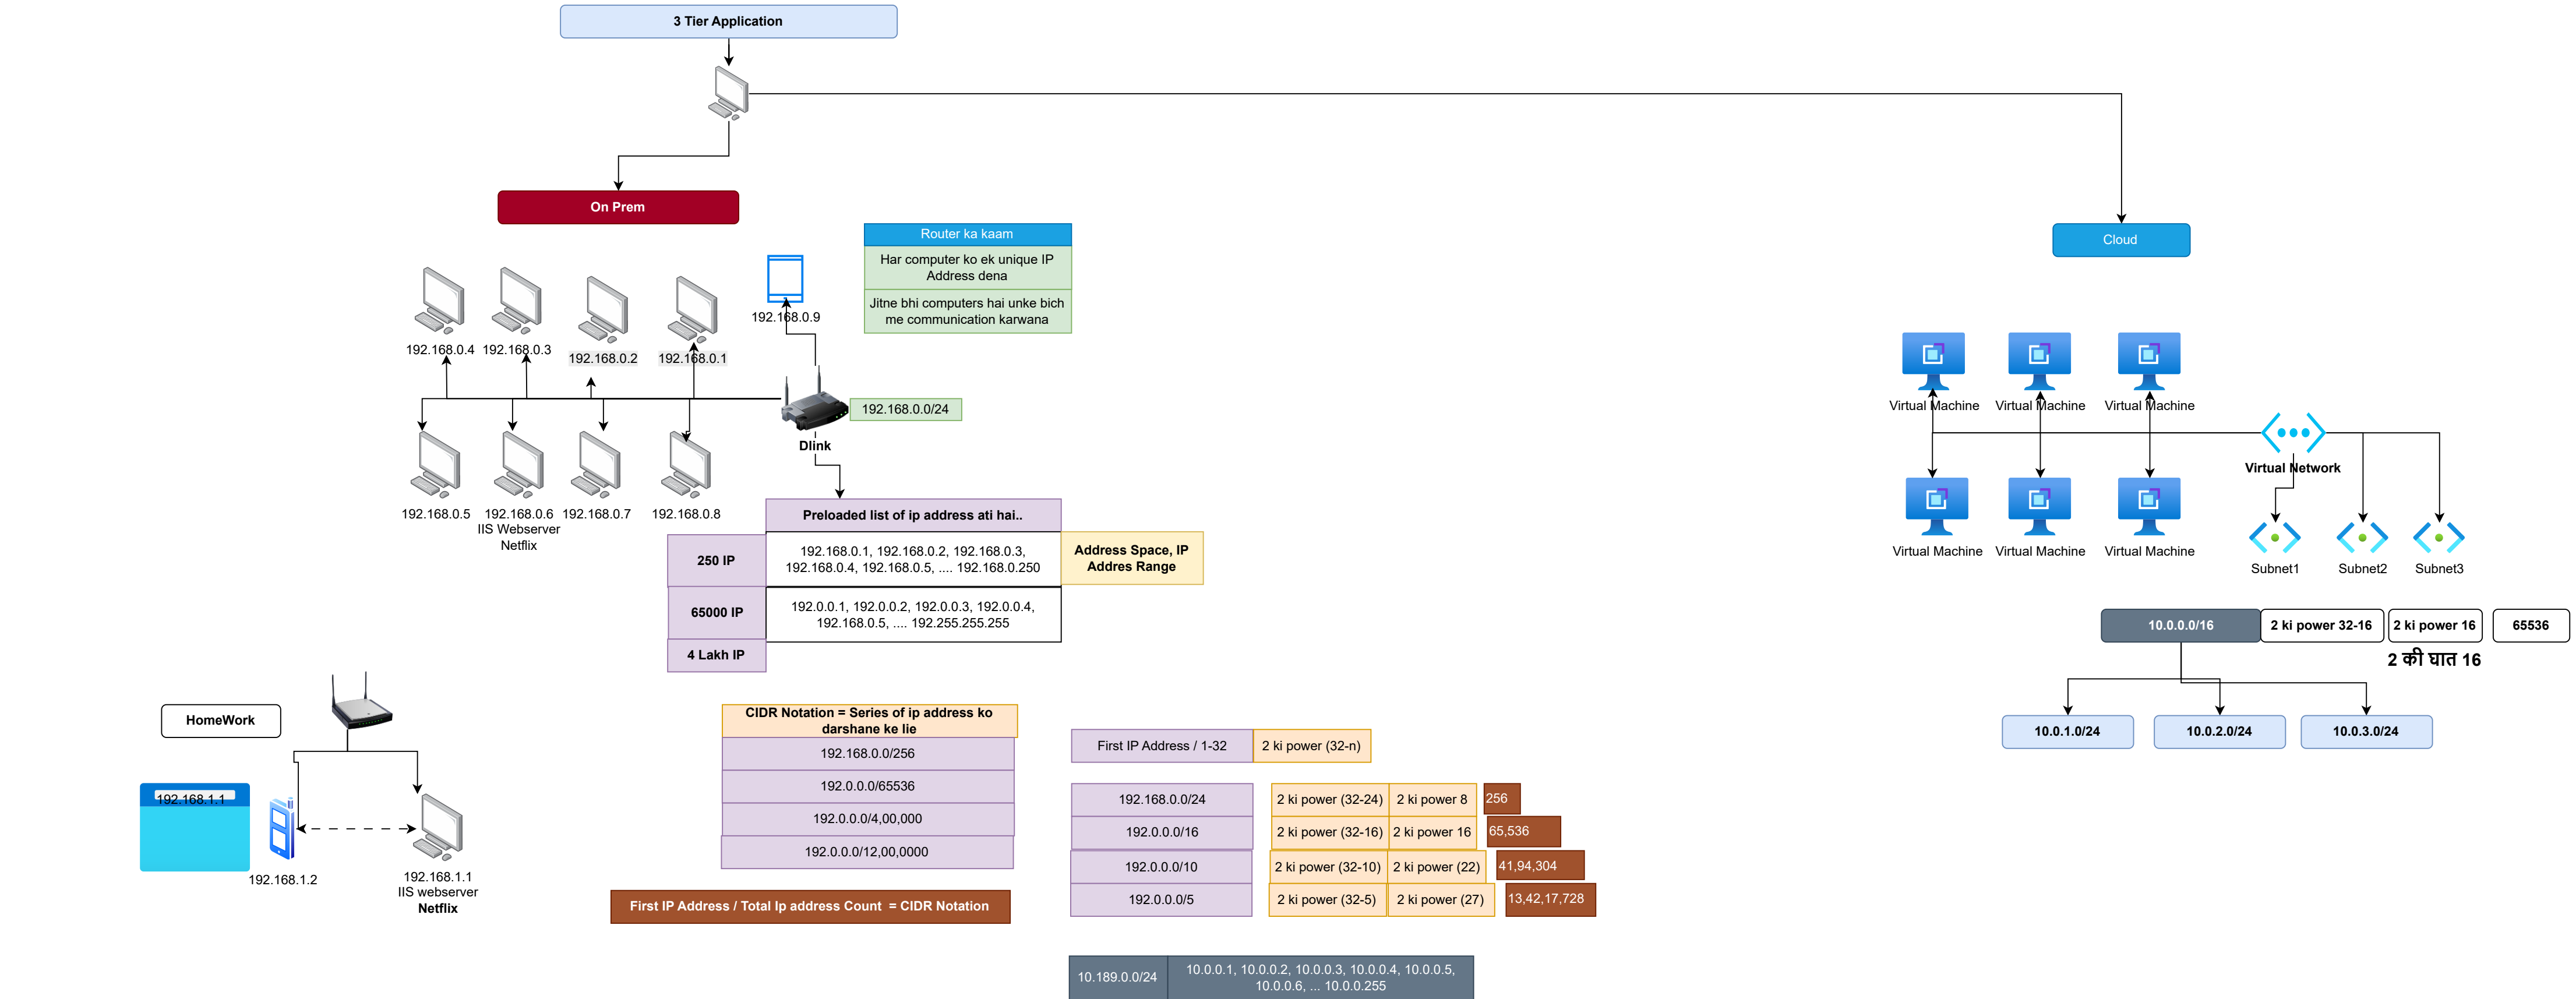


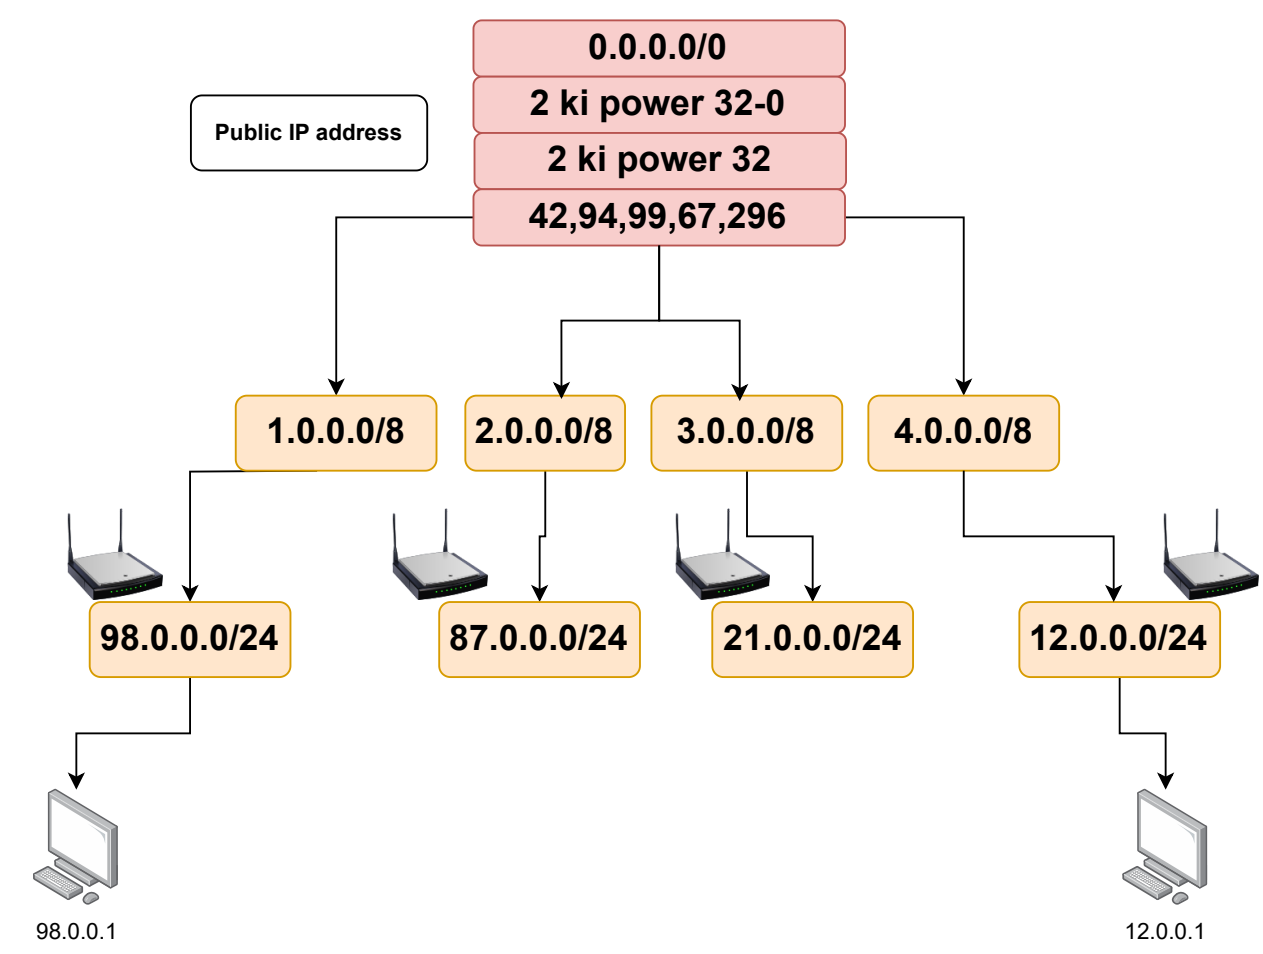

Router ka kaam IP dena aur devices ko apas me connect karna hota hai.
Bahut saare IPs ko short me likhne ke liye CIDR notation use hota hai: FirstIP/0-32 (jaise 192.168.1.0/24).

Ek router ke do kaam. Computers ko ip dena and computer ke bich me communication karwana. IP dena ke liye router ke pass bahut sare ip address hote hai. Vo bahut sare ip address likhne ke lie ek notation deta hai jisko bolte hai CIDR notation. CIDr notation ke andar hum log series ka first IP likhte hai aur /laga ke total IP likhte hai. lekin isme kuch akalmando ne... total ip likhne ke lie ek formula ijad kia hai jo 2 ki power 32-n hota hai... toh ab hum log bs first ip / 0-32

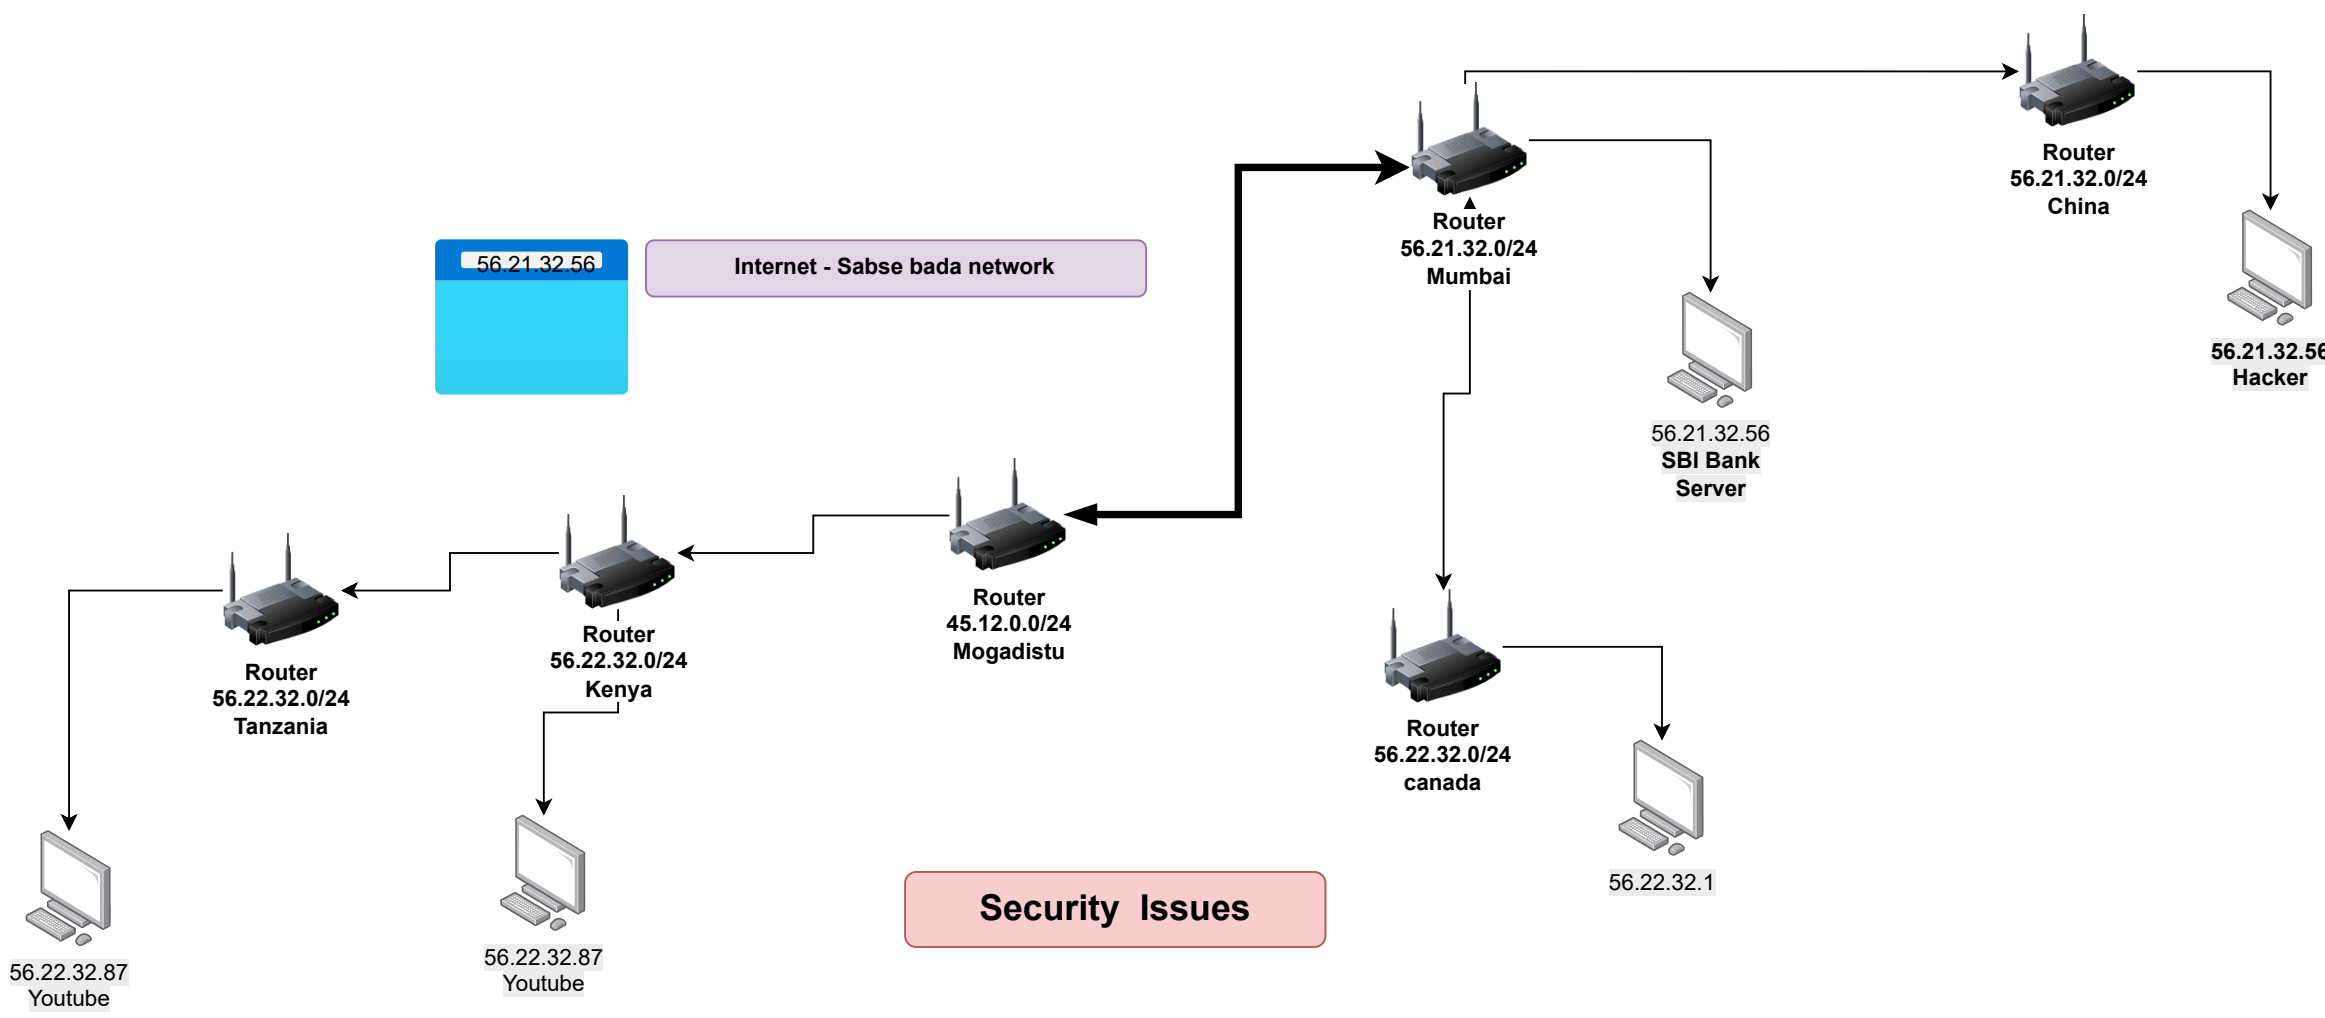

Internet = Network of Routers