HAI DUONG MARITIME CO., LTD

COMPANY PROFILE

Intra-Asia Dry Bulk Carriers · Self-Gear Tween-Deck Specialists

3	~11K	10+	2014
Vessels in Fleet	DWT per Vessel	Years Operating	Year Founded

Hai Phong, Vietnam · IMO Company No. 5885475

hdmaritime.com.vn

P&I: West of England (WOE) · Class: NK (Nippon Kaiji Kyokai) · ISM Compliant

ABOUT US

Built on Experience. Driven by Reliability.

Founded in 2014 and headquartered in Hai Phong, Vietnam, Hai Duong Maritime began with small vessels operating primarily in Southeast Asia. Over the past decade, the company has grown steadily into a reliable operator of ocean-going Tween-Decker bulkers serving major trade lanes across the Asia Pacific region.

Our fleet is classed by Nippon Kaiji Kyokai (NK) and operated in full compliance with the ISM Code. Every voyage is supported by an experienced chartering team and an in-house operations team, ensuring schedule reliability and cargo integrity on every fixture.

Our primary trade routes cover China, Japan, South Korea, Southeast Asia, India, Bangladesh, East Africa, and the Middle East. Principal cargoes include steel products, project equipment, and general dry bulk.

KEY STRENGTHS

ISM COMPLIANCE

Full Safety Management System implemented across the entire fleet.

NK CLASSED

All vessels certified by Nippon Kaiji Kyokai (NK), a leading classification society.

SELF-GEAR FLEET

Onboard cranes provide port-independent cargo handling capability at any terminal.

INTRA-ASIA FOCUS

Over 10 years of specialised experience across Asia Pacific and Indian Ocean trade lanes.

FLEET OVERVIEW

Our Fleet

Hai Duong Maritime operates three self-geared Tween-Decker mini-bulkers purpose-built for intra-Asia trade, with a Handysize vessel planned for 2027 to expand our commercial capacity across regional trade lanes.

MV HAI DUONG 09

TRADING

Handysize Mini-Bulker - Tween-Decker

DWT	BUILT	FLAG
11,000 DWT	2006	Panama
CRANES	**GRAIN CAP.**	**CLASS / ISM**
2 × 25T (combo 50T)	14,540 CBM	NK / Compliant

MV HAI DUONG 36

TRADING

Handysize Mini-Bulker - Tween-Decker

DWT	BUILT	FLAG
11,000 DWT	2005	Panama
CRANES	**GRAIN CAP.**	**CLASS / ISM**
2 × 26T (combo 52T)	15,444 CBM	NK / Compliant

MV HAI DUONG 68

TRADING

Handysize Mini-Bulker - Tween-Decker

DWT	BUILT	FLAG
11,000 DWT	2004	Kiribati
CRANES	**GRAIN CAP.**	**CLASS / ISM**
2 × 26T (combo 52T)	15,444 CBM	NK / Compliant

HANDYSIZE BULKER

PLANNED 2027

Handysize Bulker - Planned for 2027

DWT	BUILT	FLAG
~28,000 DWT	TBC	TBC
CRANES	**GRAIN CAP.**	**CLASS / ISM**
TBC	TBC	NK / TBC

TECHNICAL SPECIFICATIONS

Technical Specifications

MV HAI DUONG 09 Handysize Mini-Bulker · NK Class	
DEADWEIGHT	~11,000 MT
BUILD YEAR	2006
FLAG STATE	Panama
CLASSIFICATION	NK (Nippon Kaiji Kyokai)
VESSEL TYPE	Tween-Decker Bulker
HOLDS / HATCHES	2 / 2
GRAIN CAPACITY	14,540 CBM
CRANES	2 × 25T (combo 50T)
ISM CODE	Fully Compliant

MV HAI DUONG 36 & 68 Handysize Mini-Bulker · NK Class	
DEADWEIGHT	~11,000 MT
BUILD YEAR	2005 / 2004
FLAG STATE	Panama / Kiribati
CLASSIFICATION	NK (Nippon Kaiji Kyokai)
VESSEL TYPE	Tween-Decker Bulker
HOLDS / HATCHES	2 / 2
GRAIN CAPACITY	15,444 CBM
CRANES	2 × 26T (combo 52T)
ISM CODE	Fully Compliant

PRINCIPAL CARGO TYPES

Cargo Types Handled

- Steel Products & Coils
- Project Equipment
- General Dry Bulk
- Bagged Cargo
- Breakbulk Cargo
- Vehicles

TRADING AREA

Trading Area

Primary: Asia Pacific · Secondary: Indian Ocean, Middle East, East & South Africa

EAST ASIA

- China
- Japan
- South Korea

SOUTHEAST ASIA

- Vietnam
- Thailand
- Indonesia
- Philippines
- Singapore & Malaysia

SOUTH ASIA

- India
- Bangladesh
- Sri Lanka

MIDDLE EAST

- Persian Gulf
- UAE
- Saudi Arabia
- Oman

EAST & SOUTH AFRICA

- Tanzania
- Kenya
- Mozambique
- South Africa

INTRA-REGION

- Short Sea Routes
- Tramp Trading
- Project Cargo

SERVICES

What We Offer

1 Time Charter (TCT)

Flexible time charter trips for charterers seeking dedicated vessel deployment on Asia Pacific trade

2 Voyage Charter

Single-voyage contracts with full operational support from our experienced in-house chartering

3 Port-Independent Ops

Self-gear capability (onboard cranes) enables operations without shore-based cargo handling

4 Commercial Management

Full services: charter negotiations, freight invoicing, port disbursements, and voyage accounting.

CONTACT

Get in Touch

For chartering enquiries, fixture negotiations, and operational correspondence.

CHARTERING DESK

EMAIL
chartering@hdmaritime.com.vn

MR. LE MINH HAI
+84 902 091 096

WhatsApp / Zalo / WeChat: cafebiz

MR. TRAN ANH VIET KENNY CHEN
+84 982 824 130

WhatsApp / Zalo / WeChat / Viber / Kakao / Line

OPERATIONS DESK

EMAIL
ops@hdmaritime.com.vn

AVAILABILITY
24/7 round-the-clock response for vessel operations

CORPORATE OFFICE

REGISTERED ADDRESS
No. 186, Lot 9 (ext.)

Hai An Ward, Hai Phong

REPRESENTATIVE
7/F Khanh Hoi Building

Le Hong Phong, Hai Phong

IMO COMPANY NO.
5885475

P&I CLUB
West of England (WOE)

DEPARTMENT CONTACTS

Shared email: ops@hdmaritime.com.vn - Please state department in subject line

TECHNICAL

MR. NGUYEN THANH TUAN
+84 988 668 894
WhatsApp / Zalo available

SUPPLY & PROCUREMENT

MR. TRAN SY DUONG
+84 936 995 768
WhatsApp / Zalo available

CREWING

MR. TRINH VAN TRUONG
+84 947 010 786
WhatsApp / Zalo available

HAI DUONG MARITIME CO., LTD

Intra-Asia Dry Bulk Carrier Specialists Since 2014

hdmaritime.com.vn

IMO: 5885475

P&I: West of England (WOE)

Class: Nippon Kaiji Kyokai (NK)

ISM Code: Fully Compliant

TC DESCRIPTION

MV HAI DUONG 09

Self-geared Tween-Decker · NK Class · Built 2006



10,959 t	14,540 cbm	2 × 25 t	9.20 m
Summer DWT	Grain capacity	Cranes (comb. 50 t)	Summer draft

GENERAL

IMO NUMBER	**9342243**
FLAG	**Panama**
CLASS	**NK (Nippon Kaiji Kyokai)**
YEAR BUILT	**2006**
P&I CLUB	**West of England**
ISM	**Fully compliant**

DIMENSIONS & TONNAGE

DWT / GT / NT	**10,959 / 7,104 / 3,878**
LOA	**111.78 m**
BREADTH / DEPTH	**18.80 / 13.00 m**
SUMMER DRAFT	**9.20 m**

CARGO SPACES

TYPE	**Tween-decker, box-shaped holds**
HOLDS / HATCHES	**2 / 2**
GRAIN / BALE	**14,540 / 13,662 cbm**
HATCH NO.1	**25.90 × 12.60 m**
HATCH NO.2	**29.40 × 12.60 m**
HOLD CLEAR HT.	**5.90 m**
CLEAR HT. 'TWEEN	**4.40 m**
HATCH COVERS	**MacGregor · Tween: pontoon**

STRENGTH (UNIFORM LOAD)

TANK TOP	**15.00 t/m²**
2ND DECK	**3.50 t/m²**
HATCH COVERS	**1.29 t/m²**
UPPER DECK	**2.48 t/m²**

CARGO GEAR

CRANES	**2 × SWL 25 t × 26 m**
COMBINED	**SWL 50 t**
DERRICK	**1 × SWL 20 t × 19 m**
OUTREACH	**Crane 14 m · Derrick 8 m**

SPEED & CONSUMPTION (PER DAY)

	SPEED	LSFO	LSMGO
LADEN	**10.5 kn**	**10.0 MT**	**1.1 MT**
BALLAST	**11.0 kn**	**9.5 MT**	**1.1 MT**
PORT WORKING	-	-	**2.2 MT**
PORT IDLE	-	-	**1.1 MT**

All figures about. Fuel: LSFO 180 cst. Plus abt 4.0 MT LSMGO for manoeuvring / heating F.O. each port (one time in / out).
Speed / consumption basis good weather, not exceeding BFT 4 / Douglas sea state 3, no adverse current.
Forklift: max 39 t (incl. cargo) on tank top, 9 t on 2nd deck.

CHARTERING DESK
chartering@hdmaritime.com.vn
Le Minh Hai +84 902 091 096 · Kenny Chen +84 982 824 130

CURRENT POSITIONS
Scan for open tonnage
hdmaritime.com.vn/open-tonnage.html

All details given in good faith but without guarantee. Hold dimensions and limits: see cargo hold plan.


MV HAI DUONG 09

hdmaritime.com.vn


CARGO HOLD DIMENSIONS & LIMITATIONS - general cargo / project cargo

All dimensions in metres. Frame spacing 0.70 m in cargo area. Aft to the left, forward to the right. Drawing not to be used as a substitute for the ship's approved plans.


UPPER DECK - HATCH COVERS (max. 1.29 t/m²) · DECK (max. 2.48 t/m²)

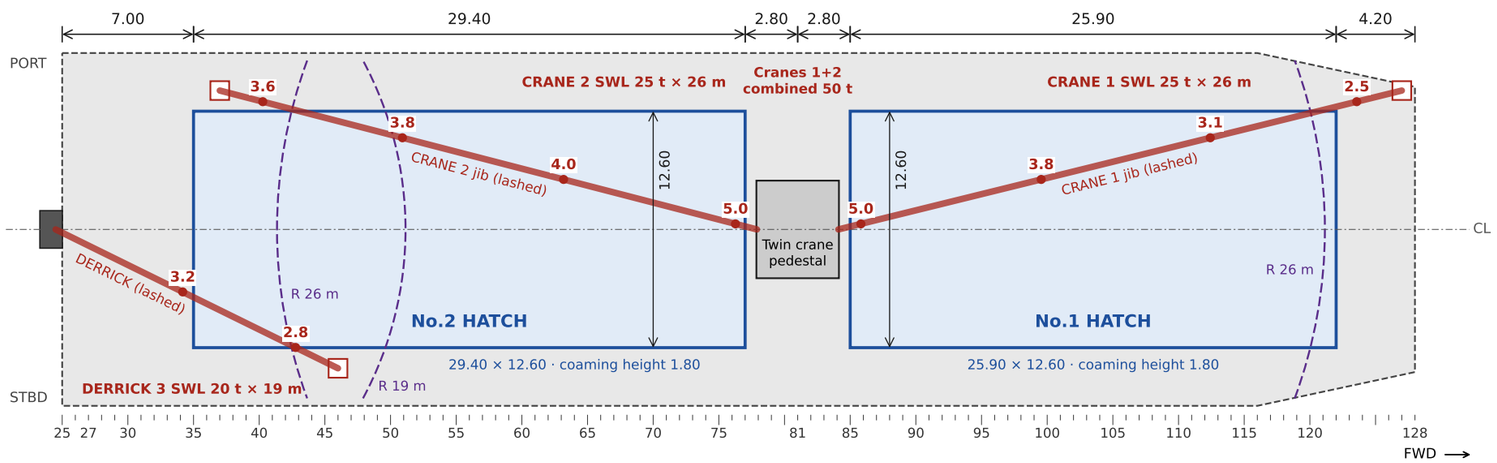

'TWEEN DECKS - 2nd DECK & PONTOON COVERS (max. 3.50 t/m²)

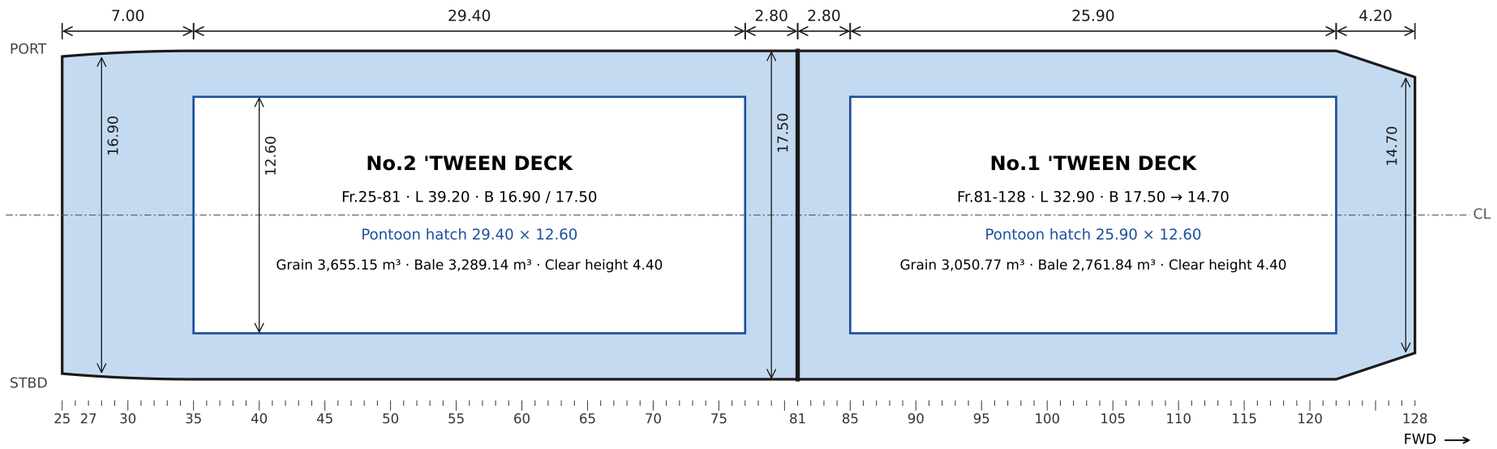


LOWER HOLDS - TANK TOP (max. 15.00 t/m²)

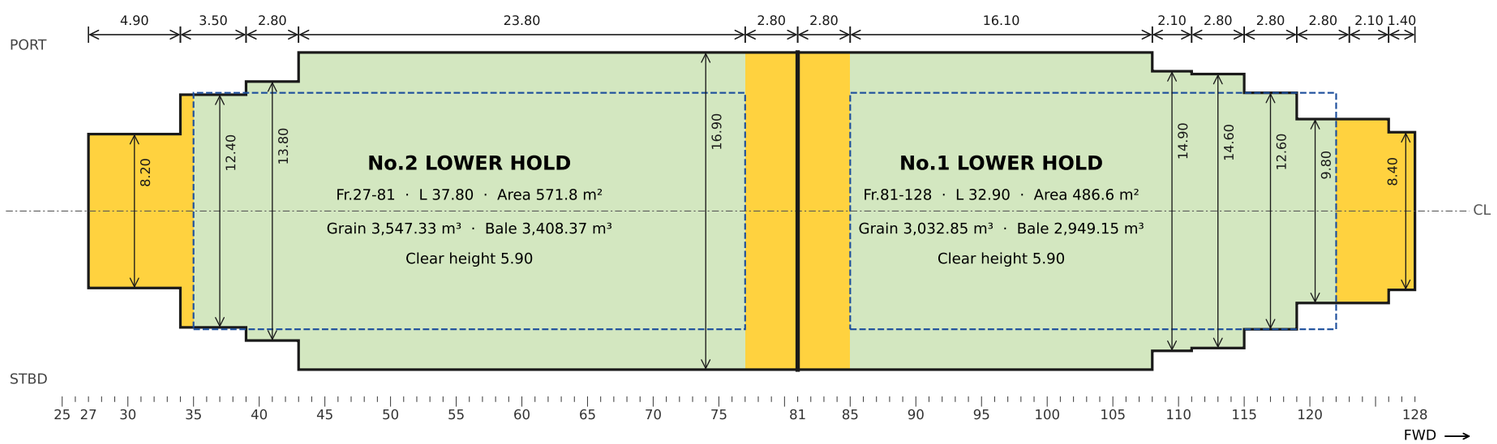

Lower hold under hatch square · Outside hatch square (forklift / pontoon stowage) · 'Tween deck · Hatch opening

MIDSHIP SECTION (looking forward)

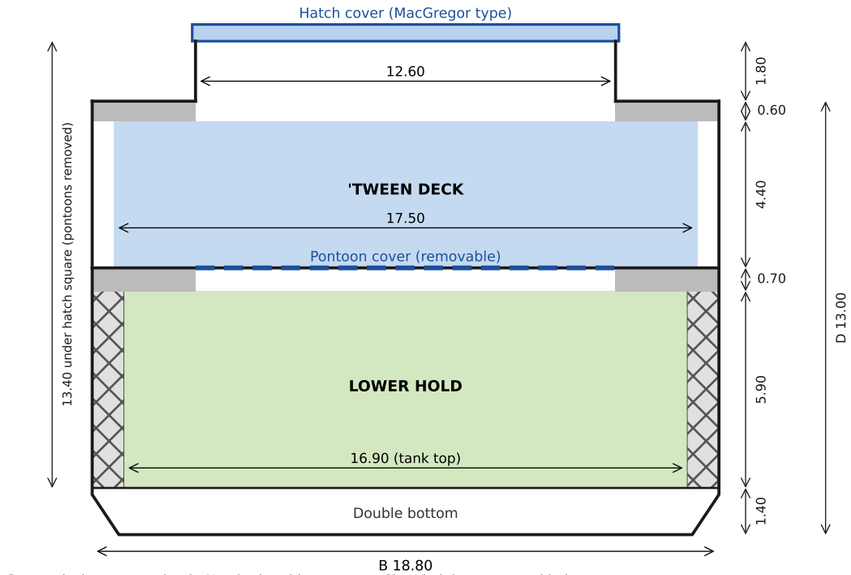

Grey = deck structure depth. Hatched = side structure. Clear heights measured below structure.

HOLD DATA

Space	Frames	L × B max	Clear H	Floor area	Grain m³	Bale m³	t/m²
No.1 Lower hold	81-128	32.90 × 16.90	5.90	486.6 m²	3,032.85	2,949.15	15.00
No.1 'Tween deck	81-128	32.90 × 17.50	4.40	569.9 m²*	3,050.77	2,761.84	3.50
No.1 Hatch	85-122	25.90 × 12.60	1.80**	326.3 m²	587.41	587.41	1.29
No.2 Lower hold	27-81	37.80 × 16.90	5.90	571.8 m²	3,547.33	3,408.37	15.00
No.2 'Tween deck	25-81	39.20 × 17.50	4.40	684.6 m²	3,655.15	3,289.14	3.50
No.2 Hatch	35-77	29.40 × 12.60	1.80**	370.4 m²	666.79	666.79	1.29
TOTAL					14,540.30	13,662.70	

* incl. pontoon covers; forward taper approximated. ** coaming height.

SHIP PARTICULARS & CARGO GEAR

Item	Value	Item	Value
LOA / LPP	111.78 / 99.75 m	Holds / Hatches	2 / 2 (box-shaped)
Breadth / Depth	18.80 / 13.00 m	Hatch covers	MacGregor type
Summer draft	9.214 m	Tween covers	Pontoon type
Summer DWT	10,959 t	Cranes	2 × SWL 25 t × 26 m
Upper deck	2.48 t/m²	Cranes combined	SWL 50 t
Outreach	Crane 14 m · Derrick 8 m	Derrick	1 × SWL 20 t × 19 m

NOTES

1. LOWER HOLDS plan, yellow areas: tank top outside the hatch square - cargo to be placed by forklift / pontoon stowage. Forklift: max. 39.0 t incl. cargo on tank top, 9.0 t on 2nd deck.
2. Floor limits are uniformly distributed loads. Concentrated loads (machinery, steel structures) to be spread with dunnage so that pressure ≤ limit over the actual footprint.
3. Red figures: clearance (m) from top of hatch cover to boom in lashing position (positions schematic).
4. Purple dashed arcs: max. working radius (R) of cranes / derrick. No.2 hatch aft of Fr.42 is outside crane reach - served by derrick only.
5. Figures for guidance only; final stowage subject to Master's approval and ship's stability.

TC DESCRIPTION

MV HAI DUONG 36

Self-geared Tween-Decker · NK Class · Built 2005



10,977 t	15,444 cbm	2 × 26 t	8.65 m
Summer DWT	Grain capacity	Cranes (comb. 52 t)	Summer draft

GENERAL

IMO NUMBER	**9317042**
FLAG	**Panama**
CLASS	**NK (Nippon Kaiji Kyokai)**
YEAR BUILT	**2005**
P&I CLUB	**West of England**
ISM	**Fully compliant**
DG	**Valid DoC No. 20NH0086-DG**

DIMENSIONS & TONNAGE

DWT / GT / NT	**10,977 / 7,243 / 3,602**
LOA	**121.00 m**
BREADTH / DEPTH	**18.20 / 12.70 m**
SUMMER DRAFT	**8.65 m**

CARGO GEAR

CRANES	**2 × SWL 26 t × 26 m**
COMBINED	**SWL 52 t**
DERRICK	**1 × SWL 20 t × 22 m**
OUTREACH	**Crane 14 m · Derrick 8 m**

CARGO SPACES

TYPE	**Tween-decker, box-shaped holds**
HOLDS / HATCHES	**2 / 2**
GRAIN / BALE	**15,444 / 14,971 cbm**
HATCH NO.1	**21.00 × 13.00 m**
HATCH NO.2	**36.00 × 13.00 m**
HOLD CLEAR HT.	**5.50 m**
CLEAR HT. 'TWEEN	**4.10-4.50 m**
HATCH COVERS	**Folding · Tween: pontoon**

STRENGTH (UNIFORM LOAD)

TANK TOP	**10.17 t/m² (uniform)**
2ND DECK	**2.30 t/m² (orig. 2.50)**
HATCH COVERS	**1.50 t/m² (orig. 1.75)**

SPEED & CONSUMPTION (PER DAY)

	SPEED	LSFO	LSMGO
LADEN	**11.0 kn**	**11.2 MT**	**0.9 MT**
BALLAST	**11.5 kn**	**10.8 MT**	**0.9 MT**
PORT WORKING	**-**	**-**	**1.7 MT**
PORT IDLE	**-**	**-**	**0.85 MT**

All figures about. Plus abt 3.0 MT LSMGO for heating F.O. each port (one time in / out).
Speed / consumption basis good weather, not exceeding BFT 4 / Douglas sea state 3, no adverse current.

CHARTERING DESK
chartering@hdmaritime.com.vn
Le Minh Hai +84 902 091 096 · Kenny Chen +84 982 824 130

CURRENT POSITIONS
Scan for open tonnage
hdmaritime.com.vn/open-tonnage.html

All details given in good faith but without guarantee. Hold dimensions and limits: see cargo hold plan.


MV HAI DUONG 36

hdmaritime.com.vn


CARGO HOLD DIMENSIONS & LIMITATIONS - general cargo / project cargo

All dimensions in metres. Frame spacing 0.75 m in cargo area. Aft to the left, forward to the right. Drawing not to be used as a substitute for the ship's approved plans.


UPPER DECK - HATCH COVERS (max. 1.50 t/m²)

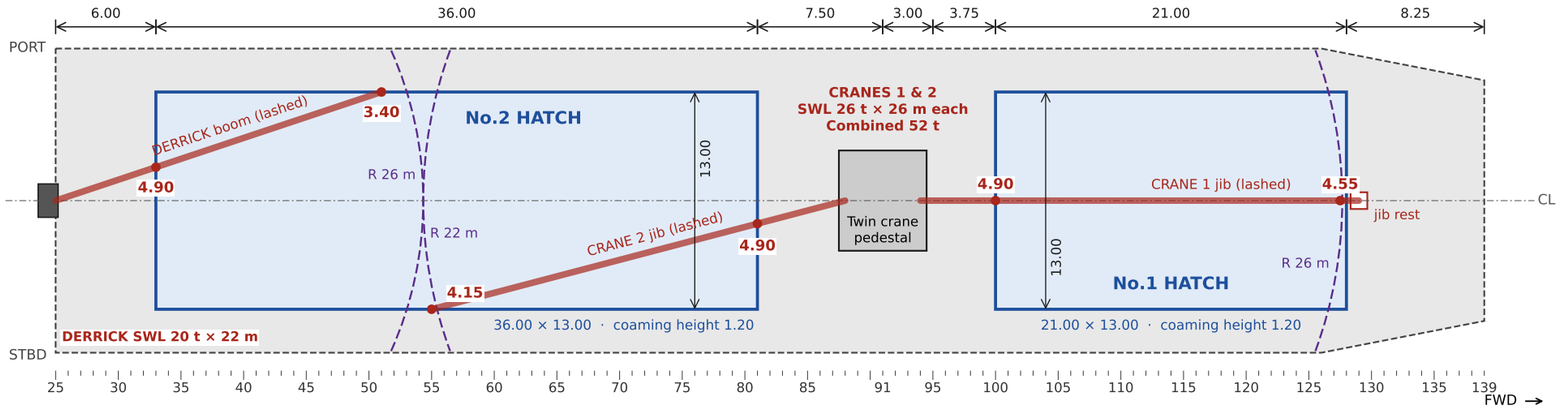

'TWEEN DECKS - 2nd DECK & PONTOON COVERS (max. 2.30 t/m²)

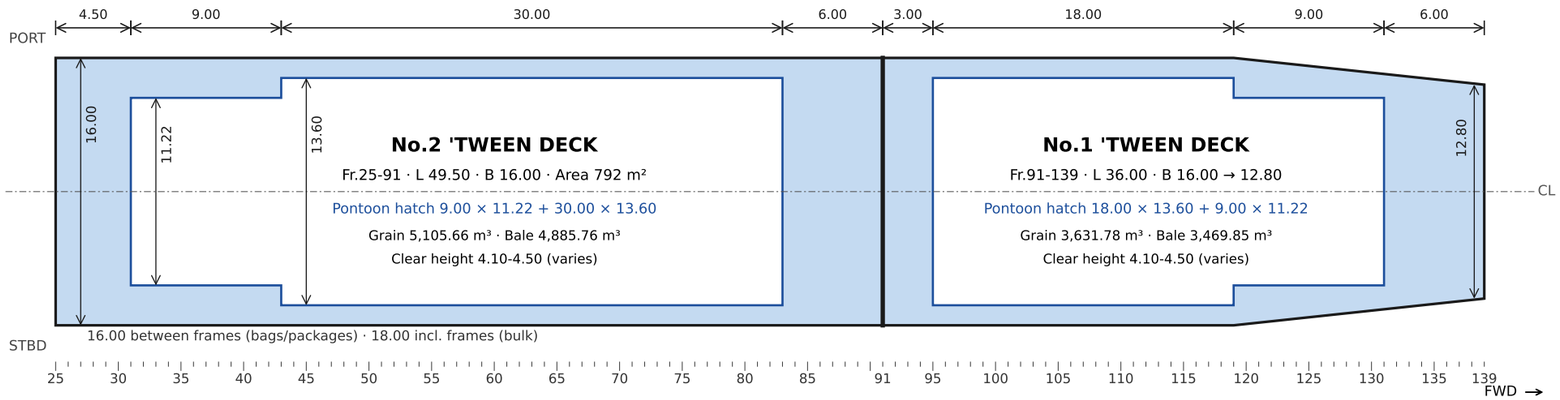


LOWER HOLDS - TANK TOP (max. 10.17 t/m² uniform)

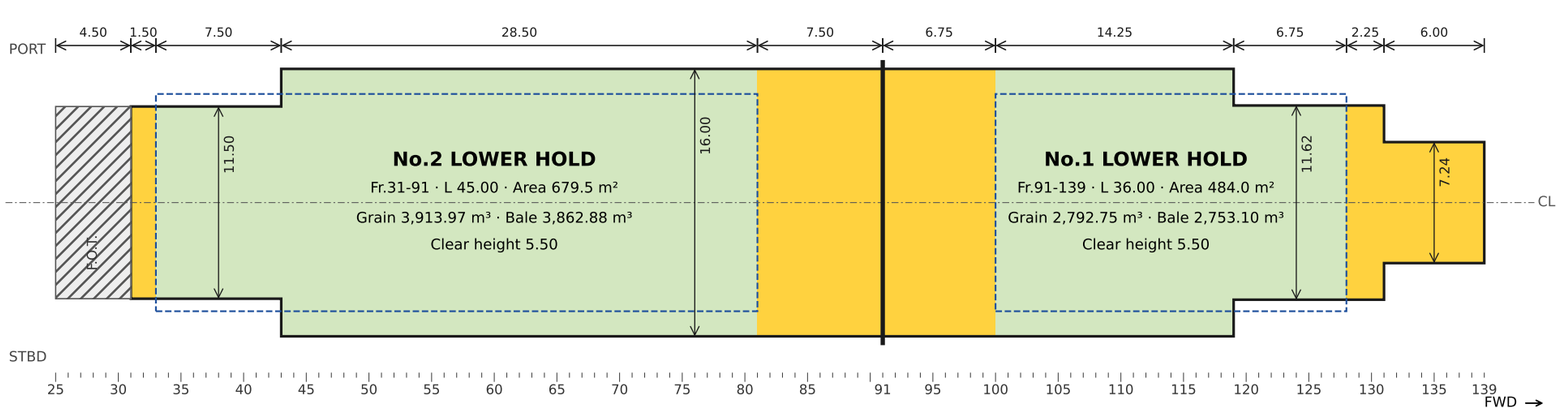

Lower hold under hatch square · Outside hatch square (forklift / pontoon stowage) · 'Tween deck · Hatch opening

MIDSHIP SECTION (looking forward)

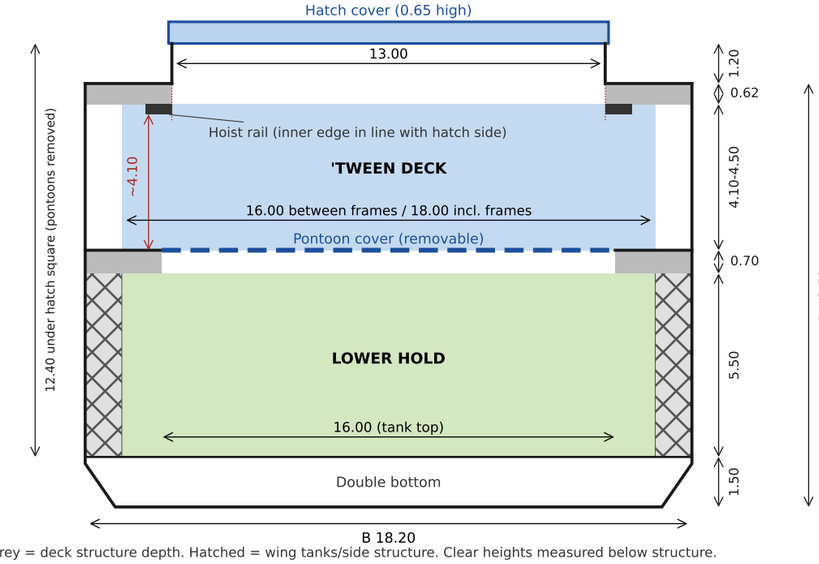

Grey = deck structure depth. Hatched = wing tanks/side structure. Clear heights measured below structure.

HOLD DATA

Space	Frames	L × B max	Clear H	Floor area	Grain m³	Bale m³	t/m²
No.1 Lower hold	91-139	36.00 × 16.00	5.50	484.0 m²	2,792.75	2,753.10	10.17
No.1 'Tween + hatch	91-139	36.00 × 16.00	4.10***	552.0 m²*	3,631.78	3,469.85	2.30
No.1 Hatch cover	100-128	21.00 × 13.00	1.20**	273.0 m²	-	-	1.50
No.2 Lower hold	31-91	45.00 × 16.00	5.50	679.5 m²	3,913.97	3,862.88	10.17
No.2 'Tween + hatch	25-91	49.50 × 16.00	4.10***	792.0 m²	5,105.66	4,885.76	2.30
No.2 Hatch cover	33-81	36.00 × 13.00	1.20**	468.0 m²	-	-	1.50
TOTAL					15,444.16	14,971.59	

* incl. pontoon covers; fwd taper approx. ** coaming height. *** varies 4.10-4.50, see note 3.

SHIP PARTICULARS & CARGO GEAR

Item	Value	Item	Value
LOA / LPP	121.10 / 112.50 m	Holds / Hatches	2 / 2 (box-shaped)
Breadth / Depth	18.20 / 12.70 m	Tween covers	Pontoon type
Summer draft	8.650 m	Cranes	2 × SWL 26 t × 26 m
Summer DWT	10,977 t	Cranes combined	SWL 52 t
Gross tonnage	7,243	Derrick	1 × SWL 20 t × 22 m
Outreach	Crane 14 m · Derrick 8 m	Hatch covers	Folding type


NOTES

1. LOWER HOLDS plan, yellow areas: tank top outside the hatch square - cargo to be placed by forklift / pontoon stowage. Hatched area aft of No.2 hold (Fr.25-31): fuel oil tank.
2. Floor limits are uniformly distributed loads. Concentrated loads (machinery, steel structures) to be spread with dunnage so that pressure ≤ limit over the actual footprint.
3. 'Tween clear height (to underside of main deck structure) varies 4.10-4.50 m; lowest ~4.10 m under hoist rails in line with hatch sides - verify on board if close. Grain/bale incl. hatchway.
4. Red figures: clearance (m) from top of hatch cover to boom in lashing position. Deck cargo height incl. dunnage must be less; min. 4.55 m (Crane 1), 4.15 m (Crane 2), 3.40 m (derrick).
5. Purple dashed arcs: max. working radius (R) of cranes / derrick. No.2 hatch aft of Fr.54 is outside crane reach - served by derrick only.
6. Dangerous goods: DG Document of Compliance No. 20NH0086-DG (ClassNK). Weather deck: all classes permitted (Class 1 except 1.4S: min. 3 m from machinery space). Holds: restricted - see DoC appendix.
7. Figures for guidance only; final stowage subject to Master's approval and ship's stability.

TC DESCRIPTION

MV HAI DUONG 68

Self-geared Tween-Decker · NK Class · Built 2004

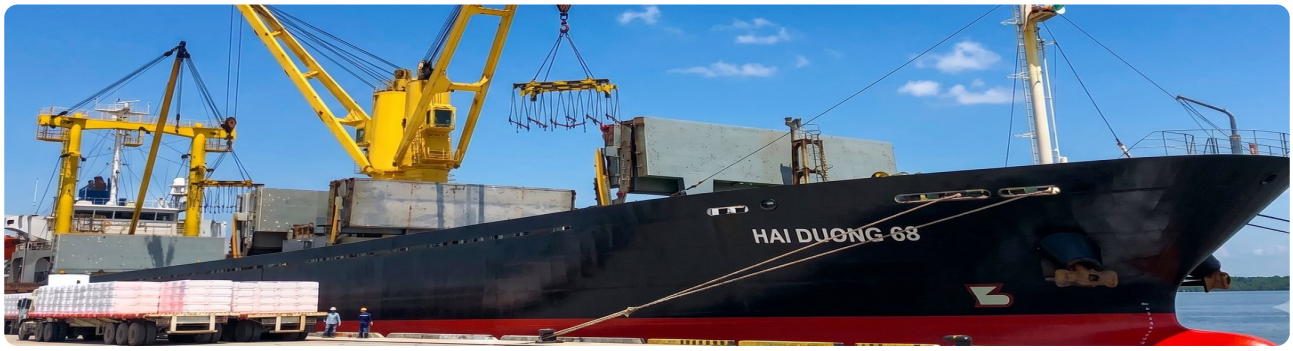

10,977 t	15,444 cbm	2 × 26 t	8.65 m
Summer DWT	Grain capacity	Cranes (comb. 52 t)	Summer draft

GENERAL

IMO NUMBER	**9296444**
FLAG	**Kiribati**
CLASS	**NK (Nippon Kaiji Kyokai)**
YEAR BUILT	**2004**
P&I CLUB	**West of England**
ISM	**Fully compliant**
DG	**Valid DoC No. 23NH025700-DG**

DIMENSIONS & TONNAGE

DWT / GT / NT	**10,977 / 7,243 / 3,602**
LOA	**121.00 m**
BREADTH / DEPTH	**18.20 / 12.70 m**
SUMMER DRAFT	**8.65 m**

CARGO GEAR

CRANES	**2 × SWL 26 t × 26 m**
COMBINED	**SWL 52 t**
DERRICK	**1 × SWL 20 t × 22 m**
OUTREACH	**Crane 14 m · Derrick 8 m**

CARGO SPACES

TYPE	**Tween-decker, box-shaped holds**
HOLDS / HATCHES	**2 / 2**
GRAIN / BALE	**15,444 / 14,971 cbm**
HATCH NO.1	**21.00 × 13.00 m**
HATCH NO.2	**36.00 × 13.00 m**
HOLD CLEAR HT.	**5.50 m**
CLEAR HT. 'TWEEN	**4.10-4.50 m**
HATCH COVERS	**Folding · Tween: pontoon**

STRENGTH (UNIFORM LOAD)

TANK TOP	**10.17 t/m² (uniform)**
2ND DECK	**2.30 t/m² (orig. 2.50)**
HATCH COVERS	**1.55 t/m² (orig. 1.75)**

SPEED & CONSUMPTION (PER DAY)

	SPEED	LSFO	LSMGO
LADEN	**11.0 kn**	**11.2 MT**	**0.9 MT**
BALLAST	**11.5 kn**	**10.8 MT**	**0.9 MT**
PORT WORKING	**-**	**-**	**1.7 MT**
PORT IDLE	**-**	**-**	**0.85 MT**

All figures about. Plus abt 3.0 MT LSMGO for heating F.O. each port (one time in / out).
Speed / consumption basis good weather, not exceeding BFT 4 / Douglas sea state 3, no adverse current.

CHARTERING DESK
chartering@hdmaritime.com.vn
Le Minh Hai +84 902 091 096 · Kenny Chen +84 982 824 130

CURRENT POSITIONS
Scan for open tonnage
hdmaritime.com.vn/open-tonnage.html

All details given in good faith but without guarantee. Hold dimensions and limits: see cargo hold plan.


MV HAI DUONG 68

hdmaritime.com.vn


CARGO HOLD DIMENSIONS & LIMITATIONS - general cargo / project cargo

All dimensions in metres. Frame spacing 0.75 m in cargo area. Aft to the left, forward to the right. Drawing not to be used as a substitute for the ship's approved plans.


UPPER DECK - HATCH COVERS (max. 1.55 t/m²)

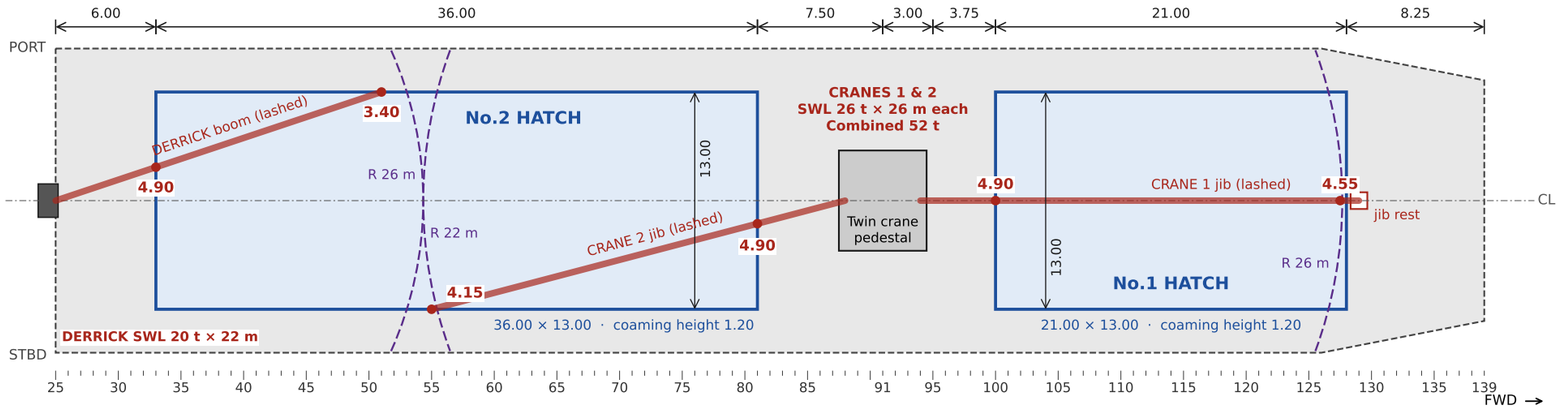

'TWEEN DECKS - 2nd DECK & PONTOON COVERS (max. 2.30 t/m²)

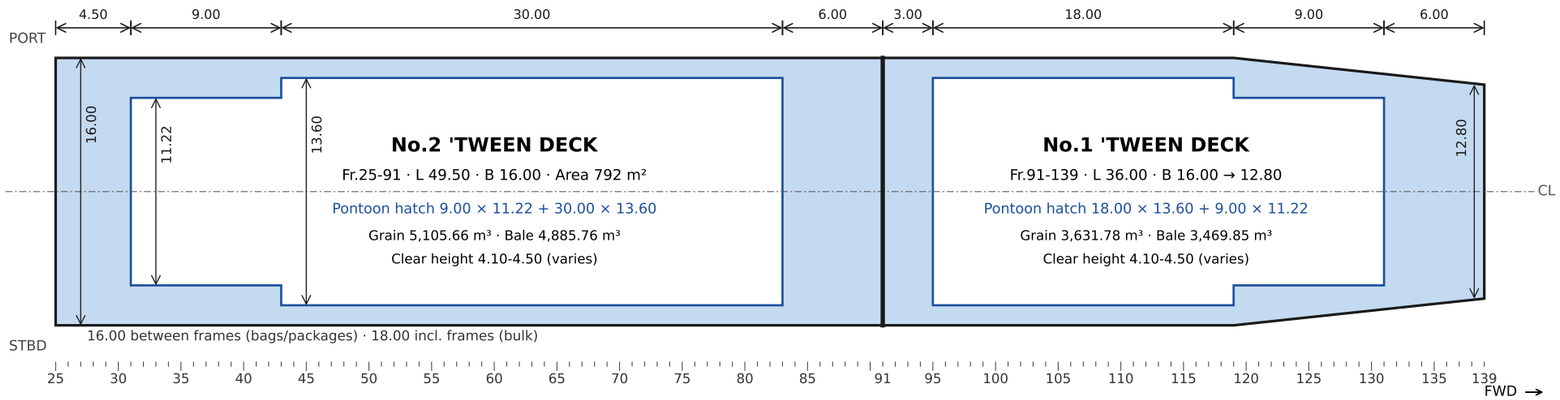


LOWER HOLDS - TANK TOP (max. 10.17 t/m² uniform)

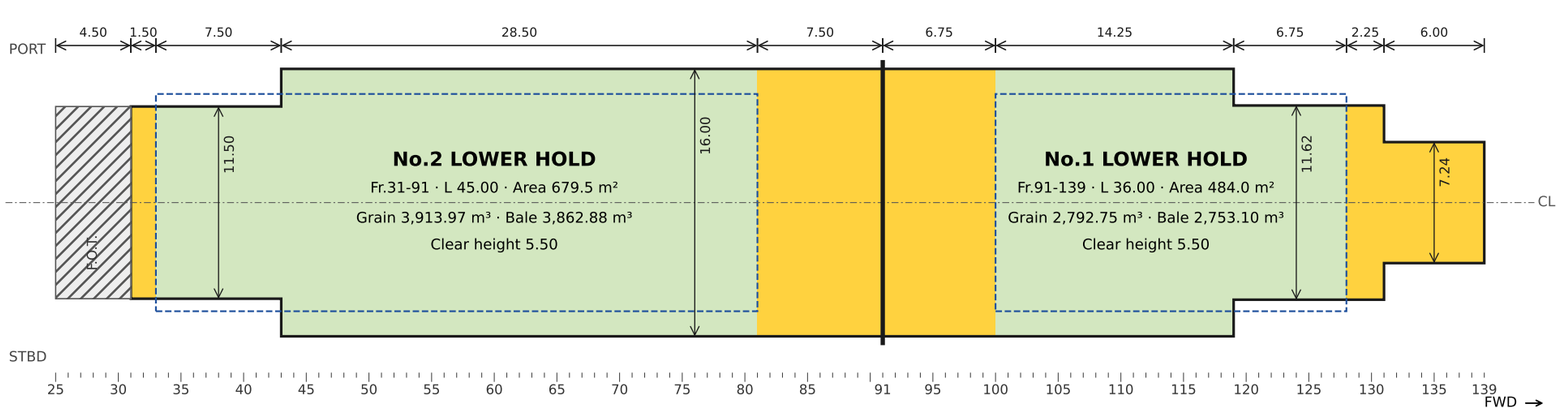

Lower hold under hatch square · Outside hatch square (forklift / pontoon stowage) · 'Tween deck · Hatch opening

MIDSHIP SECTION (looking forward)

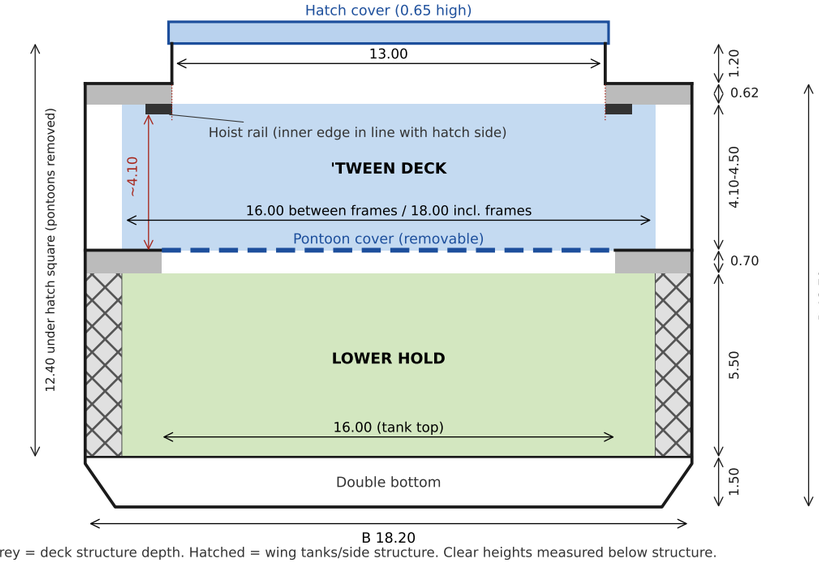

Grey = deck structure depth. Hatched = wing tanks/side structure. Clear heights measured below structure.

HOLD DATA

Space	Frames	L × B max	Clear H	Floor area	Grain m³	Bale m³	t/m²
No.1 Lower hold	91-139	36.00 × 16.00	5.50	484.0 m²	2,792.75	2,753.10	10.17
No.1 'Tween + hatch	91-139	36.00 × 16.00	4.10***	552.0 m²*	3,631.78	3,469.85	2.30
No.1 Hatch cover	100-128	21.00 × 13.00	1.20**	273.0 m²	-	-	1.55
No.2 Lower hold	31-91	45.00 × 16.00	5.50	679.5 m²	3,913.97	3,862.88	10.17
No.2 'Tween + hatch	25-91	49.50 × 16.00	4.10***	792.0 m²	5,105.66	4,885.76	2.30
No.2 Hatch cover	33-81	36.00 × 13.00	1.20**	468.0 m²	-	-	1.55
TOTAL					15,444.16	14,971.59	

* incl. pontoon covers; fwd taper approx. ** coaming height. *** varies 4.10-4.50, see note 3.

SHIP PARTICULARS & CARGO GEAR

Item	Value	Item	Value
LOA / LPP	121.10 / 112.50 m	Holds / Hatches	2 / 2 (box-shaped)
Breadth / Depth	18.20 / 12.70 m	Tween covers	Pontoon type
Summer draft	8.650 m	Cranes	2 × SWL 26 t × 26 m
Summer DWT	10,977 t	Cranes combined	SWL 52 t
Gross tonnage	7,243	Derrick	1 × SWL 20 t × 22 m
Outreach	Crane 14 m · Derrick 8 m	Hatch covers	Folding type

NOTES

1. LOWER HOLDS plan, yellow areas: tank top outside the hatch square - cargo to be placed by forklift / pontoon stowage. Hatched area aft of No.2 hold (Fr.25-31): fuel oil tank.
2. Floor limits are uniformly distributed loads. Concentrated loads (machinery, steel structures) to be spread with dunnage so that pressure ≤ limit over the actual footprint.
3. 'Tween clear height (to underside of main deck structure) varies 4.10-4.50 m; lowest ~4.10 m under hoist rails in line with hatch sides - verify on board if close. Grain/bale incl. hatchway.
4. Red figures: clearance (m) from top of hatch cover to boom in lashing position. Deck cargo height incl. dunnage must be less; min. 4.55 m (Crane 1), 4.15 m (Crane 2), 3.40 m (derrick).
5. Purple dashed arcs: max. working radius (R) of cranes / derrick. No.2 hatch aft of Fr.54 is outside crane reach - served by derrick only.
6. Dangerous goods: DG Document of Compliance No. 23NH025700-DG (ClassNK). Weather deck: all classes permitted (Class 1 except 1.4S: min. 3 m from machinery space). Holds: restricted - see DoC appendix.
7. Figures for guidance only; final stowage subject to Master's approval and ship's stability.