





NT 75/1 Me Ec H Z22

The TÜV tested NT 75/1 Me Ec H Z22 safety vacuum cleaner is a powerful, single motor wet and dry vacuum cleaner for explosive dust (hazard class zone 22) with continuous antistatic system.



1 Zone 22 + dust class M

- For combustible dusts in dust explosion classes, Zone 22 and health-endangering dusts, dust class M.

2 Antistatic system

- All Kärcher safety vacuum cleaners feature a continuous antistatic system with conductive accessories.

3 Variable speed control

- The brushless EC drive has a life expectancy of 5000 hours - ideal for continuous use.



NT 75/1 Me Ec H Z22

- Brushless EC drive (5,000 h)
- Antistatic system
- Suitable for asbestos

Technical data

Order no.	1.667-239.0	
EAN code	4039784538115	
Current type	V / Hz	220 - 240 / 50 - 60
Air flow	l/s	61
Vacuum	mbar / kPa	220 / 22
Container content	l	75
Max. rated input power	W	1000
Standard nominal width	DN 40	
Cable length	m	10
Sound pressure level	dB(A)	76
Weight	kg	27.8
Dimensions (L × W × H)	mm	640 × 540 × 925


Equipment

Suction hose	m	4 / with bend (electrically conductive)	Stop swivel castor	■
Suction tube	piece(s) × m	1 × 1 / Metal	Dust class	H
Filter bag	Fleece		Safety filter set	■
Wet/dry floor nozzle	mm	360		
Crevice nozzle	■			
Antistatic system	■			
Stainless steel container	■			
Flat pleated filter	Fibreglass			
Metal bend	■			
Push handle	■			
Protection class	I			

■ Included in the scope of supply.

NT 75/1 ME EC H Z22

1.667-239.0

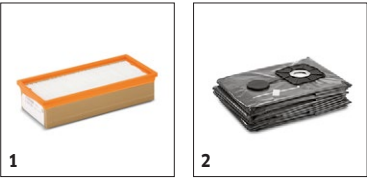


		Order no.	Anzahl	Dummy	Dummy	Dummy	Price	Description	
Flat pleated filter HEPA, dust class H									
HEPA flat pleated filter	1	6.904-364.0	1 piece(s)					HEPA flat pleated filter, dust class H (HEPA 13).	■
Safety filter sets/bags									
Safety filter bags	2	6.904-420.0	5 piece(s)					For dust-free/low-dust emptying in conjunction with the 4.070-930.0 container, with dust disposal bag, electrically conductive. Checked and approved for dust class H.	■

■ Included in the scope of supply.
 ☐ Available accessories.

NT 75/1 ME EC H Z22

1.667-239.0

KÄRCHER

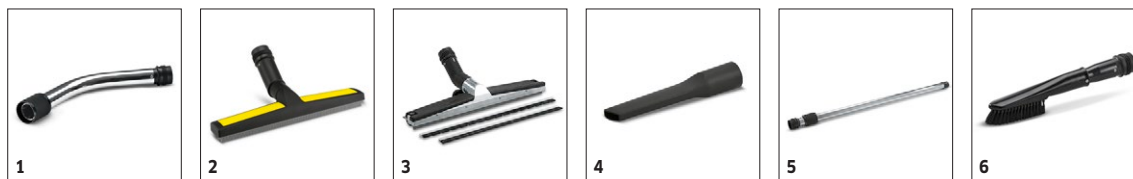

		Order no.	Anzahl	Nennweite	Länge	Breite	Price	Description	
Bends, metal									
Bend, metal, non-interchangeable	1	4.036-032.0	1 piece(s)	40				Non-interchangeable bend DN 40, for type Z22 safety vacuum cleaners.	■
Floor nozzles									
Wet and dry floor nozzle	2	4.763-244.0	1 piece(s)	40		360 mm		Multi-purpose nozzle (DN 40), plastic, 360 mm working width. With side rollers, brush strips (6.905-878.0) and squeegees (6.905-877.0).	■
Wet and dry floor nozzle, non-interchangeable	3	4.130-399.0	1 piece(s)	40		450 mm		Aluminium floor nozzle, grounded, non-interchangeable, 450 mm, height adjustable. As a standard accessory for NT 80/1 B1 M S and optional for NT 75/1 Me Ec H Z22.	□
Crevice nozzles									
Crevice nozzle	4	4.763-243.0	1 piece(s)	40	290 mm			Plastic, non-interchangeable.	■
Suction tubes, metal									
Suction tube, non-interchangeable	5	4.025-372.0	1 piece(s)	40	1000 mm			Metal, chrome-plated - non-interchangeable with screw connection. Only suitable for use with NT 80/1 B1 M, NT 80/1 B1 M S and NT 75/1 Me Ec H Z22.	■
All-purpose brushes									
Multi-purpose brush, non-interchangeable	6	4.763-242.0	1 piece(s)	40	120 mm			Natural bristles (ox hair), bristle attachment 120 x 45 mm, non-interchangeable screw connection.	□

■ Included in the scope of supply. □ Available accessories.

NT 75/1 ME EC H Z22
1.667-239.0




		Order no.	Anzahl	Nennweite	Länge		Price	Description	
Suction hoses complete									
Suction hose compl. Z22 L=4m	1	4.440-991.0	1 piece(s)	40					☒
Suction hose compl. B1 M L=8m	2	4.440-013.0	1 piece(s)	40	8 m			8 m long, electroconductive suction hose, NW 35. Screw connections not to be mixed up.	☐

☒ Included in the scope of supply. ☐ Available accessories.

NT 75/1 ME EC H Z22

1.667-239.0

KÄRCHER



		Order no.	Flow rate	Inlet temperature	Length	Length	Price	Description	
Teleskopstangen									
Telescopic lance TL 10 H	1	4.762-611.0		max. 60 °C				Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	- ☐
Telescopic lance TL 10 C	2	4.762-612.0		max. 60 °C				Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	- ☐
TL vacuum cleaner adapter	3	9.751-306.0						TL suction cup for 10 and 14 m long telescopic lances comprising suction bend connection (DN 35, DN 40) and connection for the suction nozzles.	- ☐

■ Included in the scope of supply. □ Available accessories.

Authorized Distributor



Cleaning solutions for every need

NT 75/1 Me Ec H Z22, 1.667-239.0, 2021-03-09