



NT 75/2 Ap Me Tc

High-performance, dual-motor wet/dry vacuum cleaner for professional use. Effective air-blast cleaning of the flat pleated filter maintains virtually constant cleaning power.



1 On-board storage

- The large on-board storage space on the casing head ensures that tools and accessories are always stored and close to hand.



2 Integrated drain hose

- Easily accessible drain hose for convenient liquid disposal.



3 ApClean (semi-automatic filter cleaning)

- The free filter means that the user can work for long intervals without interruption.
- Optimum suction power with high efficiency.



4 Hose and bend attachment

- Convenient suction hose and bend attachment for easy transport and storage.



NT 75/2 Ap Me Tc

- Semi-automatic filter cleaning
- Tilting chassis
- Flat pleated filter (dust class M)

Technical data

Order no.	1.667-292.0	
EAN code	4039784727298	
Current type	Ph / V / Hz	1 / 220 - 240 / 50 - 60
Air flow	l/s	2 x 74
Vacuum	mbar / kPa	254 / 25.4
Container content	l	75
Container material	Stainless steel	
Rated input power	W	max. 2760
Standard nominal width	DN 40	
Cable length	m	10
Sound pressure level	dB(A)	73
Number of motors	2	
Weight	kg	26
Dimensions (L x W x H)	mm	700 x 505 x 995

Equipment


Suction hose	m	4 / with bend	Filter cleaning	ApClean (semi-automatic filter cleaning)
Suction tube	piece(s) x m	2 x 0.5 / Metal	Sturdy bumper	■
Filter bag	piece(s)	1 / Paper	Push handle	■
Wet/dry floor nozzle	mm	360	Protection class	II
Crevice nozzle	■		Stop swivel castor	■
Drain hose (oil-resistant)	■			
Automatic cut-out features at max. filling quality	■			
Eco filter system	■			
Stainless steel container	■			
Flat pleated filter		Paper		
Tilting chassis	■			

■ Included in the scope of supply.

NT 75/2 AP ME TC

1.667-292.0

KÄRCHER

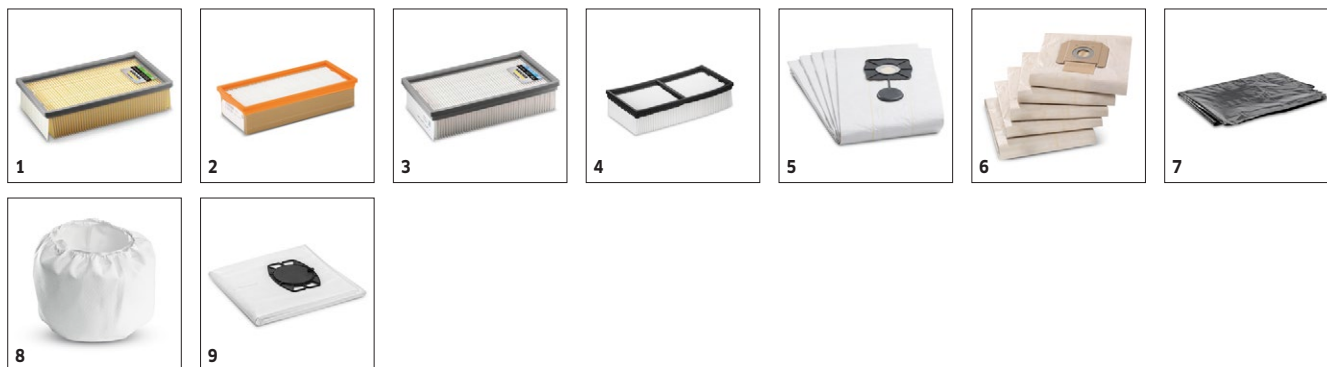

		Order no.	Anzahl	Dummy	Dummy	Dummy	Price	Description	
Flat pleated filter, paper									
Flat pleated filter, paper	1	6.904-283.0	1 piece(s)					Paper, dust class M (also NT 65/2 Eco / opt. for NT 75/2 Eco Tc models).	■
Flat pleated filter HEPA, dust class H									
HEPA flat pleated filter	2	6.904-364.0	1 piece(s)					HEPA flat pleated filter, dust class H (HEPA 13).	☐
Flat pleated filter, PES									
Flat pleated filter, PES	3	6.904-284.0	1 piece(s)					Polyester fleece, rot-proof, dust class M (also for NT 65/2 Eco / Me / Tc and NT 72/2 Eco Tc).	☐
Flat pleated filter, PTFE									
Flat pleated filter, PTFE	4	6.907-449.0	1 piece(s)					Polyester fleece with PTFE coating, dust class M, for Tact ² vacuum cleaners. Particularly suitable for very adhesive materials.	☐
Wet filter bag									
Wet filter bag	5	6.904-252.0	5 piece(s)					Dust class L, general cleaning, dry and wet, tear-resistant.	☐
Paper filter bags									
Paper filter bags	6	6.904-285.0	5 piece(s)					Dust class M, triple-ply, reinforced outer layer, tear-resistant.	☐
Plastic sacks for dust-free disposal									
Plastic sack for dust-free disposal	7	6.900-698.0	10 piece(s)					PE plastic sack for dust-free disposal.	☐
Fabric filter									
Membrane filter	8	6.904-282.0	1 piece(s)					Polyester needle fleece, dust class M, washable (40 °C). Not suitable for dust class H applications.	☐
Fleece filter bags									
Fleece filter bags	9	2.885-753.0	5 piece(s)						☐

■ Included in the scope of supply. □ Available accessories.

NT 75/2 AP ME TC

1.667-292.0

KÄRCHER


		Order no.	Anzahl	Nennweite	Länge	Breite	Price	Description	
Bend, plastic									
DN 40 bend	1	2.889-171.0	1 piece(s)	40				Bend for the new clip system in nominal size DN 40.	■
Plastic bend	2	5.031-718.0	1 piece(s)	35				Plastic with C 35 clip system.	□
Bend, plastic, electrically conductive	3	5.031-939.0	1 piece(s)	35				Plastic, DN 35 with C 35 clip system, electrically conductive.	□
	4	5.032-427.0	1 piece(s)	40				Plastic, with C 40 clip system, electrically conductive.	□
Bend	5	2.889-148.0	1 piece(s)	35				Ergonomic bend for the new clip system. With airflow control slide, in an antistatic design.	□
Floor nozzles									
Wet and dry floor nozzle Adv	6	2.889-153.0	1 piece(s)	40		360 mm		360 mm wide wet and dry floor nozzle with easy-to-change inserts, squeegees.	■
Multi-purpose nozzle, wet/dry	7	6.903-018.0	1 piece(s)	40		370 mm		Aluminium with height-adjustable rollers, brush strips (6.903-064.0) and squeegees (6.903-081.0, oil-resistant).	□
	8	6.906-383.0	1 piece(s)	40		450 mm		Aluminium with height-adjustable rollers, brush strips (6.903-065.0) and squeegees (6.906-146.0).	□
	9	6.906-384.0	1 piece(s)	35		370 mm		Aluminium with height-adjustable rollers, brush strips (6.903-064.0) and squeegees (6.903-081.0, oil-resistant).	□
Wet and dry floor nozzle	10	2.889-117.0	1 piece(s)	40		400 mm		The wet and dry floor nozzle (ID 40) permits a quick squeegee/brush change and is suitable for wet vacuum cleaning of large areas.	□
Crevice nozzles									
Crevice nozzle DN 40 300mm 1:50	11	5.130-655.0							■
Crevice nozzle	12	6.900-385.0	1 piece(s)	35	210 mm			Plastic.	□
	13	6.900-922.0	1 piece(s)	35	500 mm			Metal.	□
	14	6.905-817.0	1 piece(s)	40	400 mm				□
Suction tubes, stainless steel									
Set suction tube stainless steel NW40 55	15	2.889-194.0	2 piece(s)	40	550 mm			Stainless steel suction tube set (2 x 0.55 m).	■
Suction tube	16	6.902-081.0	1 piece(s)	40	500 mm			For use in wet or damp environments or for wet vacuuming.	□
	17	6.906-531.0	1 piece(s)	40	1000 mm				□
	18	6.902-154.0	1 piece(s)	35	500 mm			Mainly for wet vacuuming or for vacuuming corrosive media.	□
Bends, stainless steel									
Bend, stainless steel, ID 35	19	6.903-141.0	1 piece(s)	35				Stainless steel.	□
Bend, stainless steel, ID 40	20	6.902-079.0	1 piece(s)	40					□
Bends, metal									
Bend, metal	21	6.900-519.0	1 piece(s)	35				Metal, ID 35.	□
	22	6.900-276.0	1 piece(s)	40				Metal, ID 40.	□
Car cleaning nozzles									
Car nozzle	23	6.900-952.0	1 piece(s)	40		90 mm		Plastic.	□
Rubber suction tools, nose 45°									
Rubber suction tool, nose 45°	24	6.902-104.0	1 piece(s)	35	220 mm			For vacuuming machines, oil-resistant.	□
	25	6.902-105.0	1 piece(s)	40	220 mm			For vacuuming machinery, oil-resistant.	□
Pipe dusting nozzles									
Pipe brush 35/100	26	6.903-035.0	1 piece(s)	35				Plastic, tube diameter 100 mm.	□
Pipe brush 35/200	27	6.903-036.0	1 piece(s)	35				Plastic, tube diameter 200 mm.	□
Suction tubes, metal									
Suction tube	28	6.900-514.0	1 piece(s)	35	500 mm			Metal, chromium-plated.	□

■ Included in the scope of supply. □ Available accessories.

NT 75/2 AP ME TC

1.667-292.0

KÄRCHER


		Order no.	Anzahl	Nennweite	Länge	Price	Description	
Complete suction hoses (clip system)								
Suction hose DN 40, length 4 m	1	2.889-138.0	1 piece(s)	40	4 m		4 m long suction hose with new bayonet and clip fastener.	■
Suction hose	2	4.440-678.0	1 piece(s)	40	4 m		With bend, C ID 40.	□
Suction hose + PFC module	3	4.440-679.0	1 piece(s)	40	4 m		With bend and module (4.060-474.0).	□
Suction hose + PFC module, electrically conductive	4	4.440-728.0	1 piece(s)	40	4 m		With bend and module (4.060-533.0), electrically conductive.	□
Electrically conductive suction hose	5	2.889-137.0	1 piece(s)	35	4 m		4 m suction hose with new bayonet and clip fastener. Electrically conductive.	□
Suction hose	6	2.889-139.0	1 piece(s)	40	2.5 m		Suction hose with new bayonet and clip fastener. Length: 2.5 m.	□
Suction hose, oil-resistant	7	2.889-140.0	1 piece(s)	40	4 m		Oil-resistant suction hose with new bayonet and clip fastener. Length: 4 m.	□
Electrically conductive suction hose	8	2.889-141.0	1 piece(s)	40	4 m		4 m long, electrically conductive suction hose with new bayonet and clip fastener.	□
	9	2.889-142.0	1 piece(s)	40	2.5 m		Suction hose, electrically conductive, with new bayonet and clip fastener. 2.5 m long.	□
Repair kits								
Repair kit, C 40	10	2.639-873.0	1 piece(s)	40			Suction hose repair kit (clip system).	□
Repair kit, ID 61	11	2.862-038.0	1 piece(s)	61			Suction hose repair kit.	□
Suction hoses (clip system)								
Suction hose	12	6.906-279.0	1 piece(s)	40	10 m		With bayonet and clip connection, C-45.	□
	13	6.906-321.0	1 piece(s)	40	4 m		With bayonet and clip connection, C 40.	□
	14	6.906-714.0	1 piece(s)	40	4 m		With bayonet and clip connection, oil-resistant, C-45.	□
	15	6.906-546.0	1 piece(s)	40	4 m		With bayonet and clip connection, electrically conductive, C 40.	□
	16	6.906-635.0	1 piece(s)	40	16 m		With bayonet and clip connection, C-40.	□
	17	6.906-877.0	1 piece(s)	40	10 m		With bayonet and clip connection, electrically conductive, C-40.	□
Suction hoses complete								
Suction hose, complete	18	4.440-264.0	1 piece(s)	61	4 m		Plastic.	□
	19	4.440-328.0	1 piece(s)	61	3 m		Industrial hose, PVC / elastomer with steel spiral, smooth inside.	□
	20	4.440-467.0	1 piece(s)	61	10 m		Plastic.	□
Suction hose, complete, oil-resistant	21	4.440-613.0	1 piece(s)	61	4 m		Oil-resistant.	□
Suction hose, complete, electrically conductive	22	4.440-616.0	1 piece(s)	61	4 m		Electrically conductive.	□
Suction hose, complete	23	4.440-263.0	1 piece(s)	40	4 m		Plastic.	□
	24	4.440-303.0	1 piece(s)	40	4 m		Oil-resistant.	□
	25	4.440-463.0	1 piece(s)	40	10 m		Plastic.	□
	26	4.440-466.0	1 piece(s)	40	10 m		Electrically conductive, plastic.	□
Suction hose, complete, oil-resistant	27	4.440-612.0	1 piece(s)	40	10 m		Oil-resistant.	□
Connecting sleeves								
Adapter, ID 32/35, with internal thread	28	6.902-077.0	1 piece(s)	32			For connecting two suction hoses (not ESB 28 and 34).	□
Connecting adapter, ID 40, with internal thread	29	6.900-286.0	1 piece(s)	40			For connecting two suction hoses, threaded at both ends.	□
Connecting sleeve, ID 61, with female thread	30	6.902-078.0	1 piece(s)	61				□

■ Included in the scope of supply. □ Available accessories.

NT 75/2 AP ME TC

1.667-292.0



		Order no.	Anzahl	Nennweite	Länge		Price	Description	
Extension hoses (clip system)									
Extension hose	31	6.906-344.0	1 piece(s)	40	2.5 m			For all C-40 hoses.	☐
	32	2.889-146.0	1 piece(s)	40	2.5 m			Extension hose for new clip system ID 40. Length: 2.5 m.	☐

■ Included in the scope of supply.
 ☐ Available accessories.

NT 75/2 AP ME TC

1.667-292.0

KÄRCHER


		Order no.	Anzahl	Nennweite		Price	Description	
Y-adapter kit								
Y-adapter kit	1	2.637-217.0	1 piece(s)	35			Distributor, plastic.	☐
Connection adapter C ID (clip to cone), electrically conductive								
Connection adapter C DN 35	2	5.407-112.0	1 piece(s)	35			C 35 hose connection for ID 35 accessories, electrically conductive.	☐
Connection adapter C DN 40	3	5.407-109.0	1 piece(s)	40			C 40 hose connection for ID 35 accessories, electrically conductive.	☐
	4	5.407-111.0	1 piece(s)	40			C 40 hose connection for ID 40 accessories, electrically conductive.	☐
Adapter clip DN 35 on cone DN 35	5	5.407-005.0						☐
Adapter clip DN 40 on cone DN 35	6	5.407-006.0						☐
Connection adapter for power tools, clip-on, electrically conductive								
Connection adapter for power tools, C 35, electrically conductive	7	5.453-042.0	1 piece(s)	35			Plastic, adjustable from ID 26-36 (Te / Eco M / H), electrically conductive.	☐
	8	5.453-048.0	1 piece(s)	35			Inside Ø 25.4 mm, outside Ø 34.6 mm / 38 mm, electrically conductive.	☐
Connection Adapter for power tools, C 35, electrically conductive	9	5.453-049.0	1 piece(s)	35			Inside Ø 28.6 mm, outside Ø 37.3 mm / 38.8 mm, electrically conductive. Only wet and dry suction adapter.	☐
Connection adapter for power tools, C 35, electrically conductive	10	5.453-050.0	1 piece(s)	35			Inside Ø 27 mm, outside Ø 36.5 mm / 38.8 mm, electrically conductive.	☐
Connection Adapter for power tools, C 35, electrically conductive	11	5.453-051.0	1 piece(s)	35			Inside Ø 32 mm, outside Ø 39 mm, electrically conductive.	☐
	12	5.453-052.0	1 piece(s)	35			Inside Ø 28 mm, outside Ø 34 mm / 38.8 mm, electrically conductive.	☐
Adapter for electric power tools, screwable								
Adapter for electric power tools, screwable, ID 35	13	5.453-016.0	1 piece(s)	35			Plastic, adjustable from ID 26-36.	☐
	14	5.453-026.0	1 piece(s)	35			Inside Ø 28.6 mm, outside Ø 37.3 mm / 38.8 mm.	☐
	15	6.902-059.0	1 piece(s)	35			Inside Ø 32 mm, outside Ø 39 mm.	☐
	16	6.902-095.0	1 piece(s)	35			Inside Ø 28 mm, outside Ø 34 / 38.8 mm, electrically conductive.	☐
Expansion pieces (tube -> nozzle)								
Adapter	17	5.453-019.0	1 piece(s)	40			From ID 40 to ID 61, plastic.	☐
Reducing sleeves								
Reducer	18	5.407-108.0	1 piece(s)	40			From C 40 hose with outer thread 35 for connection bushing, screwable, ID 35.	☐
Reduction bushing	19	5.407-113.0	1 piece(s)	40			Reduction bushing from clip C 40 to clip C 35.	☐
Reducers (tube -> nozzle)								
Reducer	20	6.902-017.0	1 piece(s)	40			From ID 40 to ID 35, plastic.	☐
Reducer from ID 35 to ID 32	21	6.902-072.0	1 piece(s)	35			From ID 35 to ID 32, metal.	☐
Reduction/expansion adapter kit								
Set of reducers / adapter sleeves	22	2.860-117.0	1 piece(s)				ID 40/35, ID 35/32 (tube -> nozzle), plastic.	☐

■ Included in the scope of supply. □ Available accessories.

NT 75/2 AP ME TC

1.667-292.0



		Order no.	ID					Price	Description	
Target-group-specific accessory kits for vacuum cleaners										
Professional cleaning kit	1	2.637-353.0	DN 40						Professional cleaning kit.	☐
Car cleaning accessory kit	2	2.862-166.0	DN 35						Car cleaning kit.	☐
Swarf kit	3	2.640-760.0	DN 61						Swarf kit.	☐

■ Included in the scope of supply. ☐ Available accessories.

NT 75/2 AP ME TC
1.667-292.0



		Order no.	Anzahl	Breite			Price	Description	
Other									
Adapter connection, electroconductive	1	5.031-436.0							☐
CS 40 Me	2	2.863-026.0	1 piece(s)					Cyclone preseparator for use with wet and dry vacuum cleaners for very large quantities of dust.	☐

■ Included in the scope of supply. □ Available accessories.

NT 75/2 AP ME TC
1.667-292.0



		Order no.	Quantity	ID	Length	Width	Price	Description	
Modification kit, non-conductive media									
Attachment kit, non-conductive media Tact ² + Ap	1	2.642-602.0	1 piece(s)					For switching off when vacuuming non-conductive fluids such as oils and greases	☐

■ Included in the scope of supply. ☐ Available accessories.

NT 75/2 AP ME TC
1.667-292.0




		Order no.	Length	Colour	Quantity	Price	Description	
Miscellaneous								
Extension cable	1	6.647-022.0	20 m		1 piece(s)		Extension cable, 20 m, 3x1.5 mm ² . With splash-proof earthing pin plug, strain relief and anti-kink sleeve.	☐

■ Included in the scope of supply. ☐ Available accessories.

NT 75/2 AP ME TC

1.667-292.0

KÄRCHER



		Order no.	Flow rate	Inlet temperature	Length	Length	Price	Description	
Teleskopstangen									
Telescopic lance TL 10 H	1	4.762-611.0		max. 60 °C				Up to 10 m reach: hybrid telescopic lance TL 10 H. Comprising carbon-glass fibre mix and suitable for multifunctional use. Simple retraction and extension thanks to quick-release fasteners.	- ☐
Telescopic lance TL 10 C	2	4.762-612.0		max. 60 °C				Carbon fibre telescopic lance TL 10 C. With up to 10 m reach and practical quick-release fasteners. Multifunctional use for cleaning facades, windows or solar panels.	- ☐
TL vacuum cleaner adapter	3	9.751-306.0						TL suction cup for 10 and 14 m long telescopic lances comprising suction bend connection (DN 35, DN 40) and connection for the suction nozzles.	- ☐

■ Included in the scope of supply. □ Available accessories.

Authorized Distributor



Cleaning solutions for every need

NT 75/2 Ap Me Tc, 1.667-292.0, 2021-03-09