




Most powerful high-pressure cleaner of the HD Classic Range: HD 9/20-4 Classic with 900 l/h water flow, three-phase drive and crankshaft pump with ceramic piston. For long service intervals.



1 Durable and robust

- Extra large crankshafts and connecting rods with robust ball bearings.
- Ceramic pistons for reduced wear and tear.

2 Especially easy to maintain

- Wide-opening machine cover for easy access to all service and maintenance-relevant components.
- Large water fine filter for optimal protection of the pump.

3 Improved cleaning performance

- Patented Kärcher power flat jet nozzles: up to 40 percent more impact force than conventional nozzles.
- High area coverage and thorough dirt removal.

4 First-class mobility

- Large wheels and ergonomic push handle ensure optimal turning manoeuvrability and easy handling.
- The foldable push handle enables space-saving storage.



HD 9/20-4 Classic

- Durable crankshaft pump with ceramic-coated pistons
- Large, transparent water filter
- Continuous pressure regulation

Technical data

Order no.		1.367-308.0
EAN code		4039784913233
Supply voltage	Ph / V / Hz	3 / 400 / 50
Flow rate	l/h	520-900
Working pressure	bar / MPa	70-200 / 7-20
Max. pressure	bar	240
Max. water inlet temperature	°C	60
Connection load	kW	6.9
Weight	kg	56
Dimensions (L × W × H)	mm	700 × 455 × 1010

Equipment

Spray gun		Standard trigger gun
Pressure hose	m	10 / DN 8, 315 bar
Spray lance	mm	600
Power nozzle		■
Anti-twist system		■
Pressure cut-off		■
Servo Control		-
Crankshaft pump with ceramic pistons		■

■ Included in delivery.

Accessories for HD 9/20-4 Classic

1.367-308.0



		Order no.	Flow rate				Price	Description	
Trigger guns									
Standard trigger gun	1	9.751-045.0						High-pressure gun for machines of the HD Classic range. With adapter for high-pressure hoses M 22 × 1.5.	■

■ Included in delivery. □ Available accessories.

Accessories for HD 9/20-4 Classic

1.367-308.0



		Order no.	ID	Max. working pressure	Length		Price	Description	
Standard with unions on both sides									
High-pressure hose, 10m, DN 8	1	9.751-087.0						10m high-pressure hose (DN 8) with screw connections M 22 × 1.5 at both ends for connection to machines of the HD Classic range.	■

■ Included in delivery. □ Available accessories.

Accessories for HD 9/20-4 Classic

1.367-308.0



		Order no.	Nozzle size				Price	Description	
Power nozzle spray angle 25°									
Power nozzle spray angle 25°	1	2.883-894.0	47					Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	■

■ Included in delivery. □ Available accessories.

Accessories for HD 9/20-4 Classic

1.367-308.0



		Order no.	Max. working pressure	Length			Price	Description	
Spray lance									
600 mm spray lance	1	9.751-089.0						Zinc-coated spray lance with hand screw connection, 850mm Suitable for machines of the HD Classic range. Spray lance is non-rotatable.	■

■ Included in delivery. □ Available accessories.

Accessories for HD 9/20-4 Classic

1.367-308.0




		Order no.					Price	Description	
Coupling parts									
Articulated joint	1	6.987-705.0						This articulated joint with variable angle adjustment (up to an angle of 120°) is recommended for cleaning hard to reach areas. Fits directly on the spray lance.	☐

■ Included in delivery. ☐ Available accessories.

Accessories for HD 9/20-4 Classic

1.367-308.0

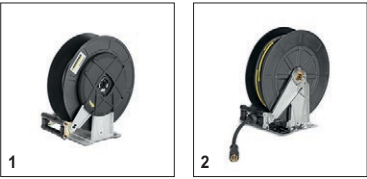


		Order no.	Length				Price	Description	
Automatic, self-winding hose reels									
Automatic hose reel, powder-coated steel / plastic	1	6.392-975.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	☐
Automatic stainless steel / synthetic material hose drum	2	6.392-965.0	20 m					Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	☐

■ Included in delivery. ☐ Available accessories.

Accessories for HD 9/20-4 Classic

1.367-308.0

KÄRCHER

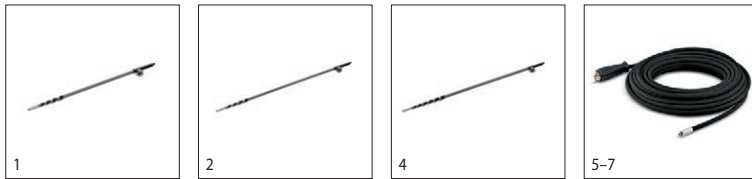

		Order no.	Flow rate	Water inlet temperature	Length	Length	Price	Description	
Solar cleaning – telescopic lances									
iSolar TL 7 H (without hose)	1	4.107-054.0		60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 7.2 m max. reach and practical quick-release couplings for easy extension and retraction.	☐
iSolar TL 10 H (without hose)	2	4.107-053.0		60 °C				Telescopic rod made from a carbon/fibreglass mixture for maximum rigidity with minimum weight. With 10 m max. reach and practical quick-release couplings for easy extension and retraction.	☐
iSolar TL 10 C (without hose)	3	4.107-055.0		60 °C					☐
iSolar TL 14 C (without hose)	4	4.107-052.0		60 °C				Full carbon telescopic rod for maximum rigidity with minimal weight. With 14 m max. reach and practical quick-release couplings for easy extension and retraction.	☐
iSolar HP hose 7	5	6.392-978.0		155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 7. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	☐
iSolar HP hose 10	6	6.392-977.0		155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 10. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	☐
iSolar HP hose 14	7	6.392-976.0		155 °C				High-quality, flexible HP hose (with rubber covering) for the iSolar TL 14. The outer layer has especially good sliding properties when extending and retracting the telescopic rod.	☐

■ Included in delivery. □ Available accessories.

Authorized Distributor



A : 712 Ansal Chamber II, 6 , Bhikaji Cama Place, New Delhi -110066

T : 9311677446/9350735062

W : www.delta-solutions.in

E : contact@delta-solutions.in