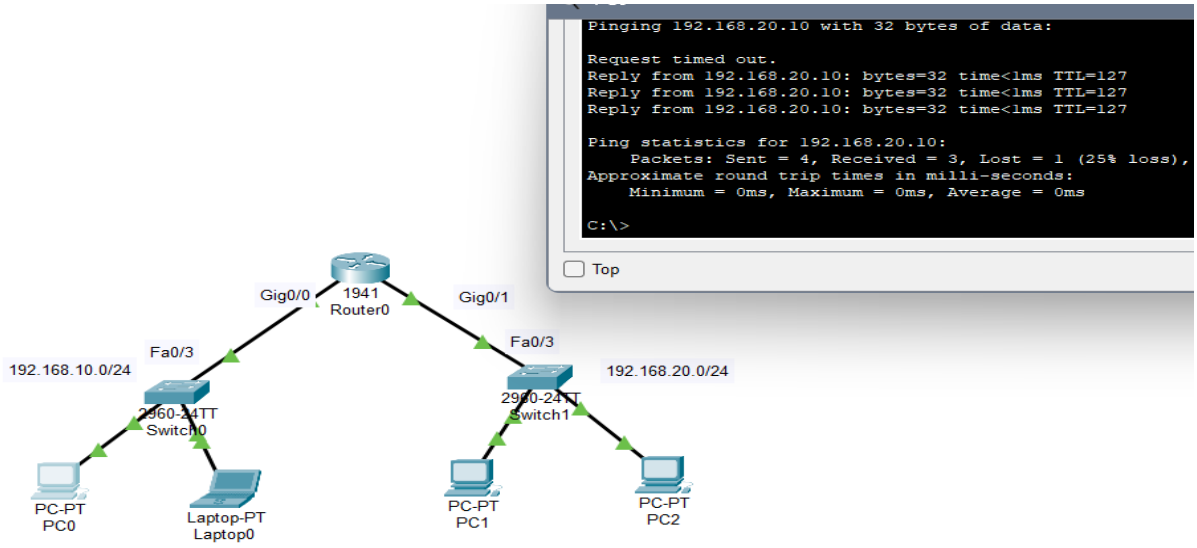


CCNA Practical Lab 2: Configure a Default Gateway and tester Inter-Network Communication

Objective: understand why a router and default gateway are needed to communicate between different IP networks.

Topology: laptop0**,** PC0 — Switch0 — Router0 — Switch1 — PC1,PC2

IP Configuration:

- Ip network : 192.168.10.0/24
- Ip network : 192.168.20.0/24
- Subnet Mask: 255.255.255.0

Short Explanation: Different network cannot communicate directly so using router to communicate

CLI:
Enable
configure terminal
interface Ethernet Gig0/0 192.168.10.1 255.255.255.0
no shutdown
exit
interface Ethernet Gig0/1 192.168.20.1 255.255.255.0
no shutdown
end

Result: 3 packet successfully received

What I Learned: configure gateway, set gateway in pc