

Reentry Mission Operations Control Room



Manual version 0.8093.0-git (for MOCR / "MOCRL" version 0.77)

This manual isn't necessarily realistic, and is not crew-rated.

[PDF-version](#)


This manual assumes you have already read the MCC-manual

Note: This feature is currently TP-only


Controls

Voice chat

MOCR has built in support for voice-chat. Voice-chat is not enabled by default at the moment, but is enabled by pressing the -icon in the upper right of the intercom

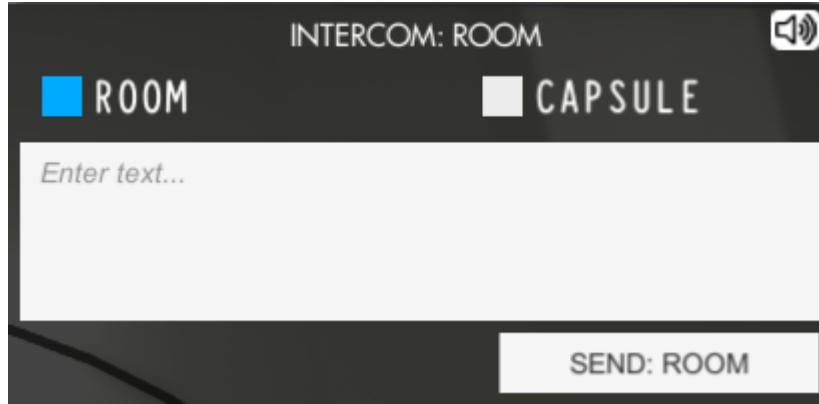

When you do this, a few things will come up:

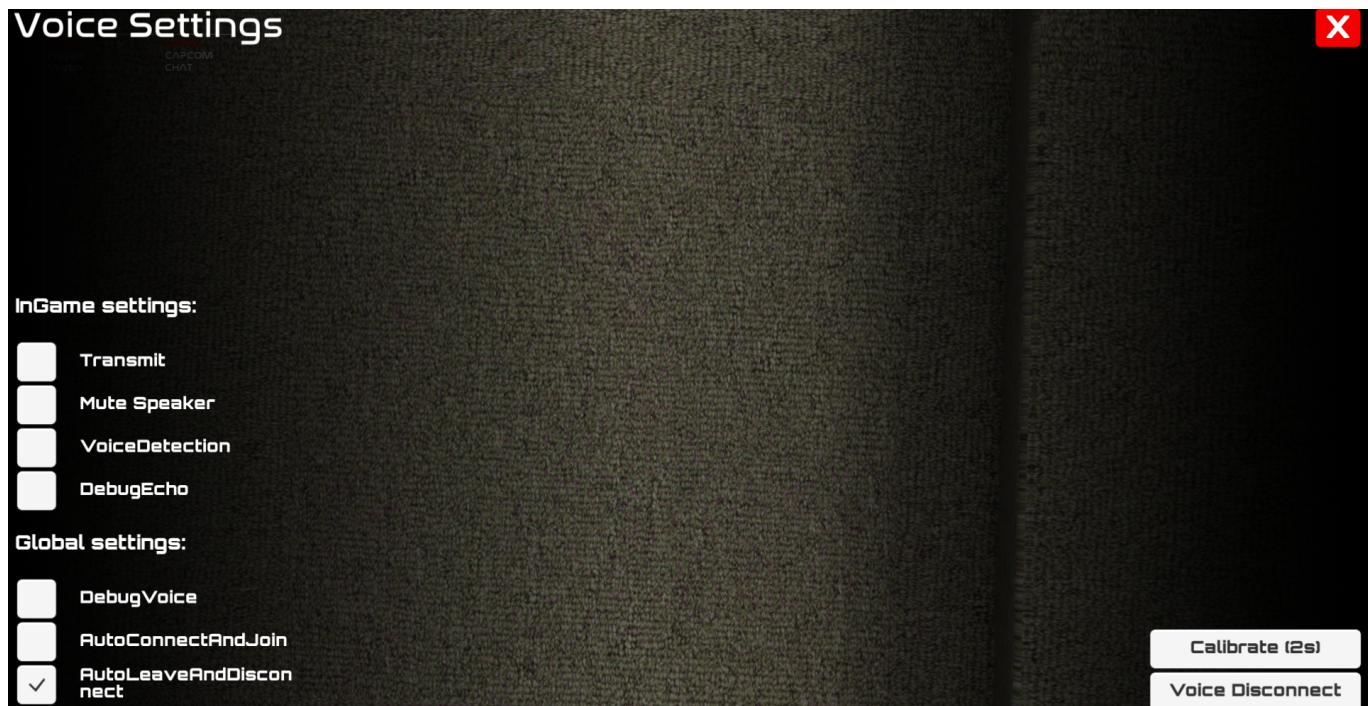

1. In the lower right, you'll see a button marked **VOICE CONNECT**. If you want to hear from or speak to the other players in the session, you need to click this. If the button is marked "Voice Disconnect", you're already set for the next step.
2. InGame settings. Here you need to click **Transmit**. Secondly, if you don't want to use Push To Talk (PTT), you need to select VoiceDetection. Note that VoiceDetection might not be enabled in the current build.

You should now be setup for receiving, and optionally transmitting voice.

Now for the next step: Who do you want to listen to, and who do you want to talk to. In order to select this, you need to find a console. The quickest way to do this, is to use the view-selector. If you can't see the View-selector on the left of your screen, press V. Make sure to select a console that's not already crewed.



The exact layout of the voice-setup buttons varies by console, but the generally setup is the same. The **yellow** buttons indicate what you're listening to. A lit indicator indicates that you're listening to that loop. Additionally, make sure that PABX and PABX ON are both lit. In the above example, I'm only listening to the A/G loop (Air / Ground). The **white** buttons are used to select which loop you talk into, when you talk. A blinking white indicator indicates that a given loop is selected for speaking into.



In the above example you I've chosen to listen to all loops, and speaking to the A/G loop.



In the above example on the other hand, I've chosen to only listen to the assistant flight director and the flight director loops, and to speak on the assistant flight loop.

Views



Console description can be found at: [HERE](#)

See also:


- [NASA: This Is Mission Control - 1970 - CharlieDeanArchives / Archival Footage](#)

CAPCOM

FAO

PAO

BOOSTER

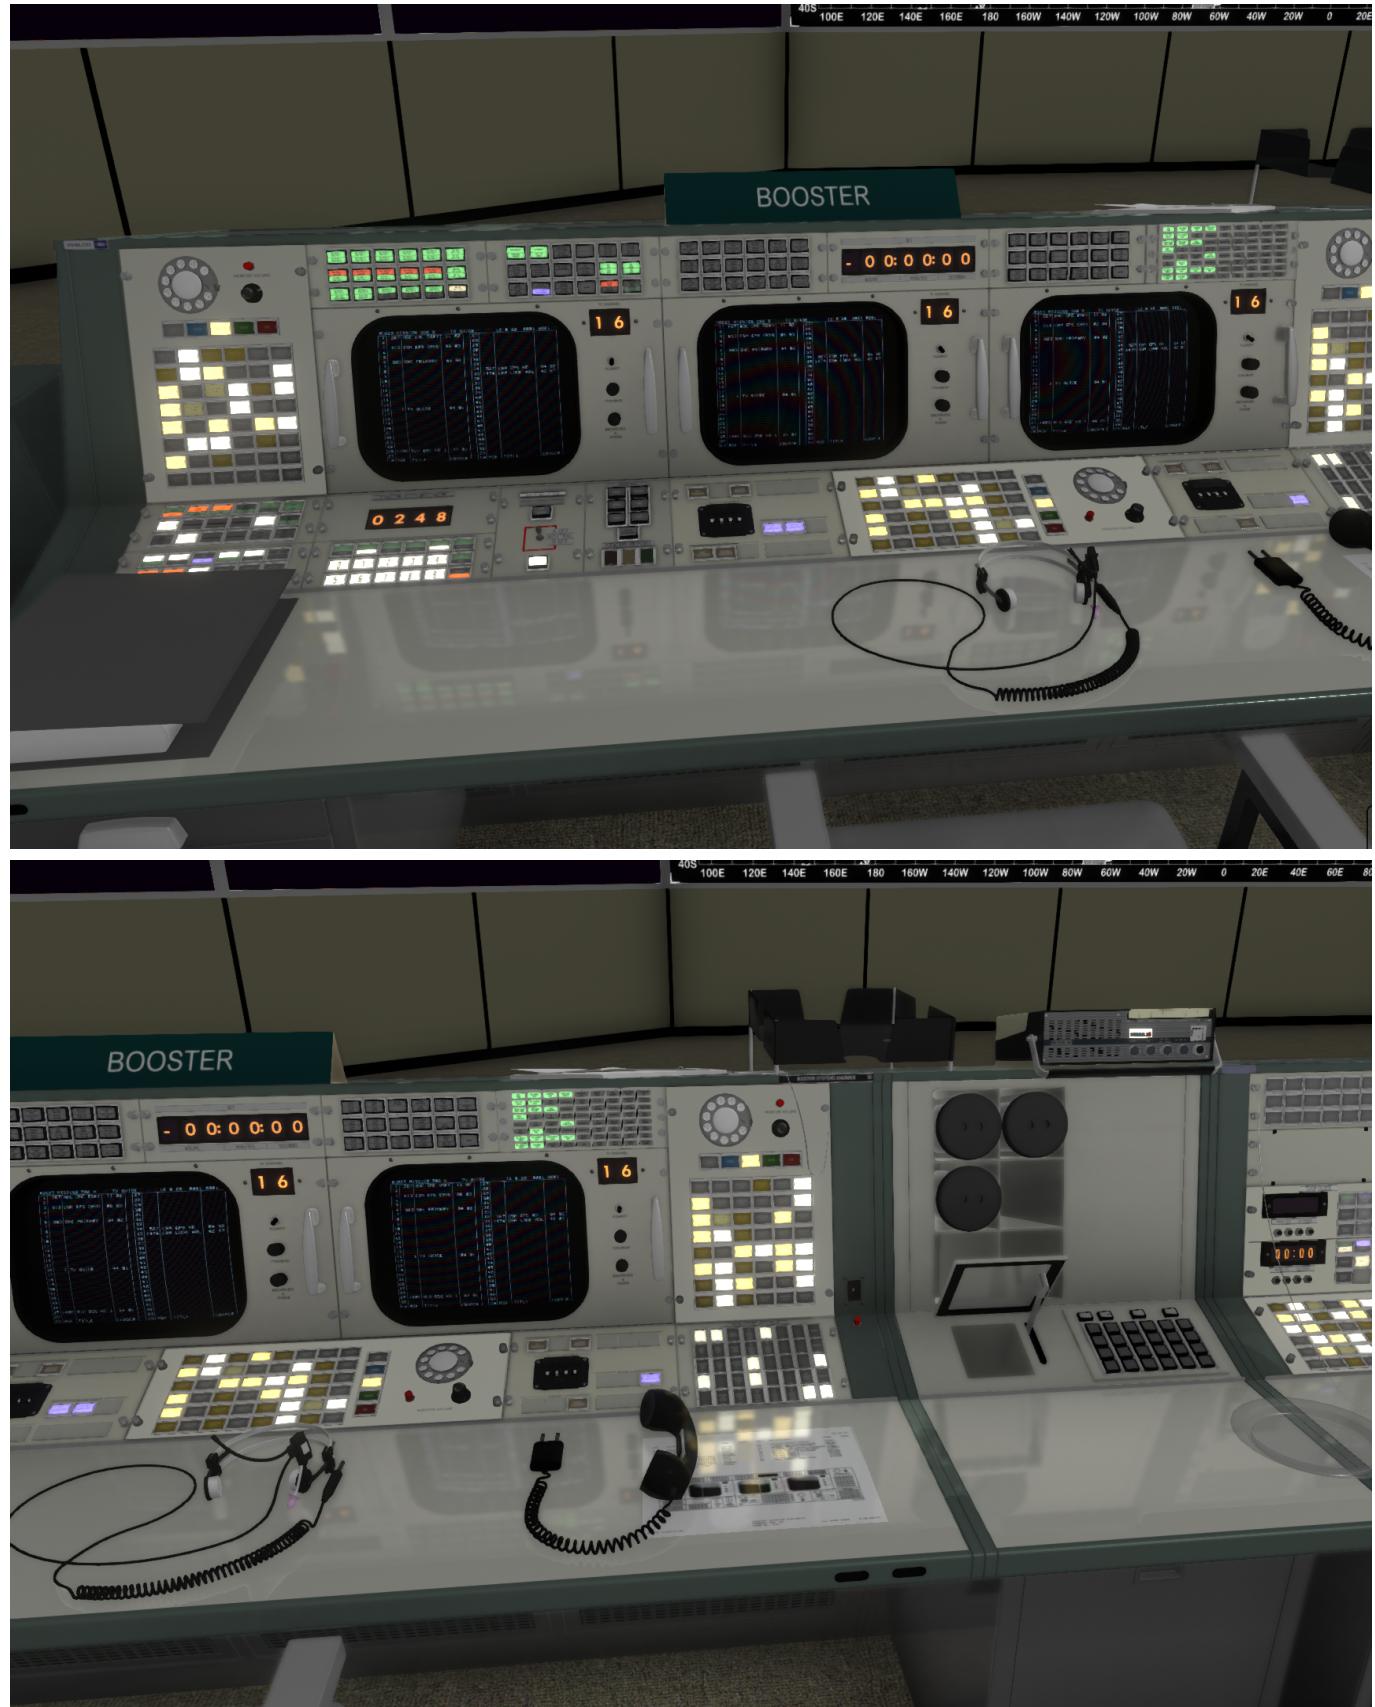


Booster is responsible for monitoring the Saturn up to and including LV separation. Booster has three screens to keep a track of everything. Left and center is controlled through one set of dials, right is controlled through a second set.

RETRO



FDO


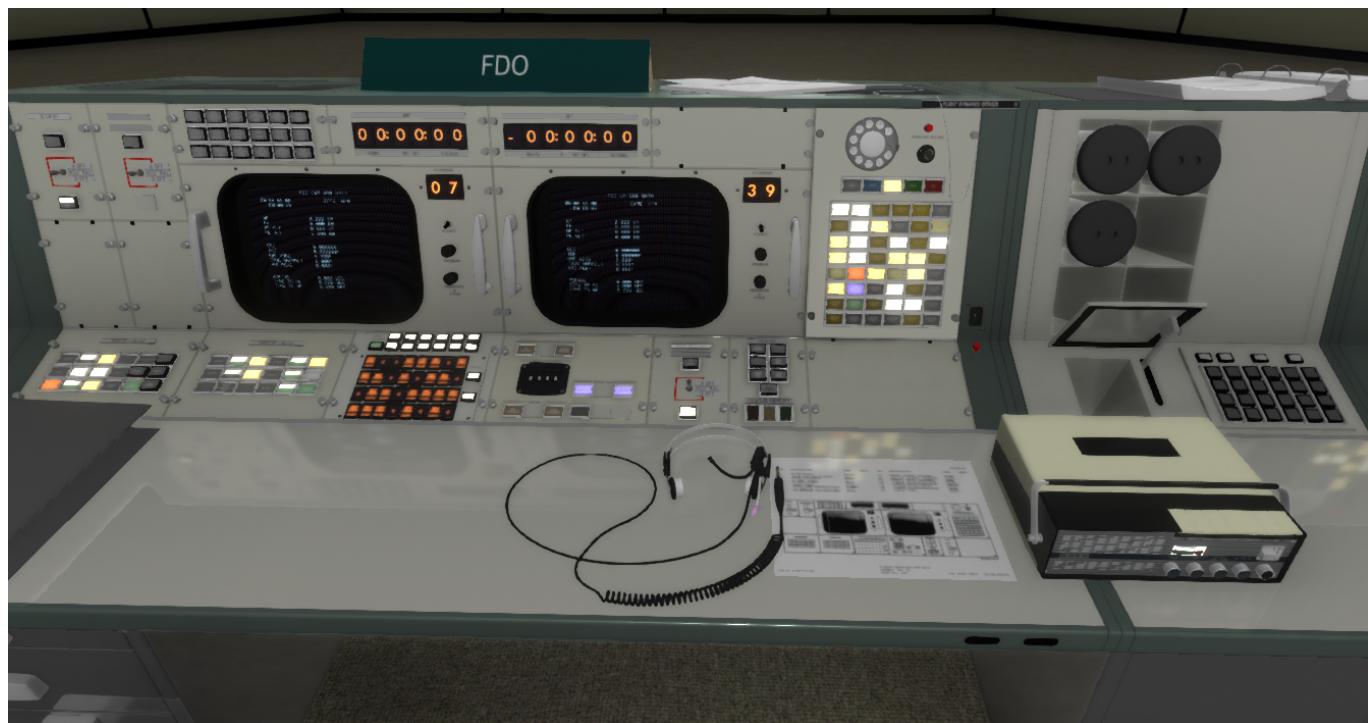


GUIDANCE



Flight Director

The flight director role is mostly the same as in Mercury. This includes holding or proceeding the count.

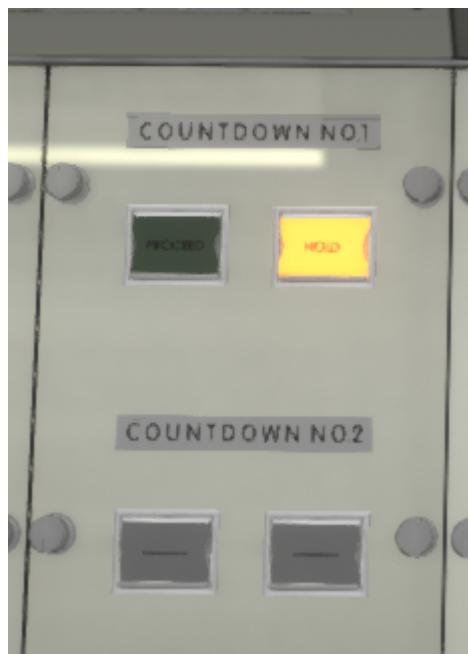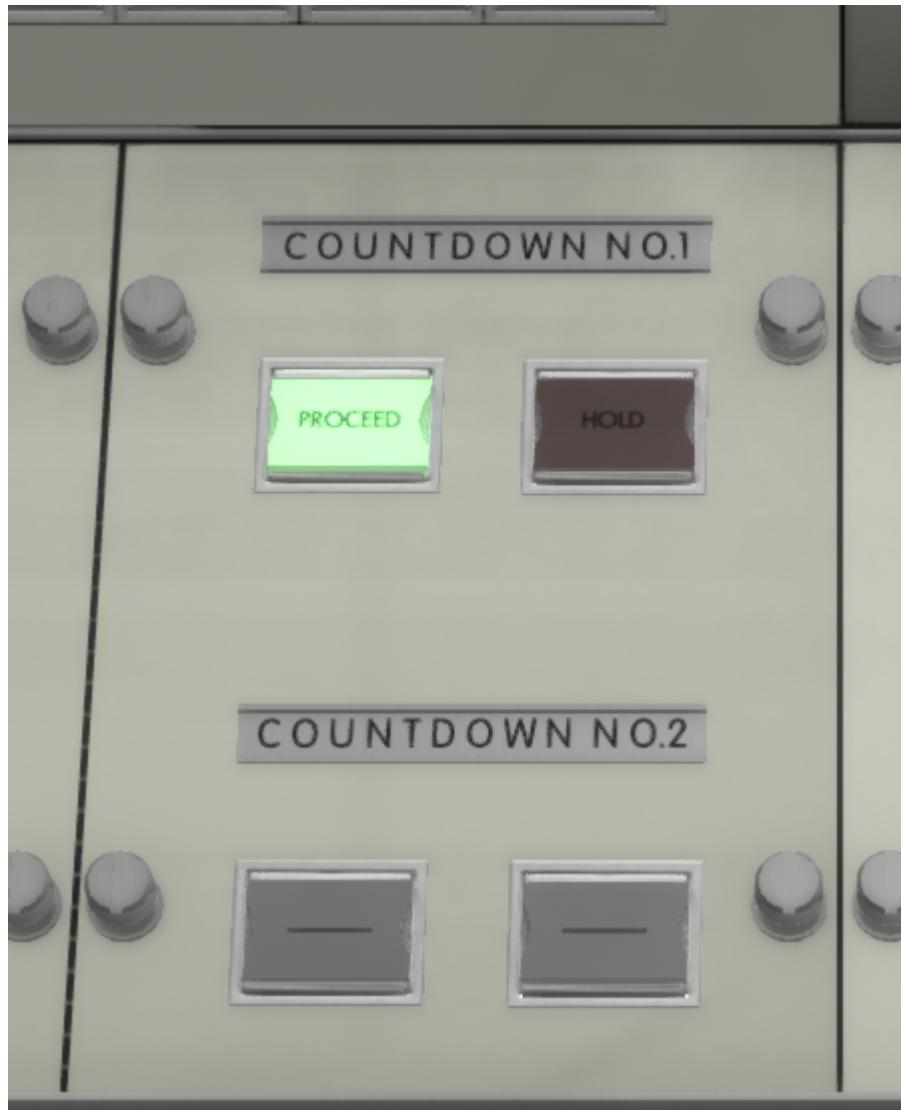

Assistant Flight Director

The assistant flight director role, as the name implies to assist the flight director. In addition, they have the responsibility of selecting what should be shown on the . This is done in a similar way to selecting content for the small screens (See [Screens](#)), with the addition of a few buttons to select the projectors.

Big screens

Left to right

1. LEFT PROJ TV
2. CENTER LEFT PROJ TV
3. MAIN PROJ SCREEN
4. AUX PROJ SCREEN
5. RIGHT PROJ TV

Screens

Each console has a number of 14" screens. With these you can look at a number of channels with various data. One way of selecting the data to be shown is to use TV-mode.

To select a TV-mode channel:

1. Press TV mode
2. Select the channel with the appropriate input selector, depending on which screen you want to put it on. If you're unsure of which channel you want, select [TV-guide \(channel XX\)](#).
3. Now one or more buttons should light up, depending on how many screens controlled by that input selector. Press the relevant screen by pushing selecting it under "ENTER".

TV channels

(01) CMC DSKY AND STATE BUFF MON (AGC CMC DSKY)

This screen shows the CMC DSKY (CSM AGC DSKY), and various AGC state.

(03) (CSM EPS CRYO)



(06) CSM GNC PRIMARY TAB (GNC PRIMARY)

(07) (FDO CSM ORB)

(14) (SPS BURN MON)


(16) TV GUIDE

M0625 MISSION 586 U			
1	267 AGC CMC DSKY	TU GUIDE	12.0.20 0001 0001
2		11 02	
3	613 CSM EPS CRYO	06 03	44 01 04 02
4			
5			
6	983 GNC PRIMARY	04 02	
7	46 FDO CSM ORB	45 81	
8			
9			
10			
11			
12			
13			
14	253 SPS BURN MON	45 81	04 02
15			42 07
16	1 TU GUIDE	04 01	04 02
17			37 17
18			
19			
20			
21			
22			
23			
24			
25	1402 SLV BSE NO 1	44 01	45 91
26	CH MSK TITLE	CONSCR	
		CH MSK TITLE	CONSCR

This channel shows you a listing of what's on each channel. This listing is split in two, with three columns each showing the channel number, a description, and an identifier.

(25) SLV BSE NO 1

(27) (LM DSKY)

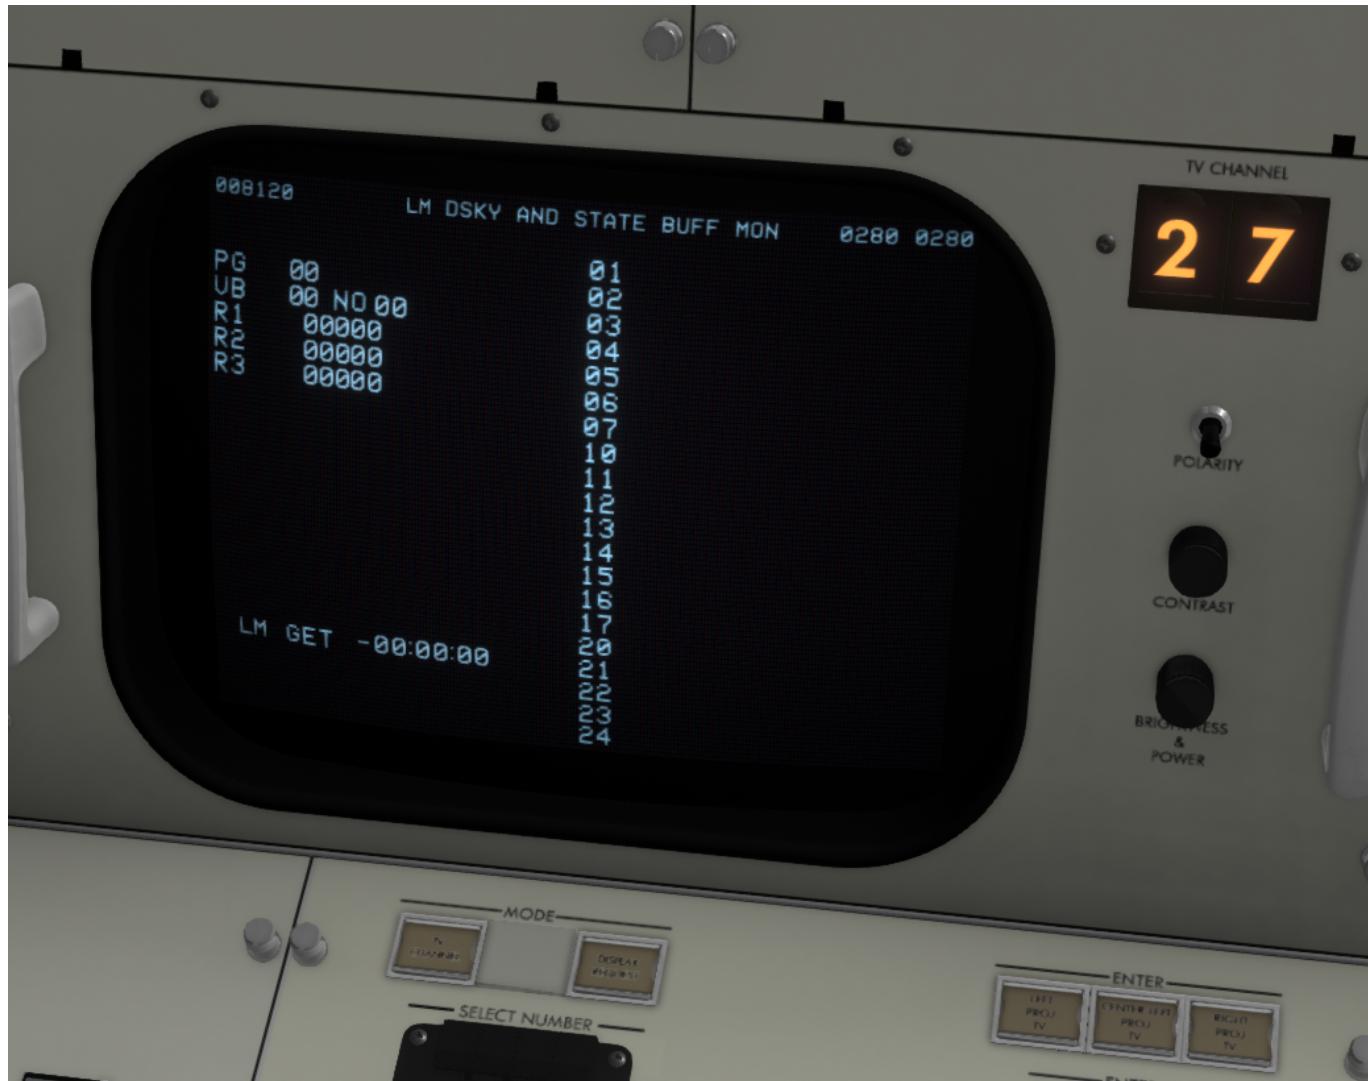

This is the LM-equivalent of [AGC CMC DSKY \(channel 01\)](#)


(28) (LM EECOM)



(34) (CSM EPS HD)


(35) (CSM LOOK AGL)

(36) (LM ECS)

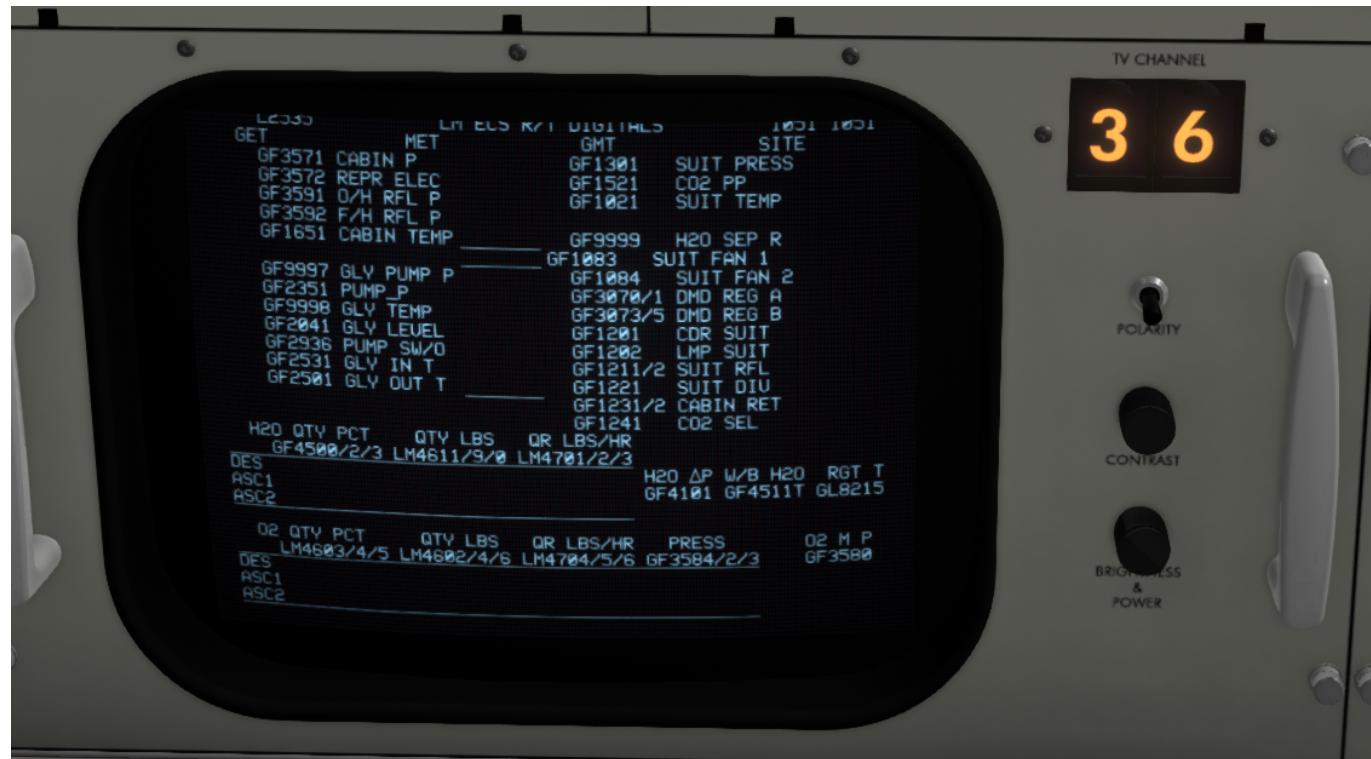


(37) (LM LOOK AGL)


(39) (FDO LM ORB)

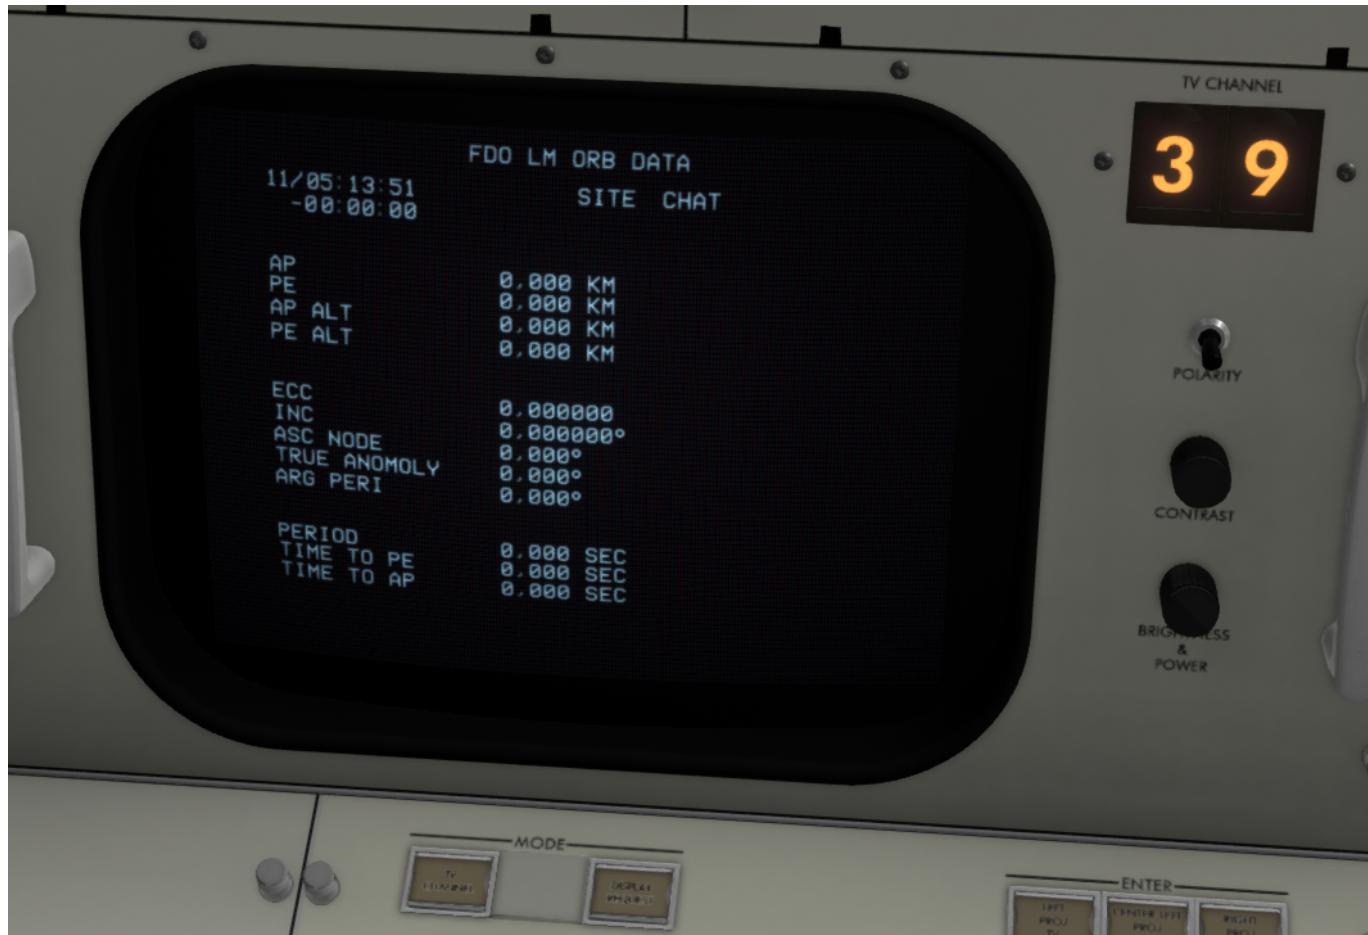


(44) (LM ELECT/INST)

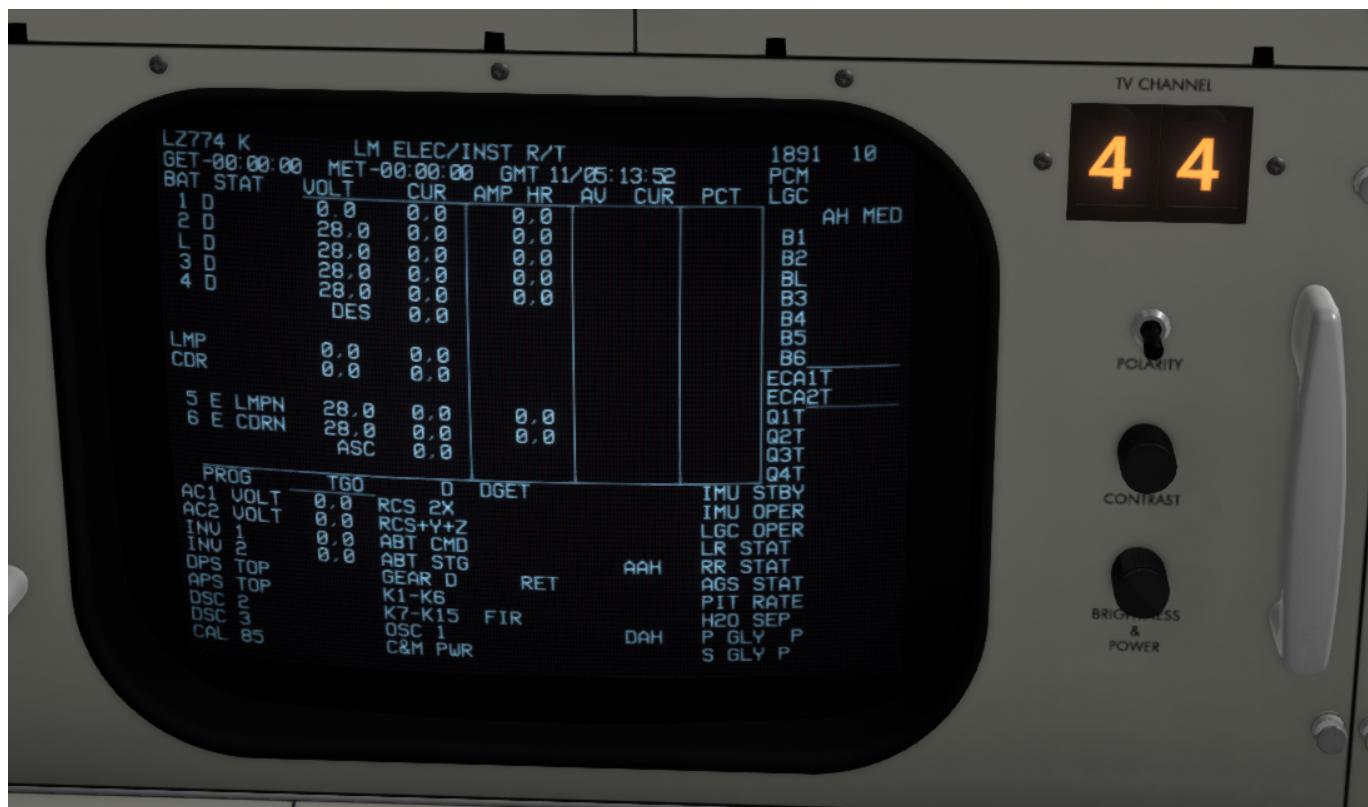

(45) (LM GUID CONT)

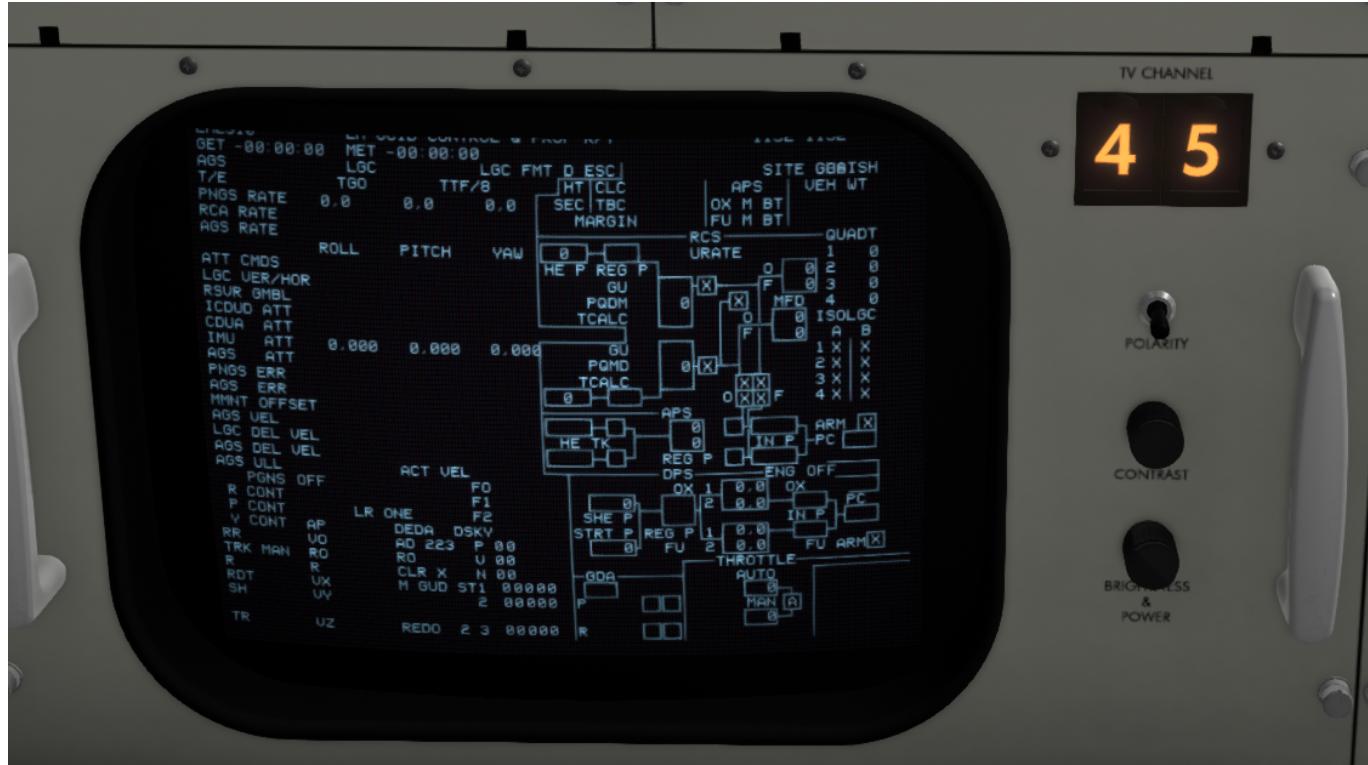

(47) (LM AGS)

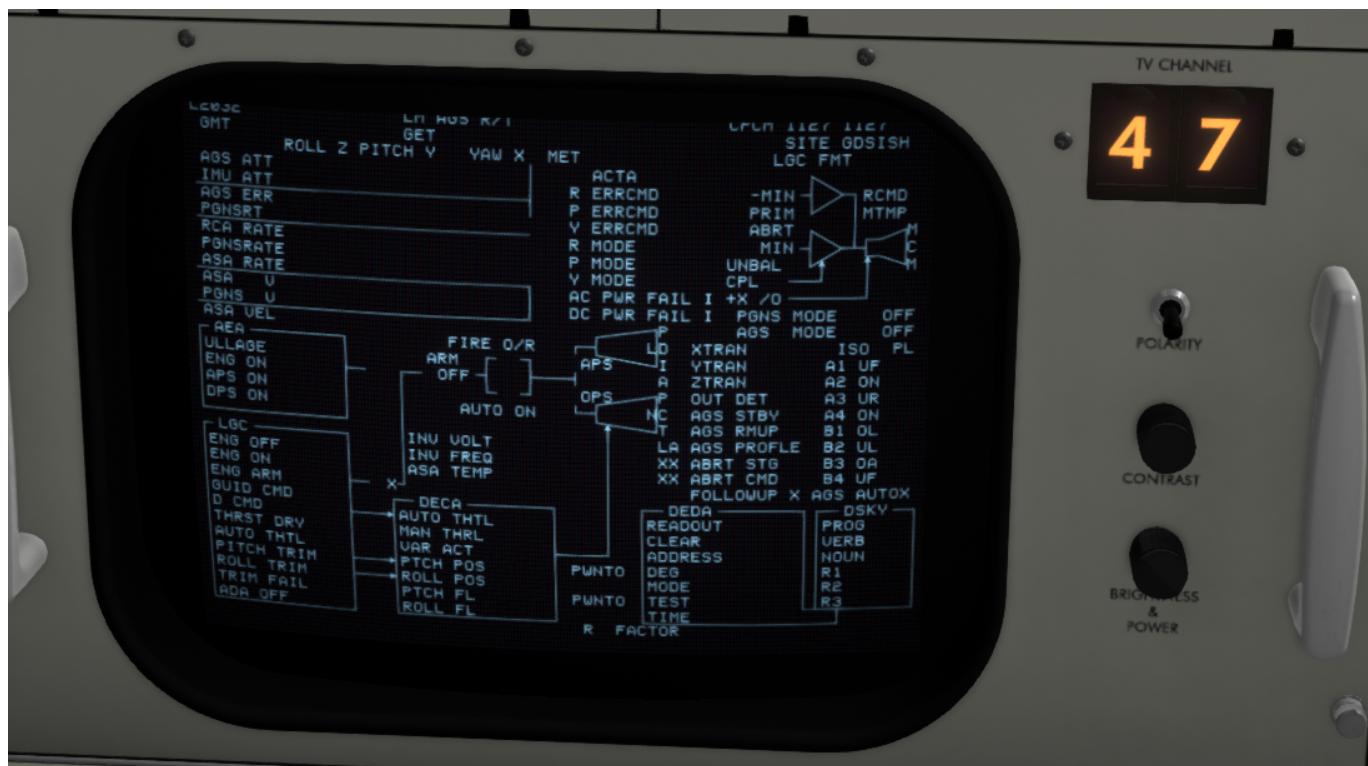

(90) RTCC

See section [RTCC](#)

RTCC

NASAs Real-Time Computing Complex, which resides at the first floor of building 30, the same building that houses MOCR 1 and 2, houses 5 IBM 360/75 computers, of which at any time 2 are used redundantly (1 active,

1 hotswap) to support the flight, while the others are used for sims, experiments, etc, and can be swapped in to replace one of the two flight support computers. Data from the RTCC is primarily fed into the display control system, including the television slide display, which is responsible for controlling the overlays used in the above-mentioned TV-system.

To access RTCC programs, you must first:

1. Be in a console that supports RTCC data. This includes [BOOSTER](#) and [GUIDANCE](#)
2. Select the [RTCC TV-channel \(channel 90\)](#)
3. Press the LOAD/INITIATE button (upper half)
4. Using the keyboard below it, enter the four-digit load-line for the program you want to access (XXXX for program guide)
5. Now press the INITIATE part of the previously mentioned button
6. It should now show the selected load-number.

To input a line of data, do the same thing, but with LINE/INITIATE instead

In the case of GUIDANCE you use the left keyboard to input load-numbers and to input a line, and the right keyboard for DSKY inputs.




RTCC program guide


Program guide

DSKY

SPS burn program

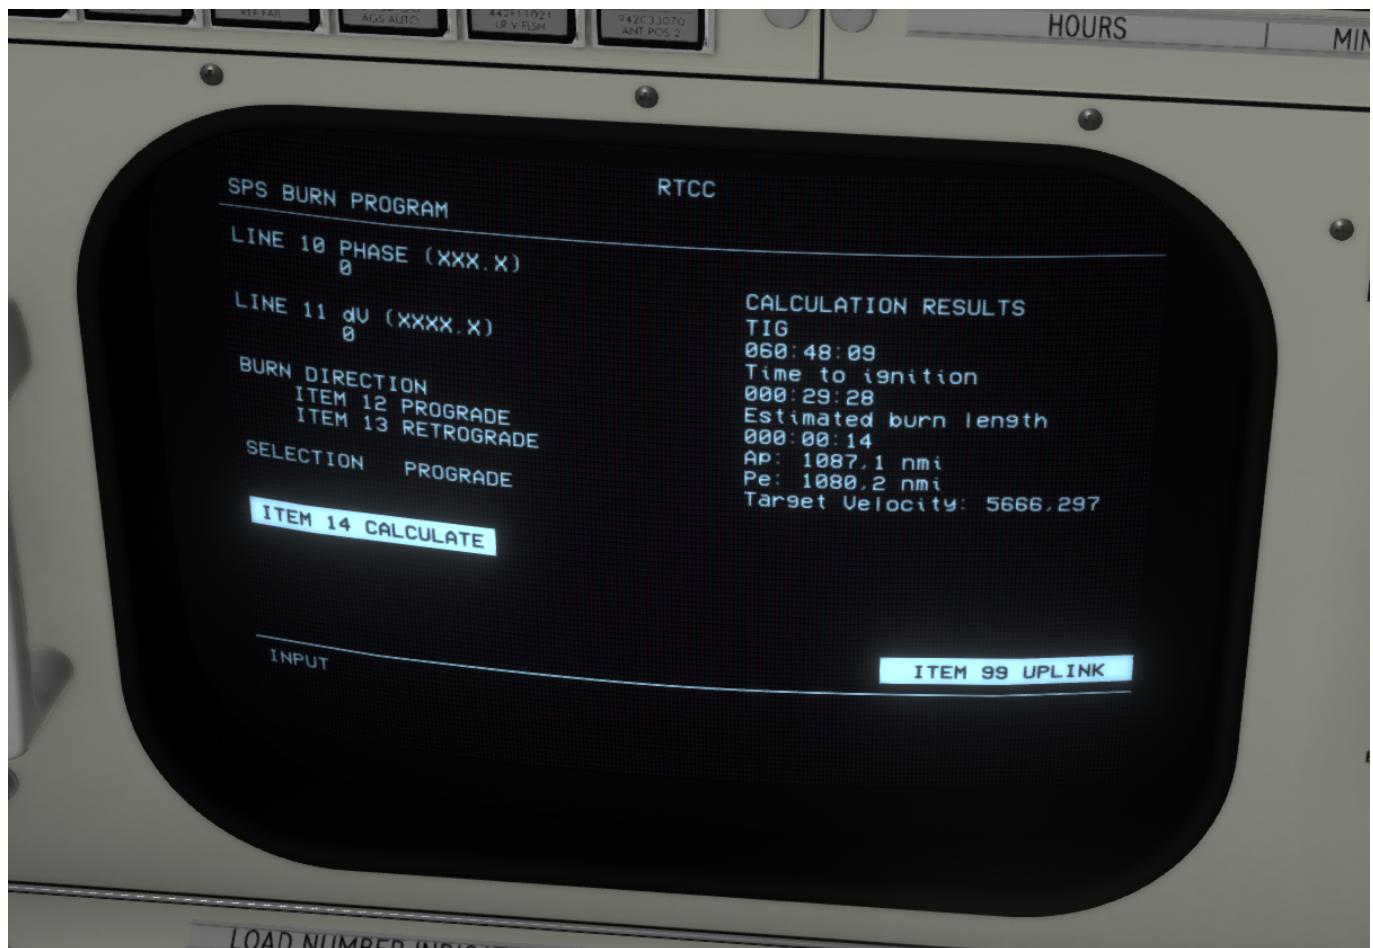

Room settings

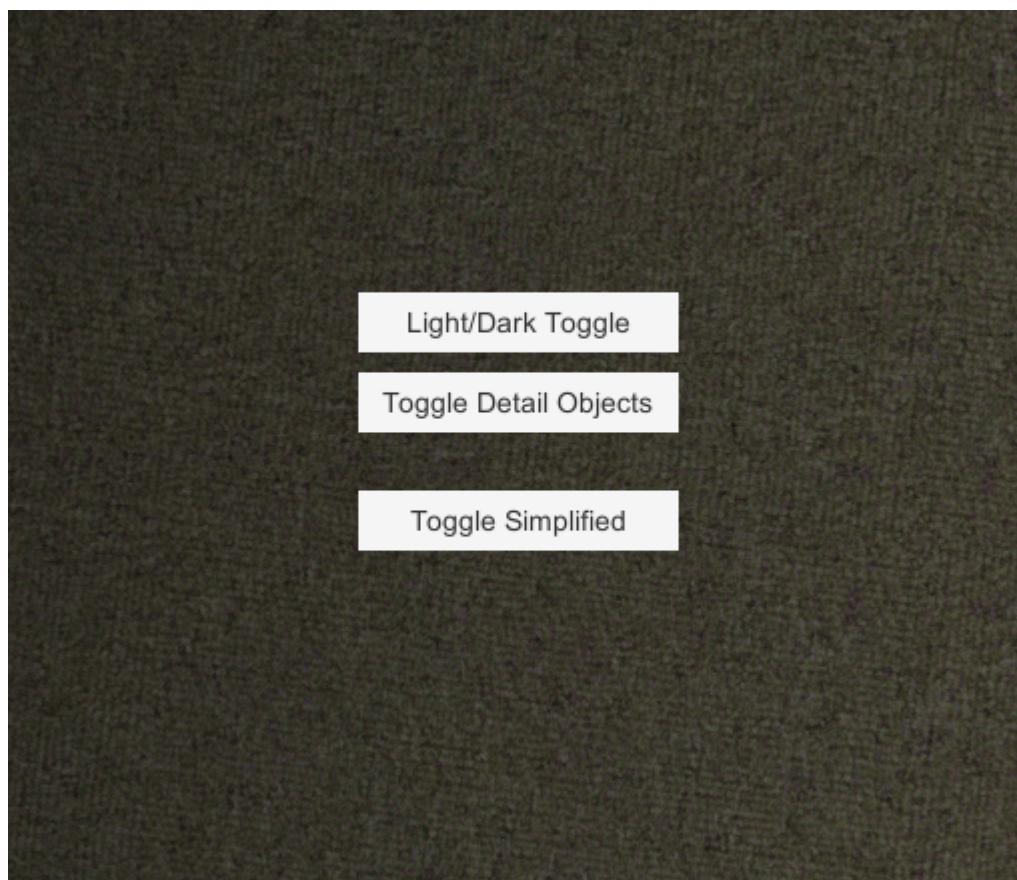

This menu-options lets you switch between light/dark, toggle detail-objects, and toggle the simplified view, all of whom may increase your performance

Other

IDRK where to put it, but there's a clock some where that can count up or down, and prob take the number from somewhere IDK

Also, troublemakers are a thing, basically the same as before (though now a real-life trouble-maker can do annoying things on voice).