

Fusion Touch-UI

Sheet 1	Table of Contents
Sheet 2	System Diagram
Sheet 3	B2B
Sheet 4	Power
Sheet 5	STM32N645 Power
Sheet 6	STM32N645 IO
Sheet 7	QSPI - Flash
Sheet 8	Display
Sheet 9	Debug
Sheet 10	B2B - Fan and Logo
Sheet 11	Revision History

U_Fusion_Touch-UI_System
Fusion_Touch-UI_System.SchDoc

U_Fusion_Touch-UI_RevisionHistory
Fusion_Touch-UI_RevisionHistory.SchDoc



Title: Fusion_Touch-UI_ToC.SchDoc		
Size: A	Part Number: A01603-0010	Revision: 1.0
Date: October 15, 2025	Sheet: 1	of: 11
Drawn By: ALock	Checked By:	

A


B

C


D

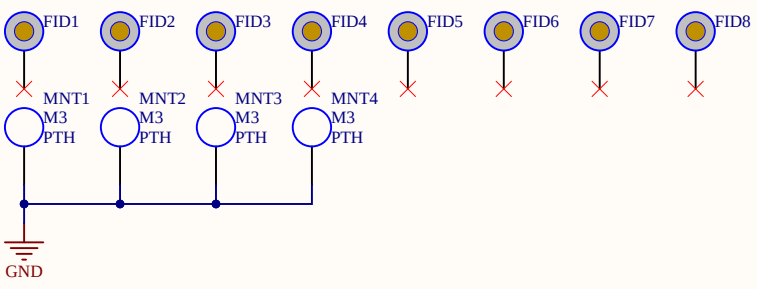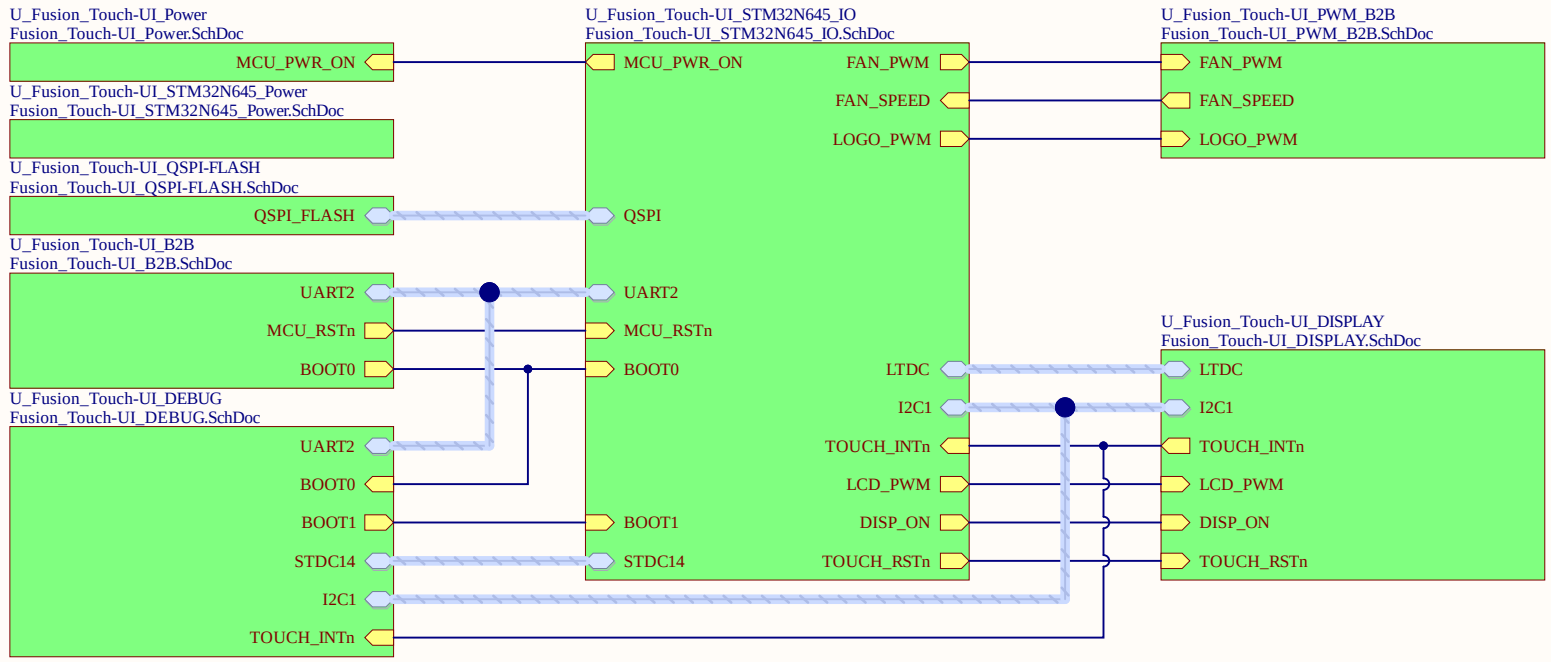



Title: Fusion_Touch-UI_System.SchDoc		
Size: A	Part Number: A01603-0010	Revision: 1.0
Date: October 15, 2025	Sheet: 2 of: 11	
Drawn By: ALock	Checked By:	

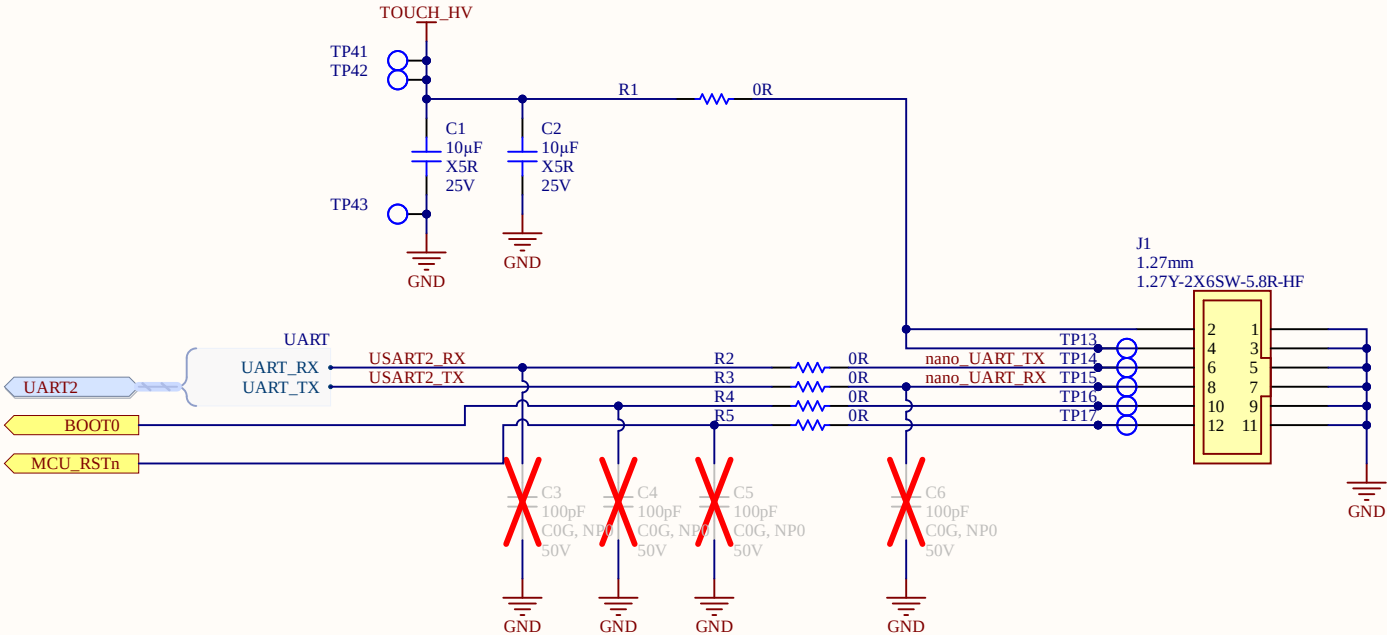

Title: Fusion_Touch-UI_B2B.SchDoc		
Size: A	Part Number: A01603-0010	Revision: 1.0
Date: October 15, 2025	Sheet: 3	of: 11
Drawn By: ALock	Checked By:	

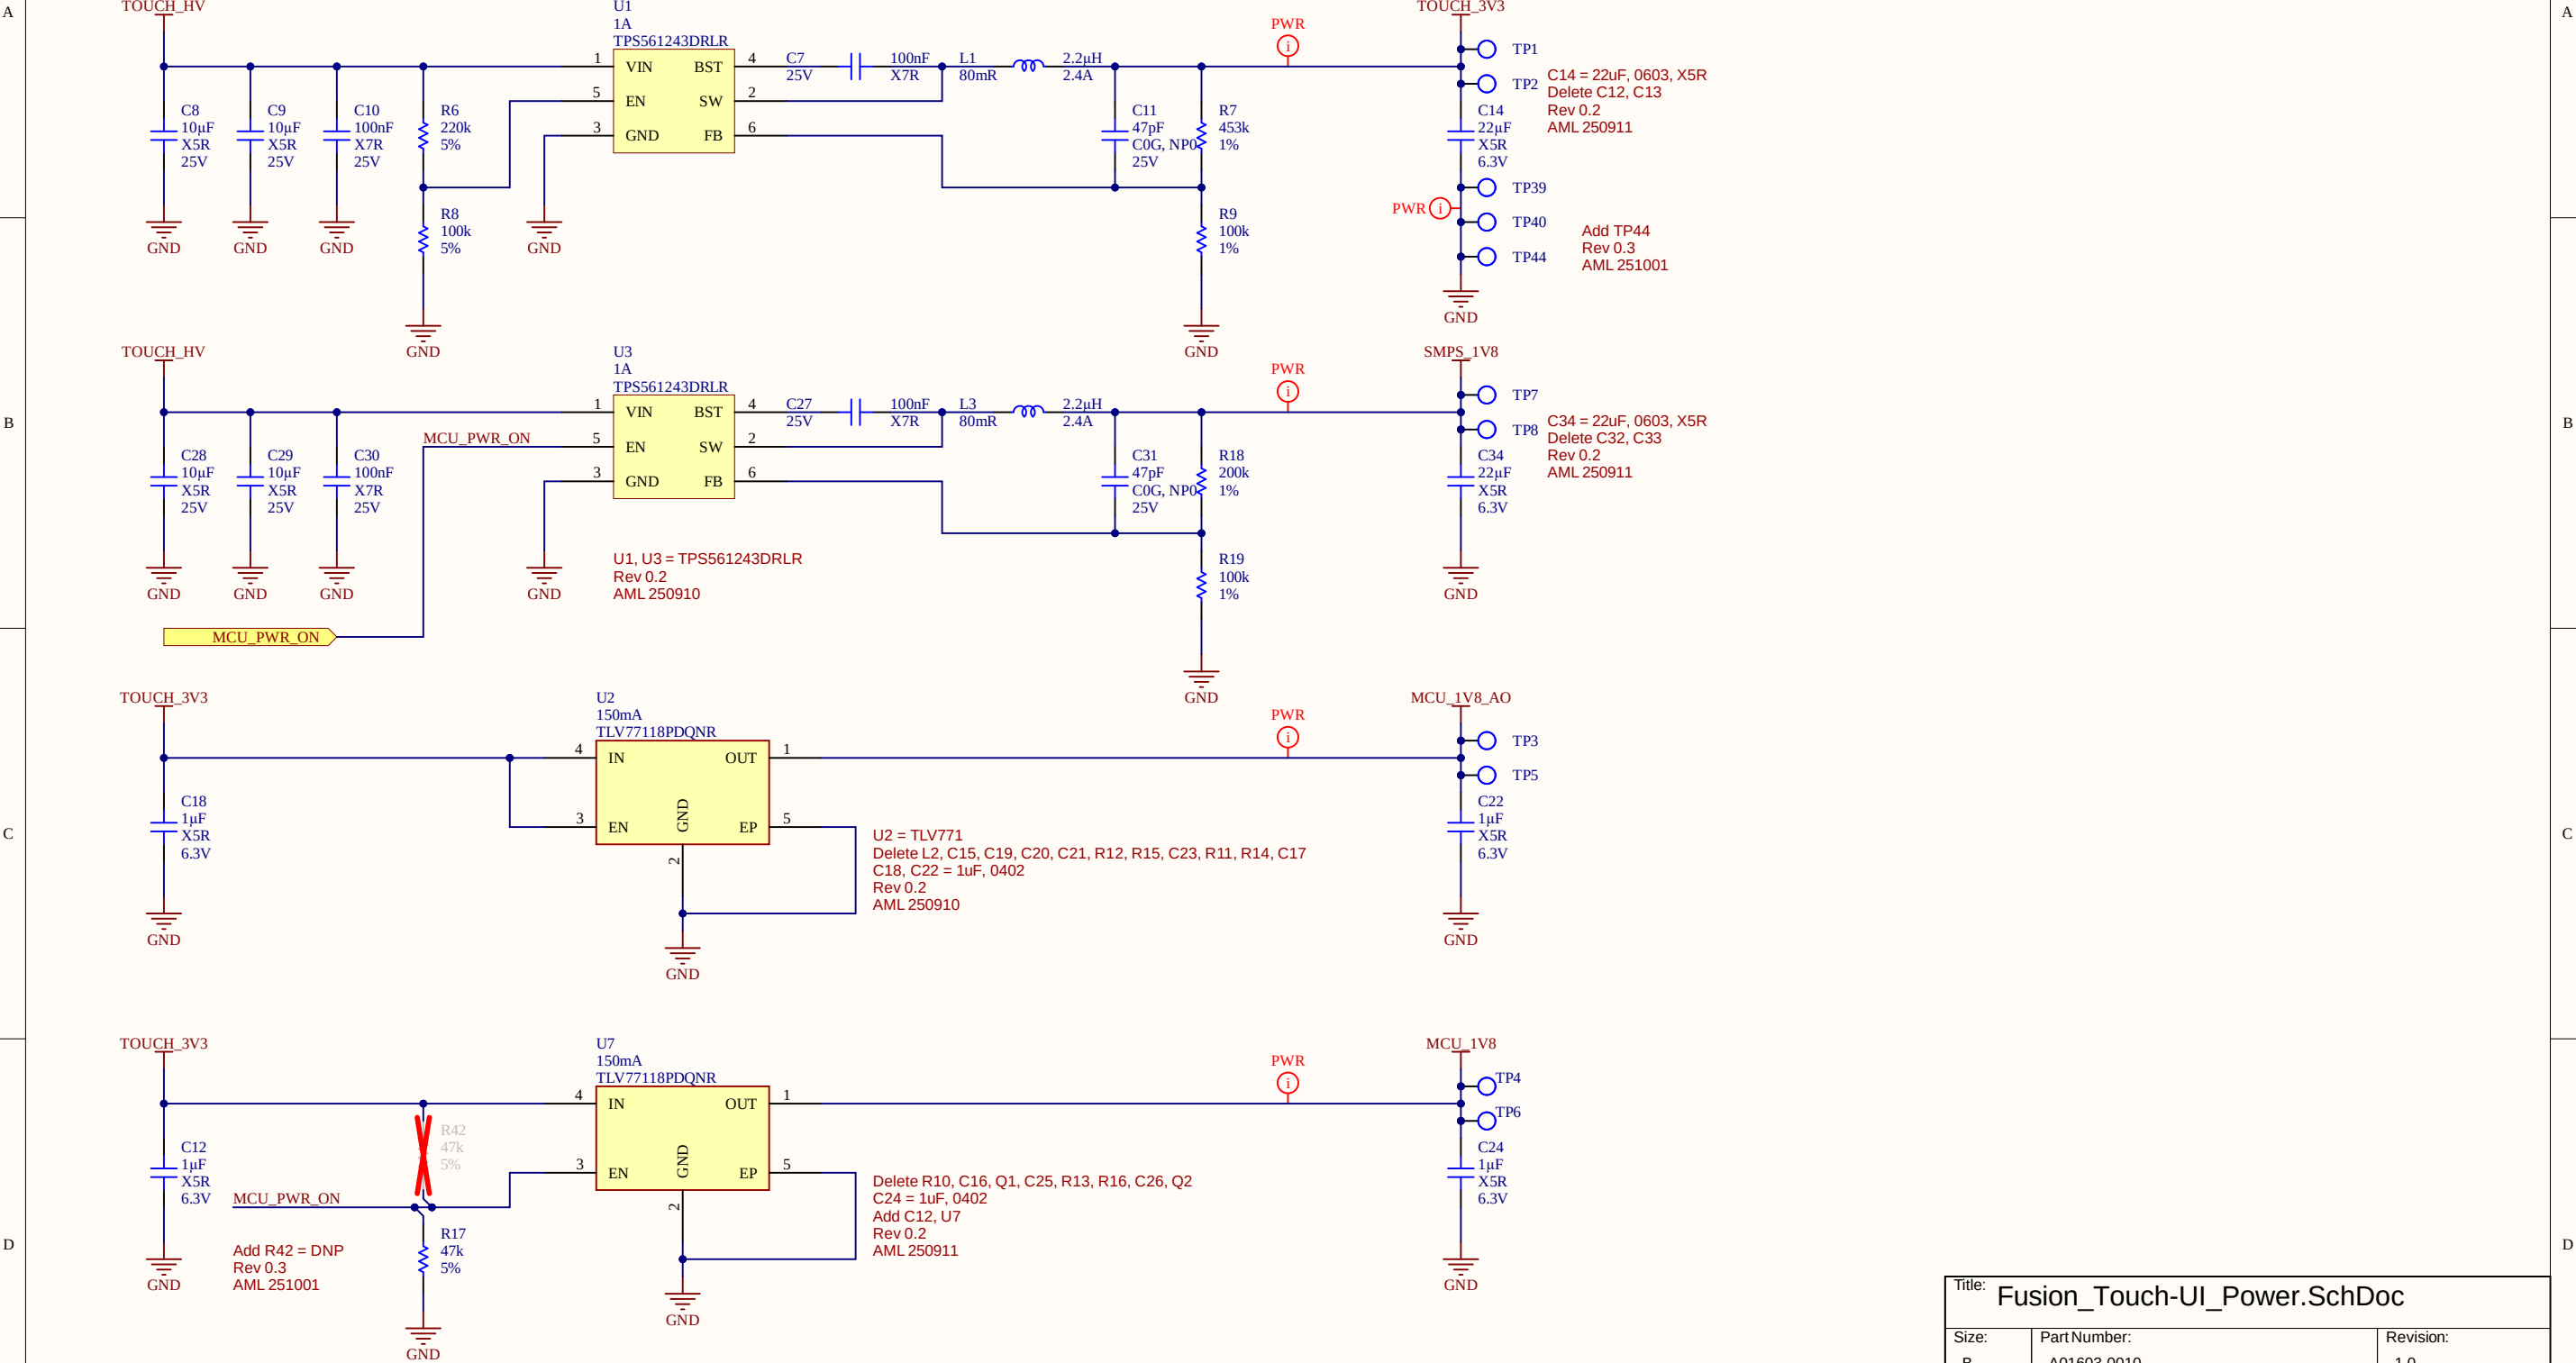

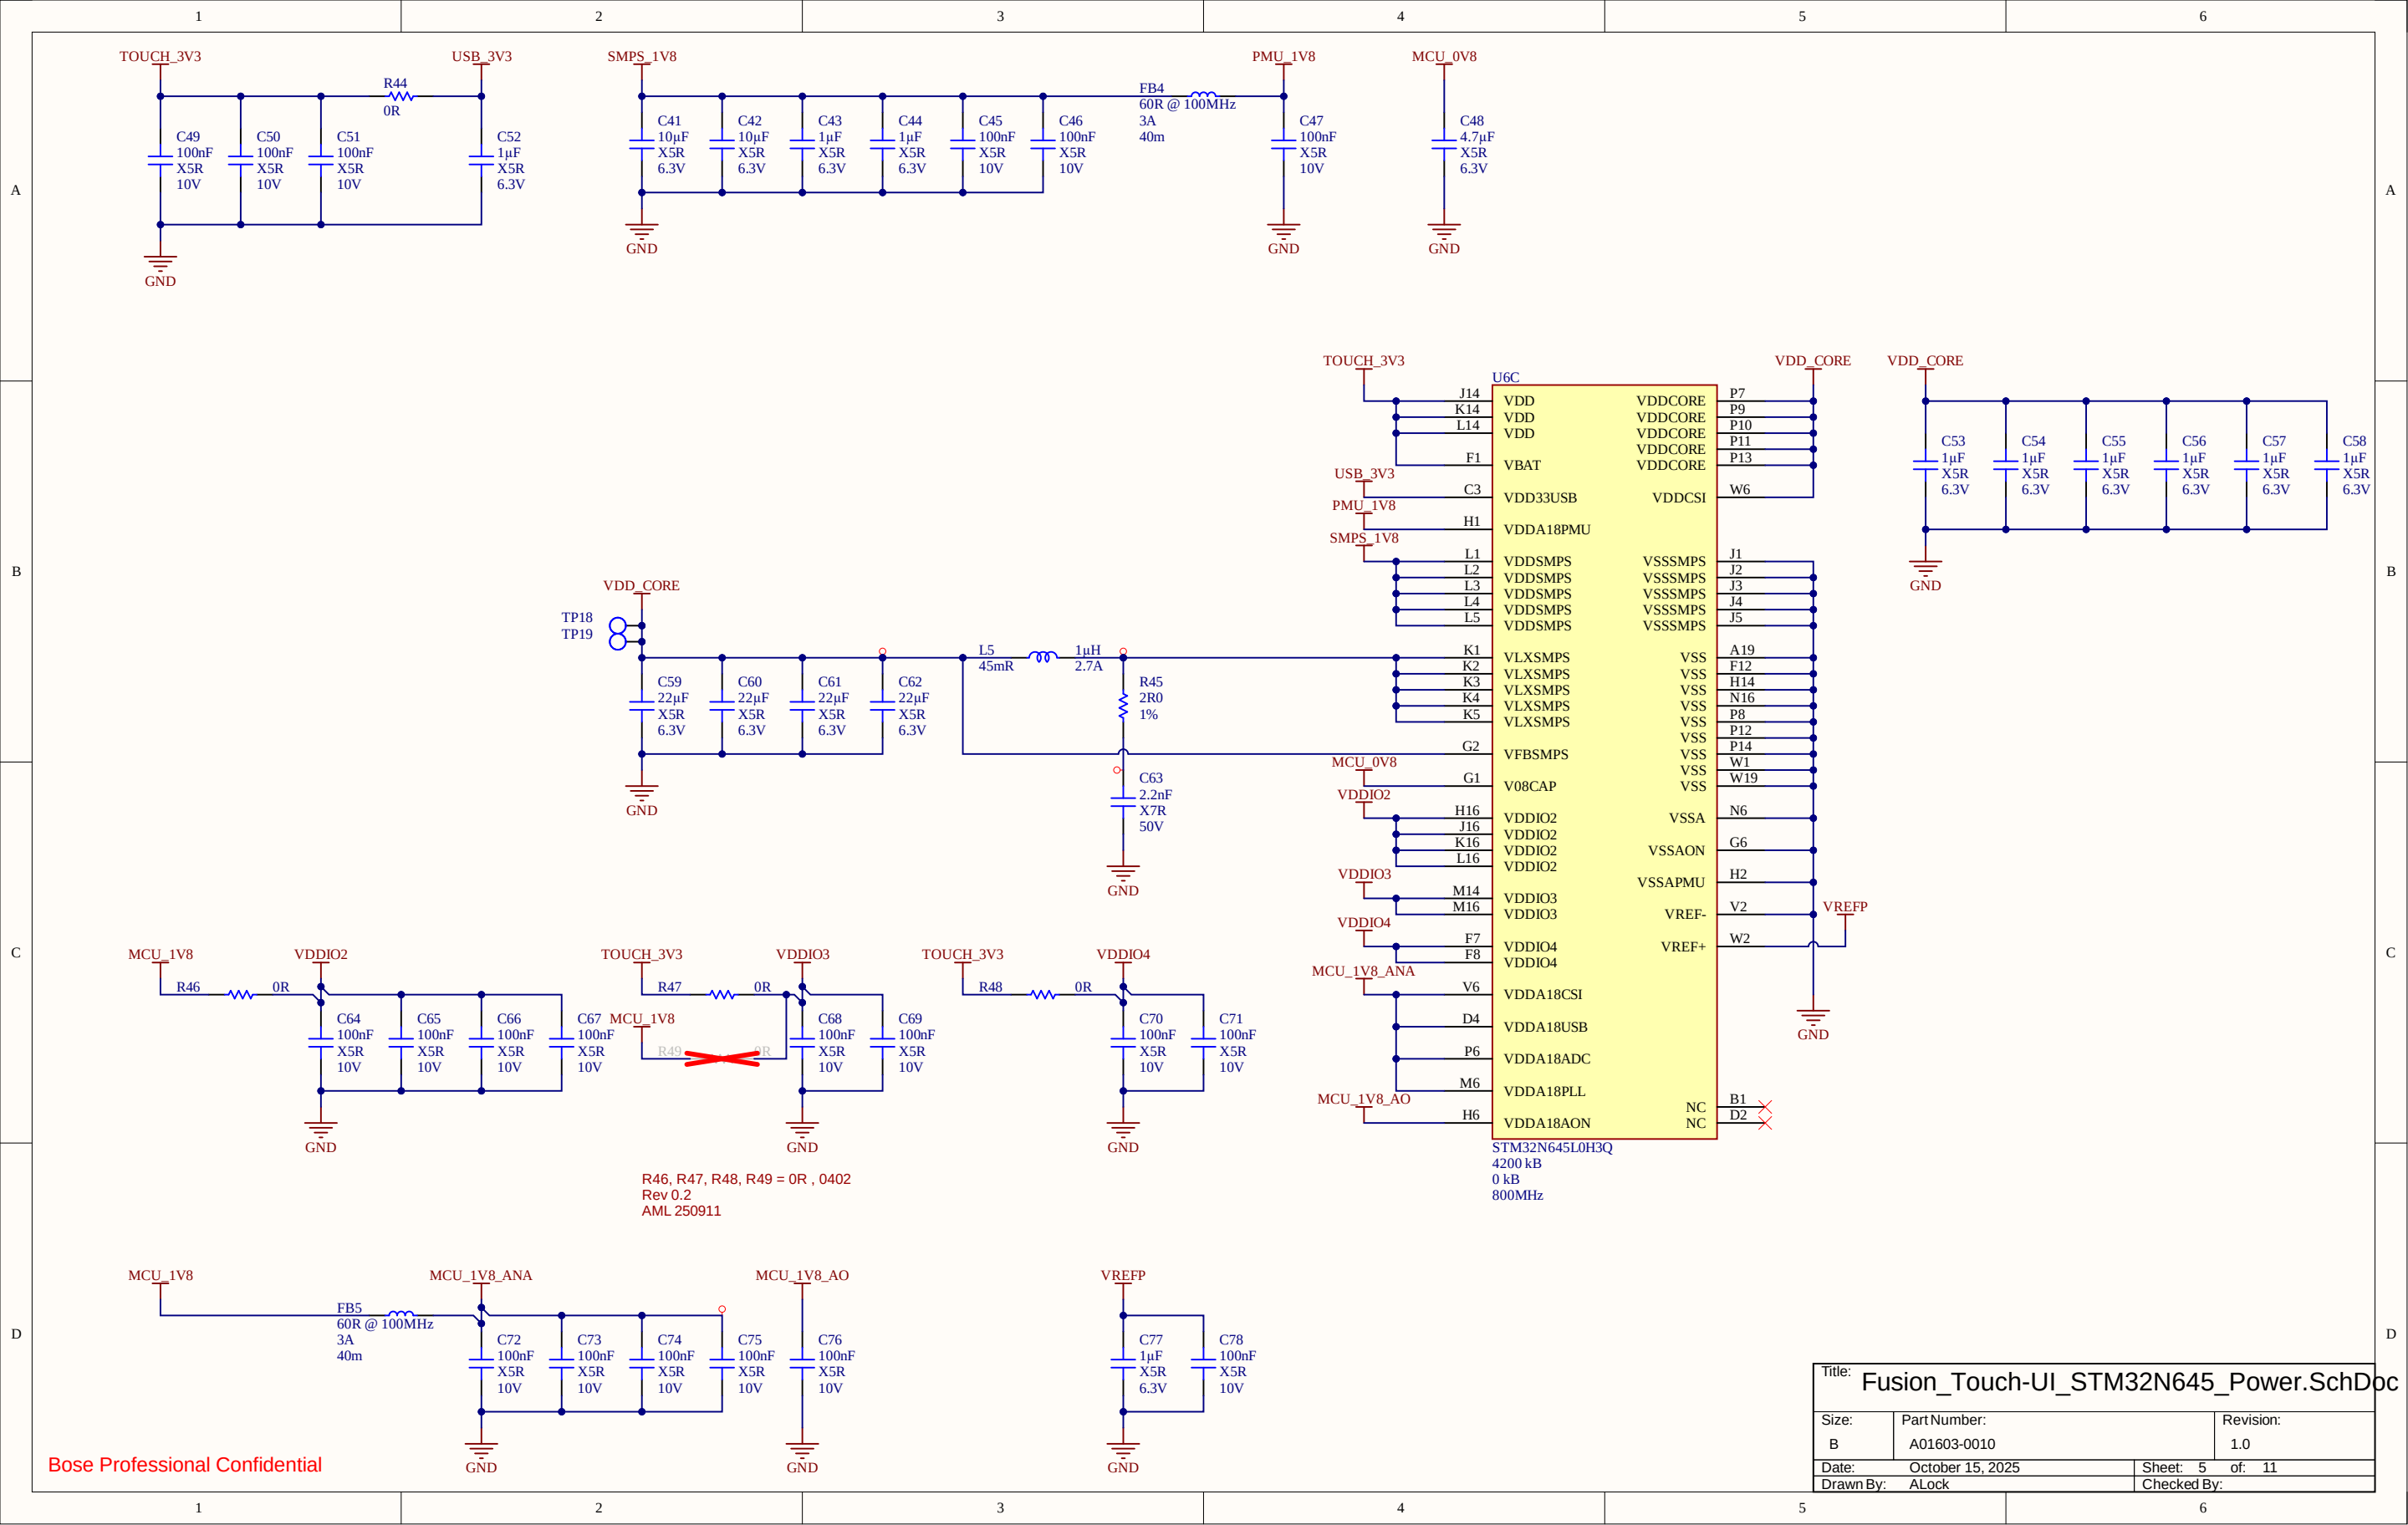

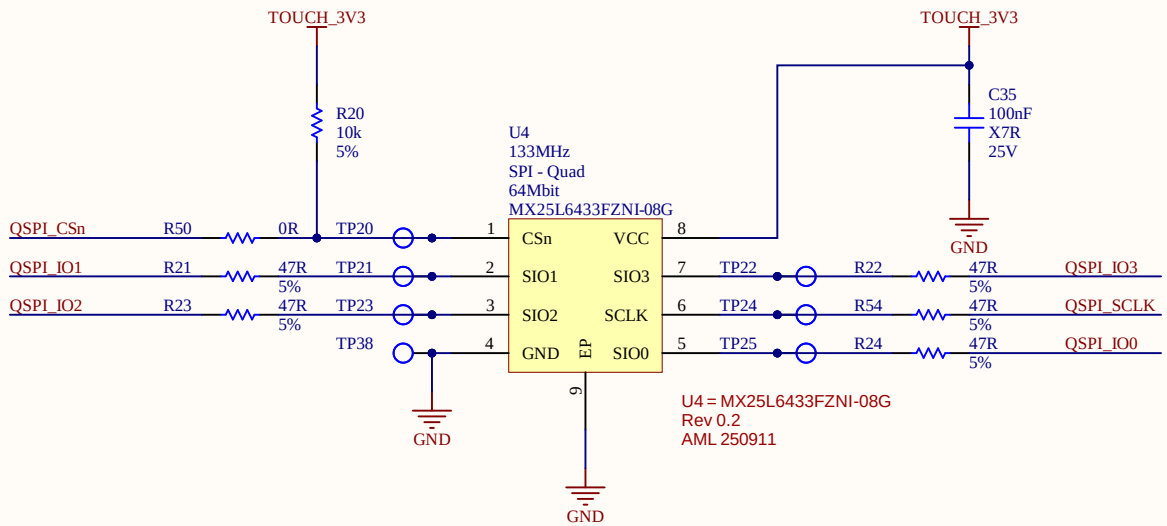

U4 = MX25L6433FZNI-08G
Rev 0.2
AML 250911



A

B

C



D

A


B

C




D

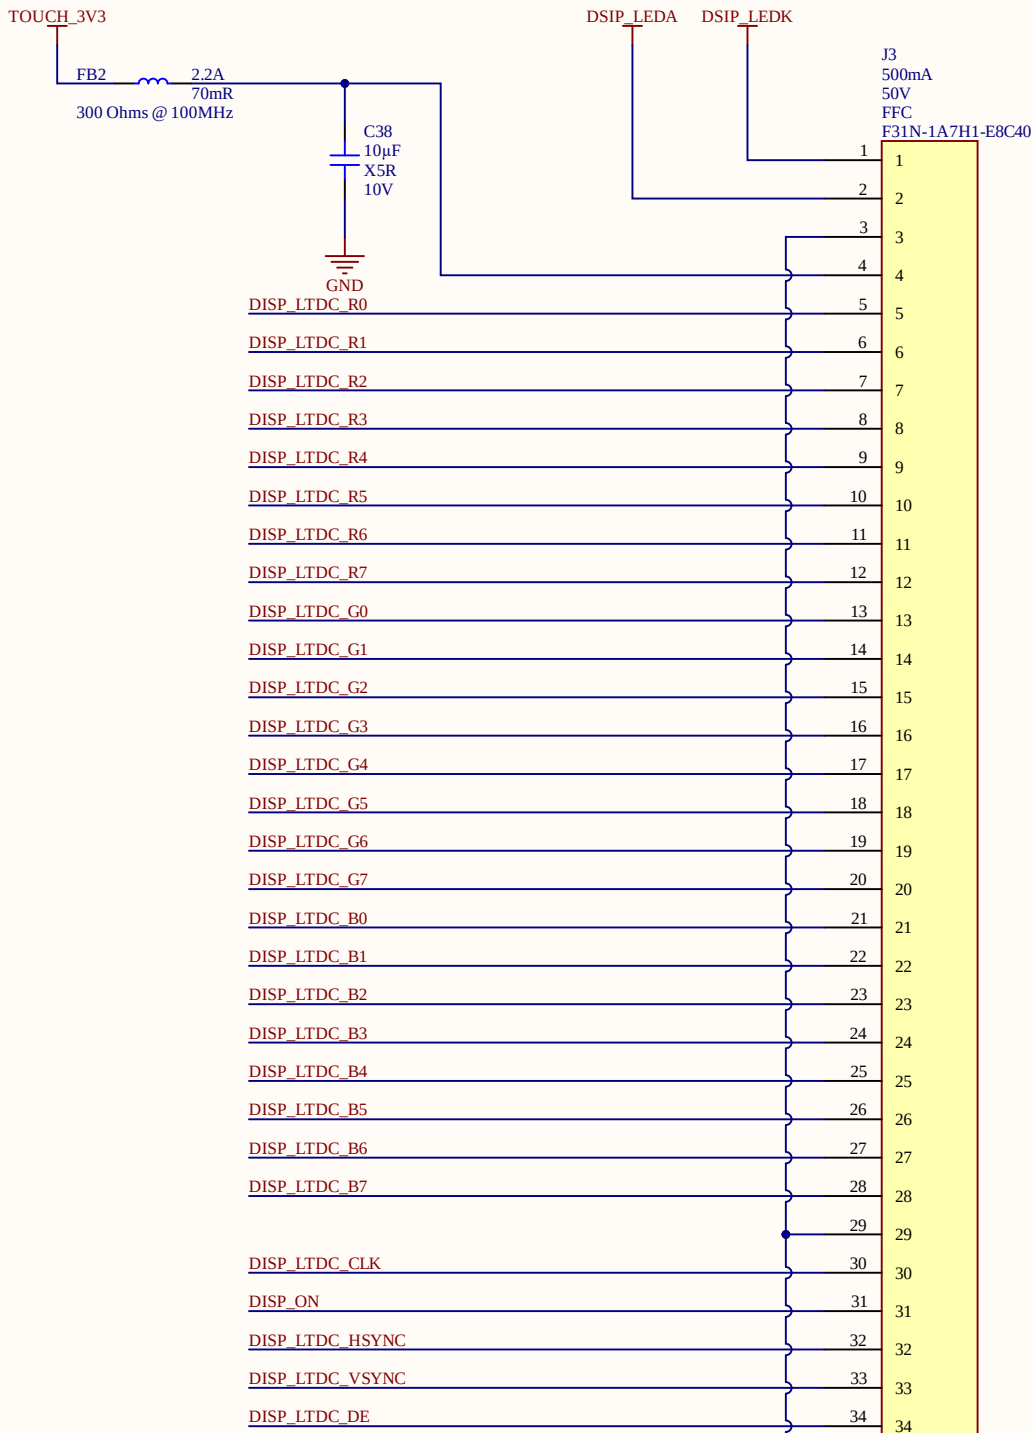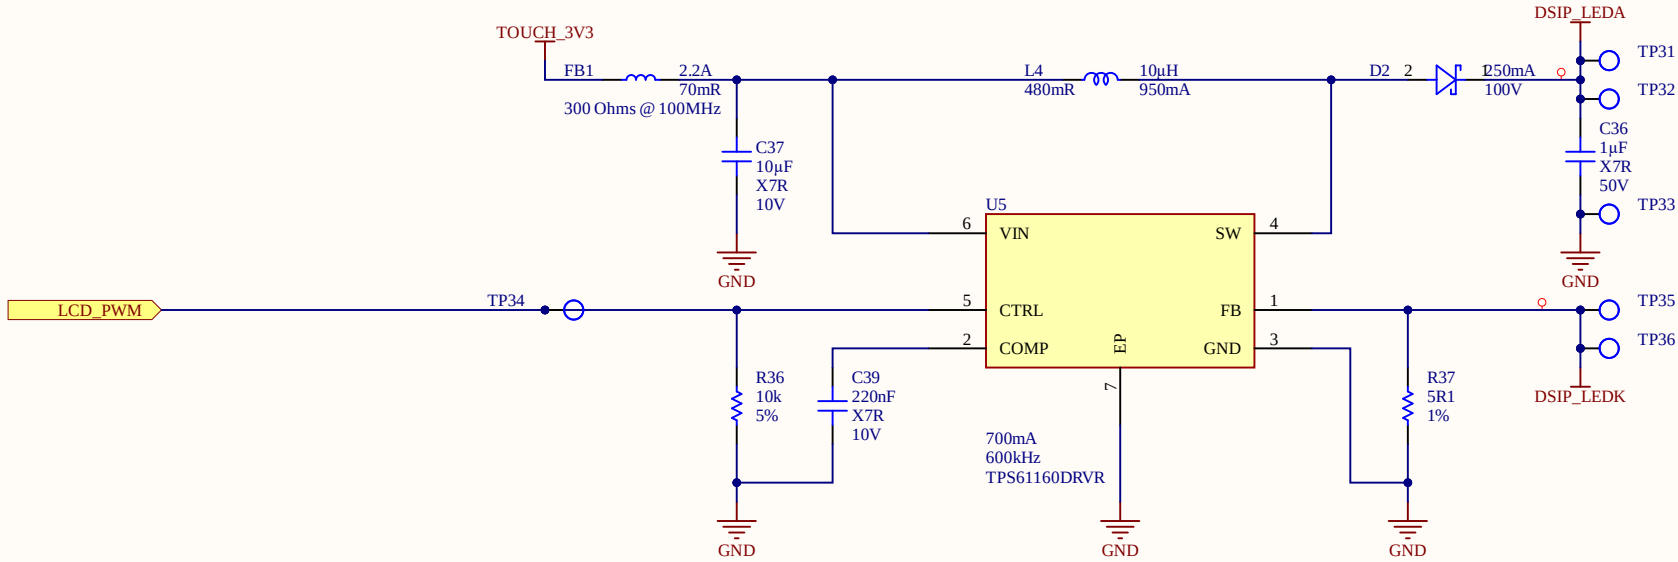

A
Pin out dependent on ME/EE design.
Pin reversal potentially required.
Pin reversal required. - AML250910

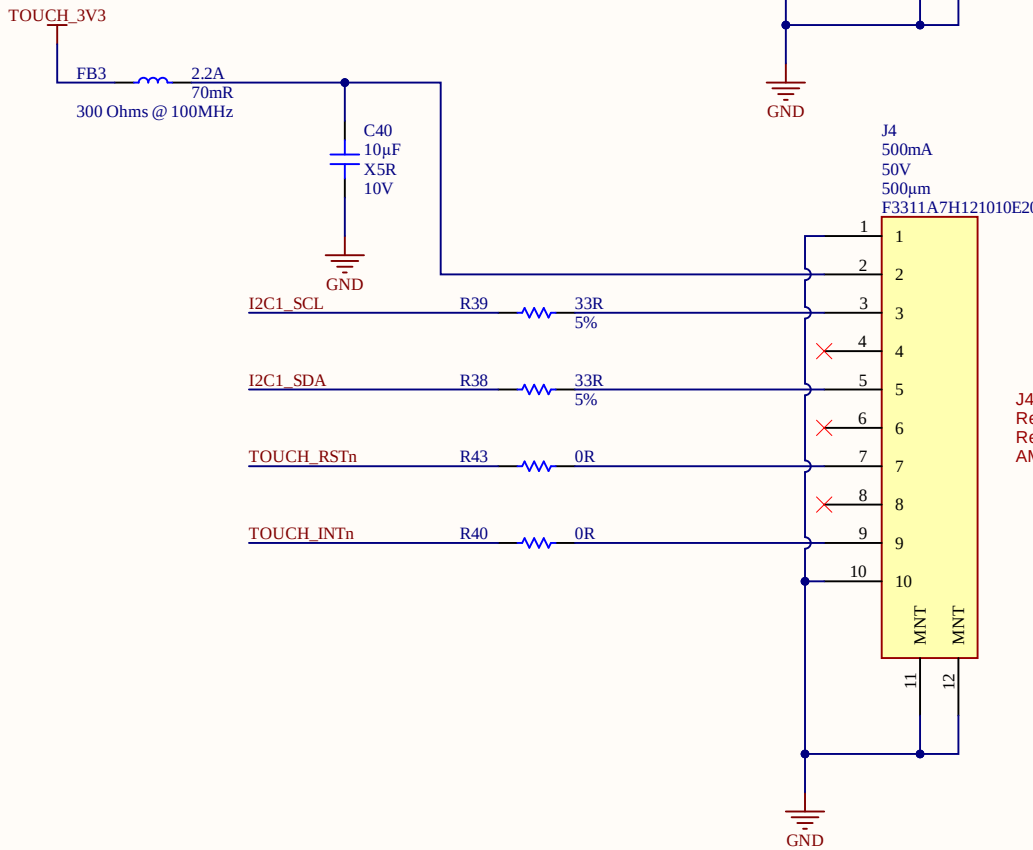

J4 = F3311A7H121010E200
Remove R41, R42
Rev 0.2
AML 250910

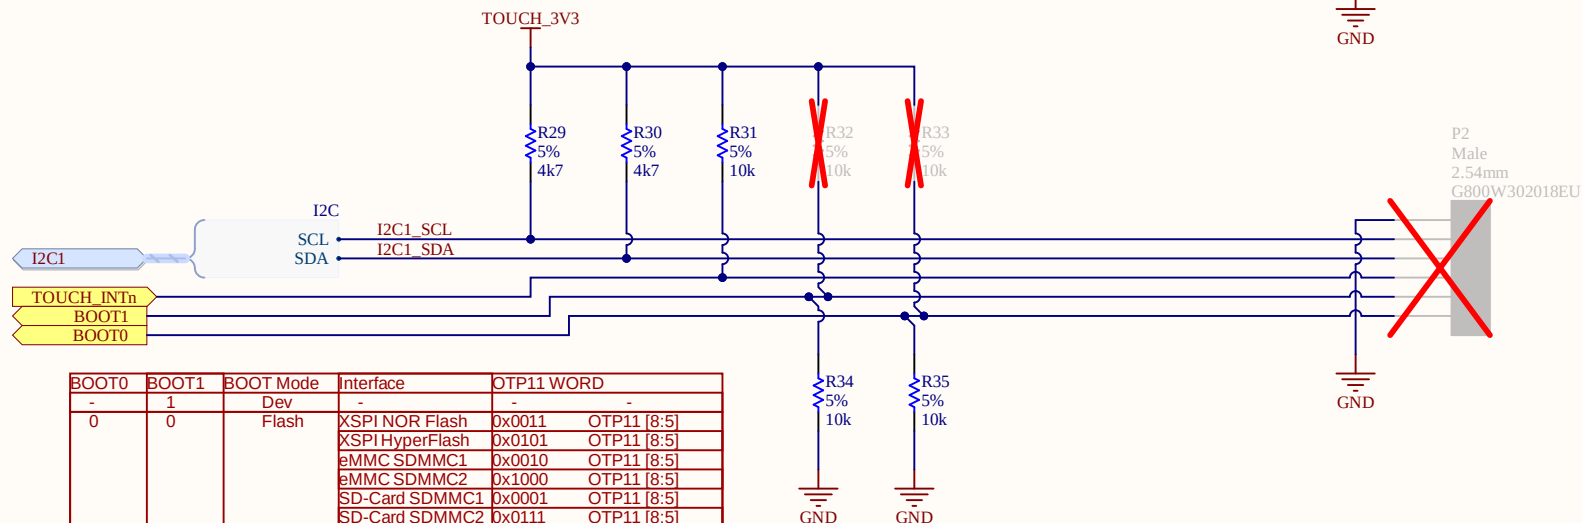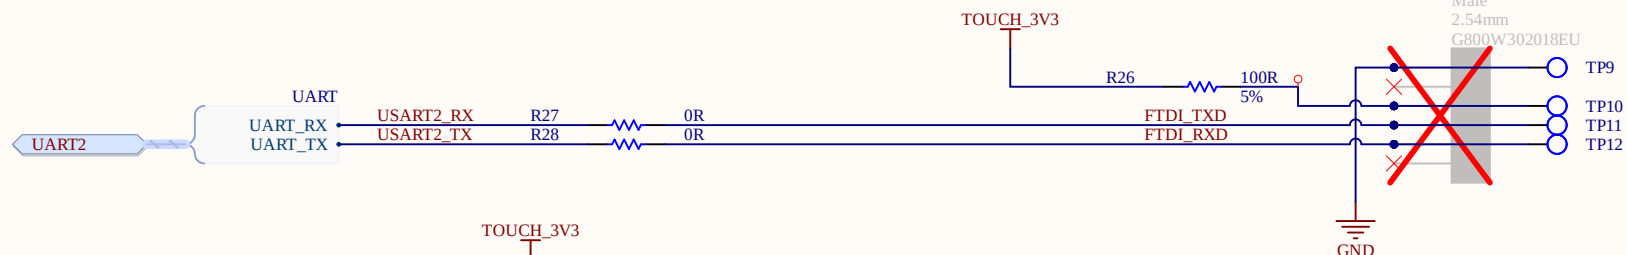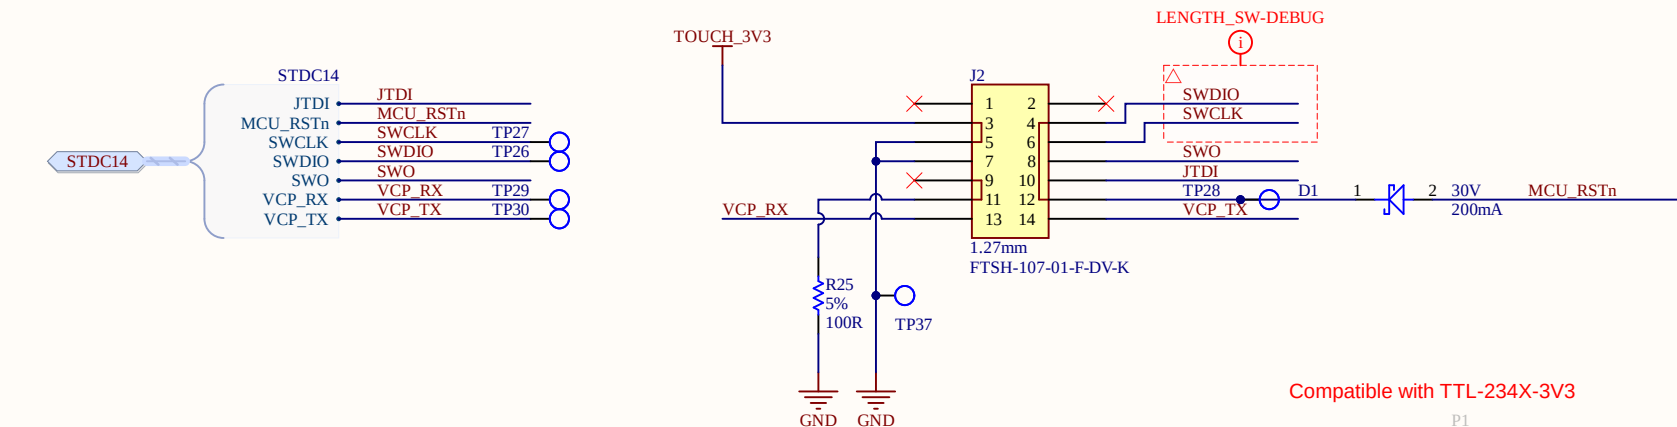

BOOT0	BOOT1	BOOT Mode	Interface	OTP11 WORD	
-	1	Dev	-	-	
0	0	Flash	XSPI NOR Flash	0x0011	OTP11 [8:5]
			XSPI HyperFlash	0x0101	OTP11 [8:5]
			eMMC SDMMC1	0x0010	OTP11 [8:5]
			eMMC SDMMC2	0x1000	OTP11 [8:5]
			SD-Card SDMMC1	0x0001	OTP11 [8:5]
			SD-Card SDMMC2	0x0111	OTP11 [8:5]
1	0	Serial	USB	OTP11 [16:9]	0x11111111X
			JART	OTP11 [16:9]	0x11111111X1
			Enable: X = 0. Disable X = 1		

Bose Professional Confidential

Title: Fusion_Touch-UI_DEBUG.SchDoc			
Size: A	Part Number: A01603-0010		Revision: 1.0
Date: October 15, 2025	Sheet: 9 of: 11		
Drawn By: A.Lock	Checked By:		

A

B

C


D

A

B

C

D

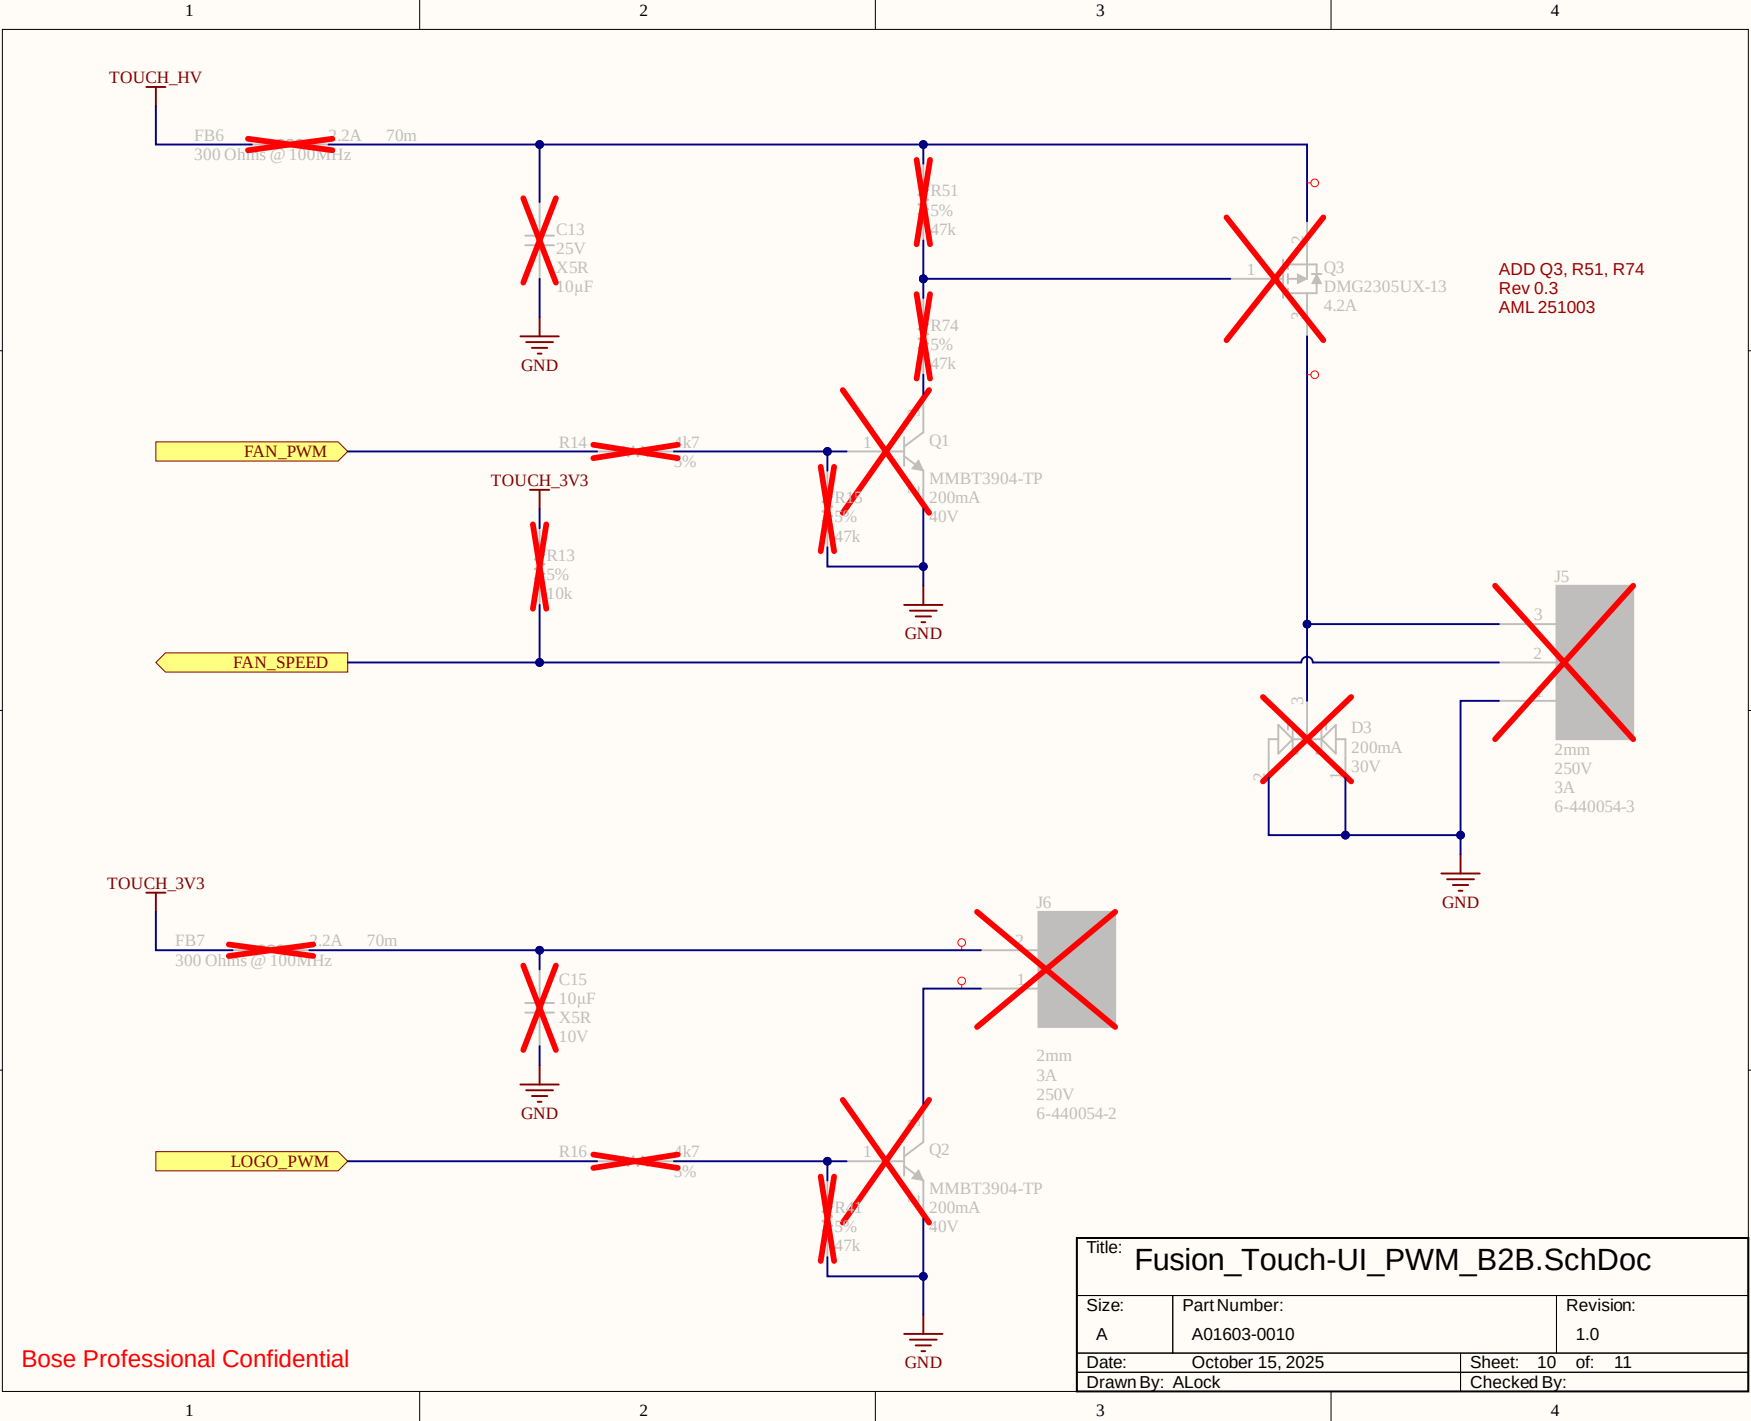

Revision History

Revision	Date	Author	Sheet	Description
Rev0.1	250829	AML	ALL	Release SCH and BOM for initial review.
Rev0.2	250910	AML	04	U1, U3 = TPS561243DRLR: Enable light load efficiency by utilizing eco-mode variant instead of FCCM Delete L2, C15, C19, C20, C21, R12, R15, C23, R11, R14, C17: Switch to LDO to reduce cost and complexity. U2 = TLV77118DQNR: Switch to LDO to reduce cost and complexity
	250911	AML	04	C18, C22 = 1uF, 0402, X5R: Switch to LDO to reduce cost and complexity Delete C12, C13, C32, C33: Move to more compact and less expensive output filter. C14, C34 = 22uF, 0603, X5R: Move to more compact and less expensive output filter. Delete R10, C16, Q1, C25, R13, R16, C26, Q2: Move from 1.8V switch to LDO for more compact and less expensive design. C24 = 1uF, 0402, X5R: Move from 1.8V switch to LDO for more compact and less expensive design.
			05	Add C12, U7: Move from 1.8V switch to LDO for more compact and less expensive design.
			07	R46, R47, R48, R49 = 0R , 0402: Reduce size due to space limitations.
	250912	AML	06	U4 = MX25L6433FZNI-08G: Move to WSON Footprint to reduce size
	250917	AML	08	Delete R51: Remove redundant resistor. J4 = F3311A7H121010E200: Update to support TDO Display
Rev0.3	250930	AML	10	Delete R41, R42: Remove support for Superview Display
			06	Add sheet 10 to support the connection of a fan and illuminated logo PCB.
			06	Add R10, R11, R12 as series components for Fan and LED connections. Release for internal review.
Rev0.3	250930	AML	08	C38, C40 = GRM188R61A106ME69D: Resolve NRND issue.
	251001	AML	04	C15 = GRM188R61A106ME69D: Resolve NRND issue. Add R42 = DNP: Add debug provision to force power on.
	251003	AML	10	Add TP44: Through hole ground test point for ease of debug. Add Q3 = DMG2305UX-13: Convert fan PWM to high side drive from low side drive. Add R51, R74 = 47k: Limit Q3 gate voltage to -6V.
Rev1.0	251009	AML	ALL	Release for C0 Prototype.
Rev1.0A.3	251013	AML	PCB PCBDWF	Update copper connection to R42 per DFM. Update impedance table to omit unused impedance profiles. Update PCB specification 11 to +/-20% only.
	251014		PCB	Add specified location for Logo and Manufacturing markings on PCB. Update L3 50Ω trace to 12.5mil.
		AML	ALL	Update BGA pad size to support 3mil trace 3.9mil space in BGA. Update Layer Stack to match manufacturer specification. Release for C0 Prototype.
Rev1.0A.4	251015	AML	PCB ALL	Update via to copper clearnce under BGA to 7mil per DFM. Release for C0 Prototype.

Title: Fusion_Touch-UI_RevisionHistory.SchDoc		
Size: A	Part Number: A01603-0010	Revision: 1.0
Date: October 15, 2025	Sheet: 11	of: 11
Drawn By: ALock		Checked By: