ADP G121EAN01.001 EC Notice

PGDAD0

2023.05.29

AUO Display+

EC Notice of Cell FAB Change to G5

* Purpose: In order to increase production capacity allocation, need to verify another cell Fab for better allocation.

* Change Items:
  - From G3.5 change to G5 FAB
  - Gate IC: from Novatek (AU65208H) to Radium (RM76870)
  - New PCBA layout to accommodate new Gate IC

* Verification schedule:

  a. RA 300hr/EMI /EMC/ optical test would be ready on the end of July.

  b. Sample would be available around by the early of June.

AUO Display+

ADP G121EAN01.000 vs. G121EAN01.001

One Page Spec

G121EAN01.001 has the comparable/ key specs as G121EAN01.000, only cell FAB change to G5.

(Preliminary) Spec.	G121EAN01.000 (Before EC)	G121EAN01.001 (After EC)
Outline Dimensions (mm)	278.0 x 184.0	←
Thickness (mm)	9.29	←
Active Area (mm)	261.12(H)x163.2(V)	←
Resolution (Pixel)	1280 RGB(H)×800(V)	←
Display Mode	AHVA	←
Contrast Ratio	800:1 (Min.)	←
Brightness	500(Typ.)	←
Response Time (typ.)	25 ms	←
Viewing Angle_ CR>10 (typ., H/ V)	89 / 89 / 89 / 89	←
LED Life Time	70K	←
Weight	480g	←
Interface	LVDS	←
Support Color	16.2M (8bit) / 262K (6bit)	←
Color Gamut (typ.)	72%	←
W(x, y) (typ.)	(0.313 , 0.329)	←
Power Consumption	6.06W	←
Power Supply Voltage (typ.)	12V	←
Operation Temp. (℃)	-30 ~ 85 ℃	←
Storage Temp. (℃)	-30 ~ 85 ℃	←
Remark	---	New PCBA due to gate IC quantity is changing from 2pcs to 1pcs after EC.

AUO Display+

ADP G121EAN01.000 vs. G121EAN01.001

Functional Block Diagram

G121EAN01.001 has the same function block diagram as G121EAN01.000

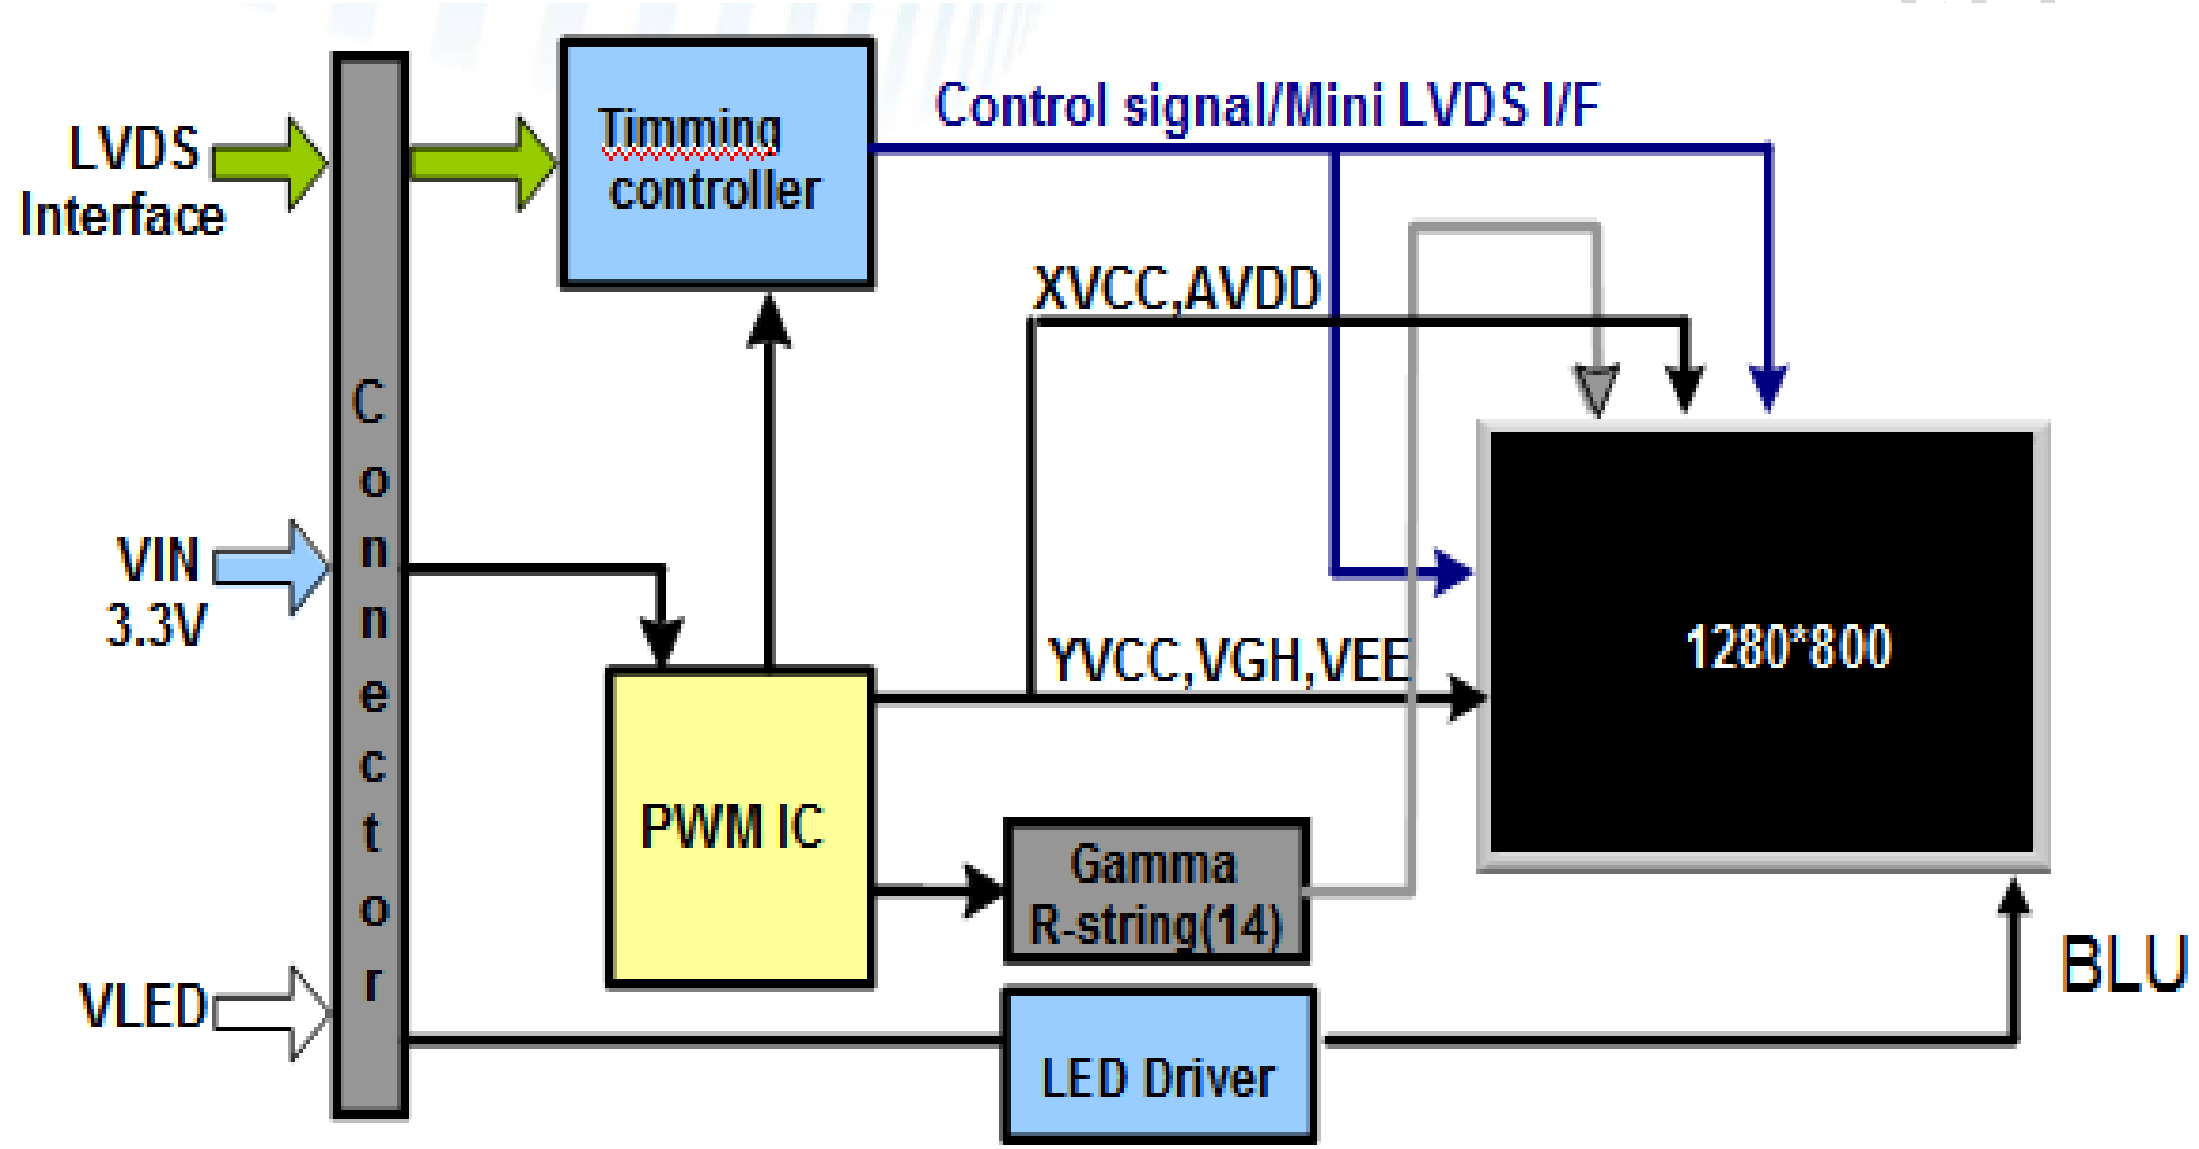

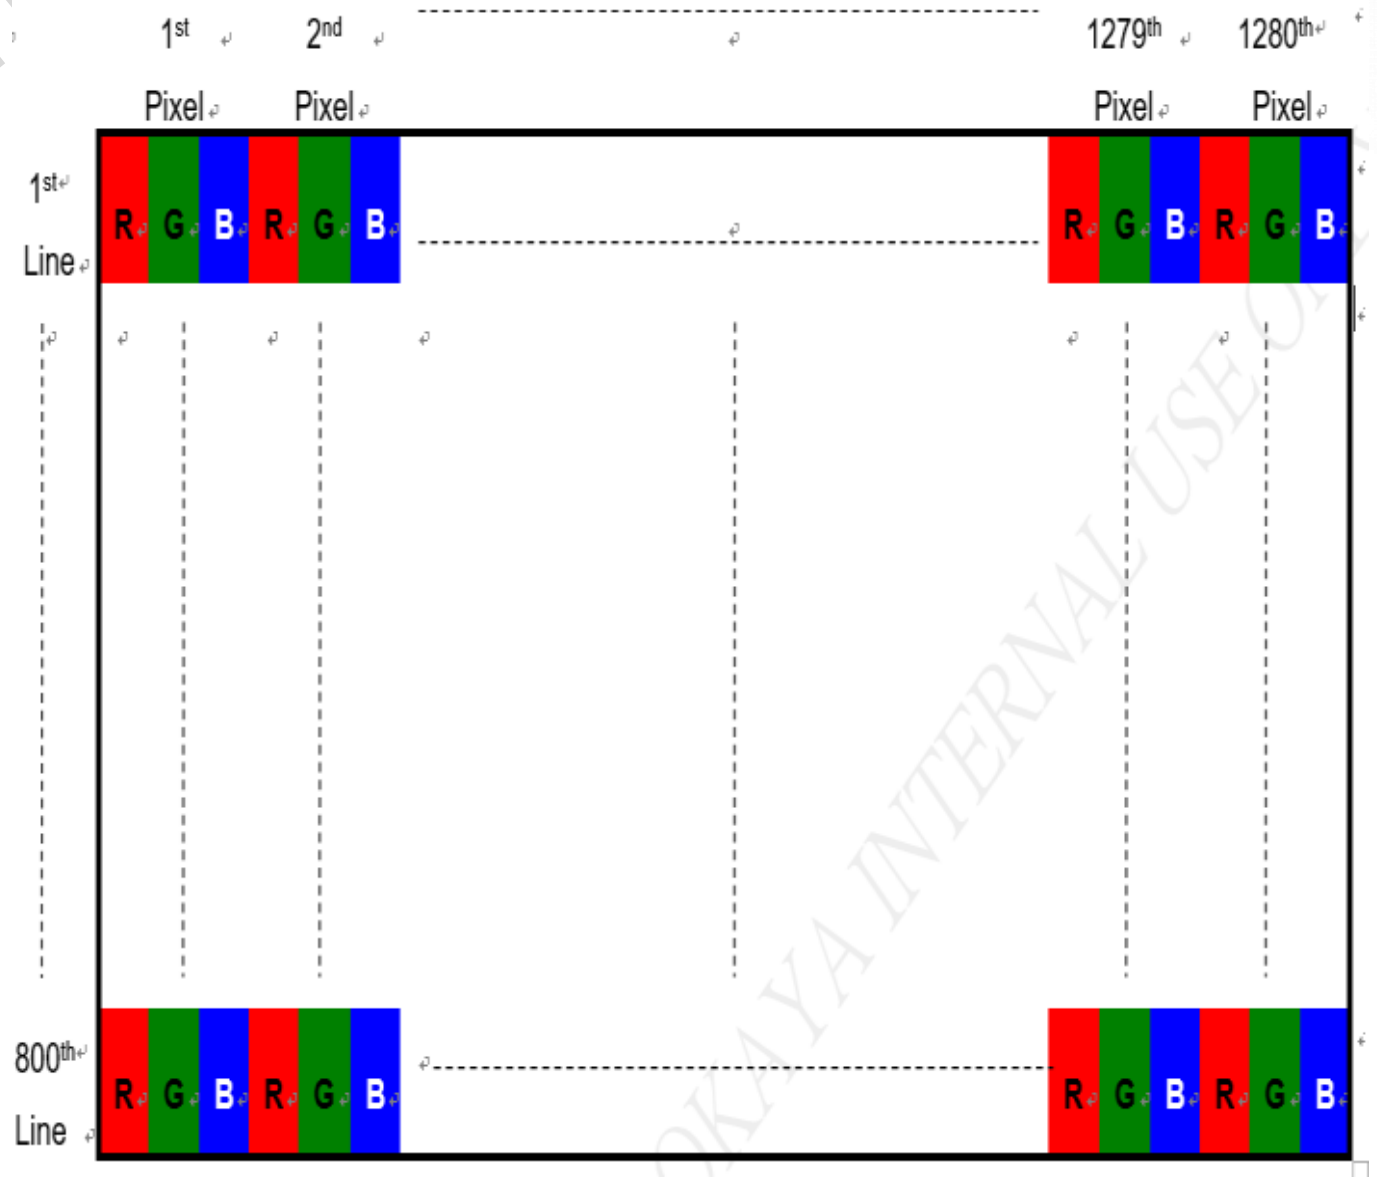

ADP G121EAN01.000 vs. G121EAN01.001

LCD Signal- Connector

G121EAN01.001 has the same LVDS Connector type/ PIN definitions as G121EAN01.000.

Connector Name / Designation	Signal Connector
Manufacturer	Starconn
Connector Model Number	093G30-B0001A-1

Pin NO	Signal Name	Description
1	VLED	LED Power Input
2	VLED	LED Power Input
3	VLED	LED Power Input
4	VLED	LED Power Input
5	EN	LED Driver Enable
6	PWM	LED Driver Backlight Adjust
7	GND	Ground
8	GND	Ground
9	VDD	Power supply:+3.3V
10	VDD	Power supply:+3.3V
11	GND	Ground
12	GND	Ground
13	RXin0N	-LVDS differential data (0N)
14	RXin0P	+LVDS differential data (0P)
15	GND	Ground
16	RXin1N	-LVDS differential data (1N)
17	RXin1P	+LVDS differential data (1P)
18	GND	Ground
19	RXin2N	-LVDS differential data (2N)
20	RXin2P	+LVDS differential data (2P)
21	GND	Ground
22	LVDS_RX_N	-LVDS differential clock input
23	LVDS_RX_P	+LVDS differential clock input
24	GND	Ground
25	RXin3N	-LVDS differential data (3N)
26	RXin3P	+LVDS differential data (3P)
27	GND	Ground
28	SEL 6/8	Low or NC-->6 bit input mode High-->8 bit input mode
29	GND	Ground
30	GND	Ground

ADP G121EAN01.000 vs. G121EAN01.001

Mechanical Front / Rear - View

G121EAN01.001 mechanical is comparable as G121EAN01.000

G121EAN01.001 has the same mounting hole design as G121EAN01.000

.

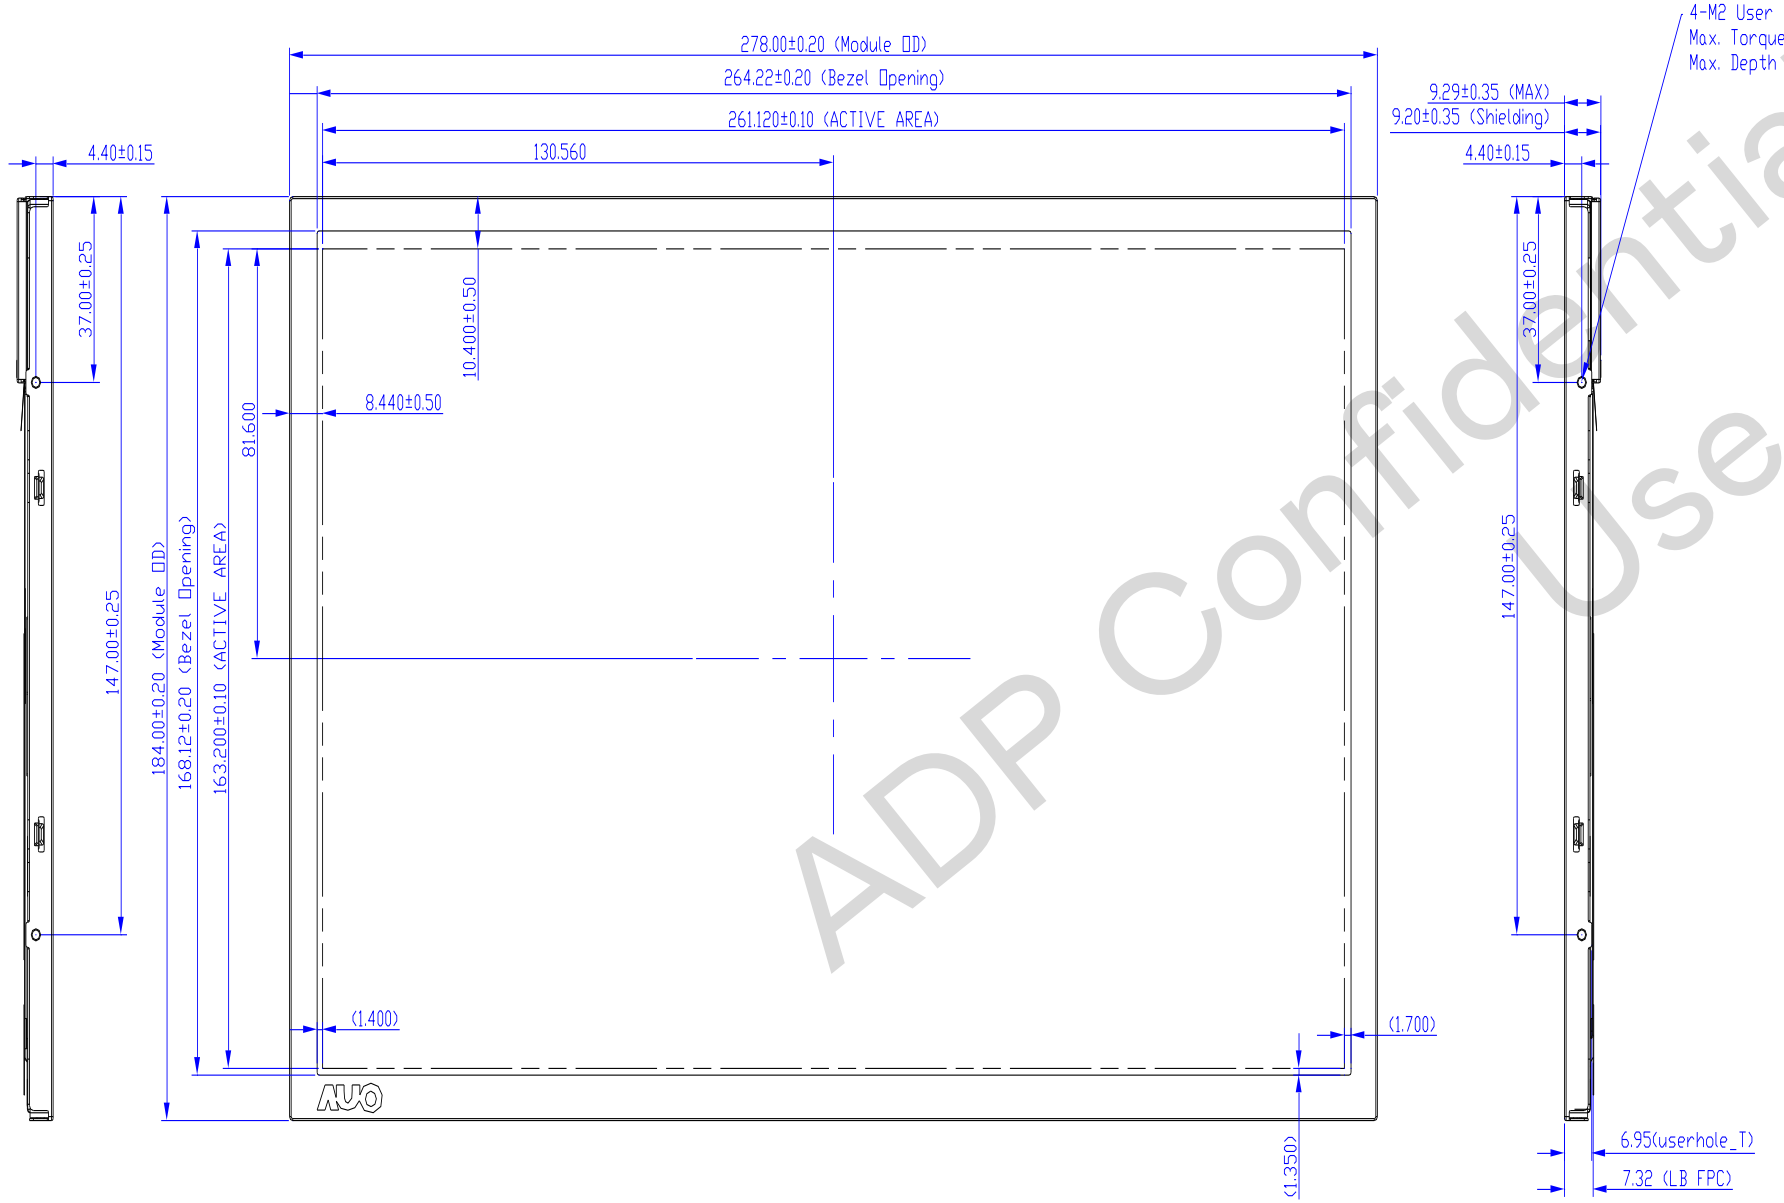

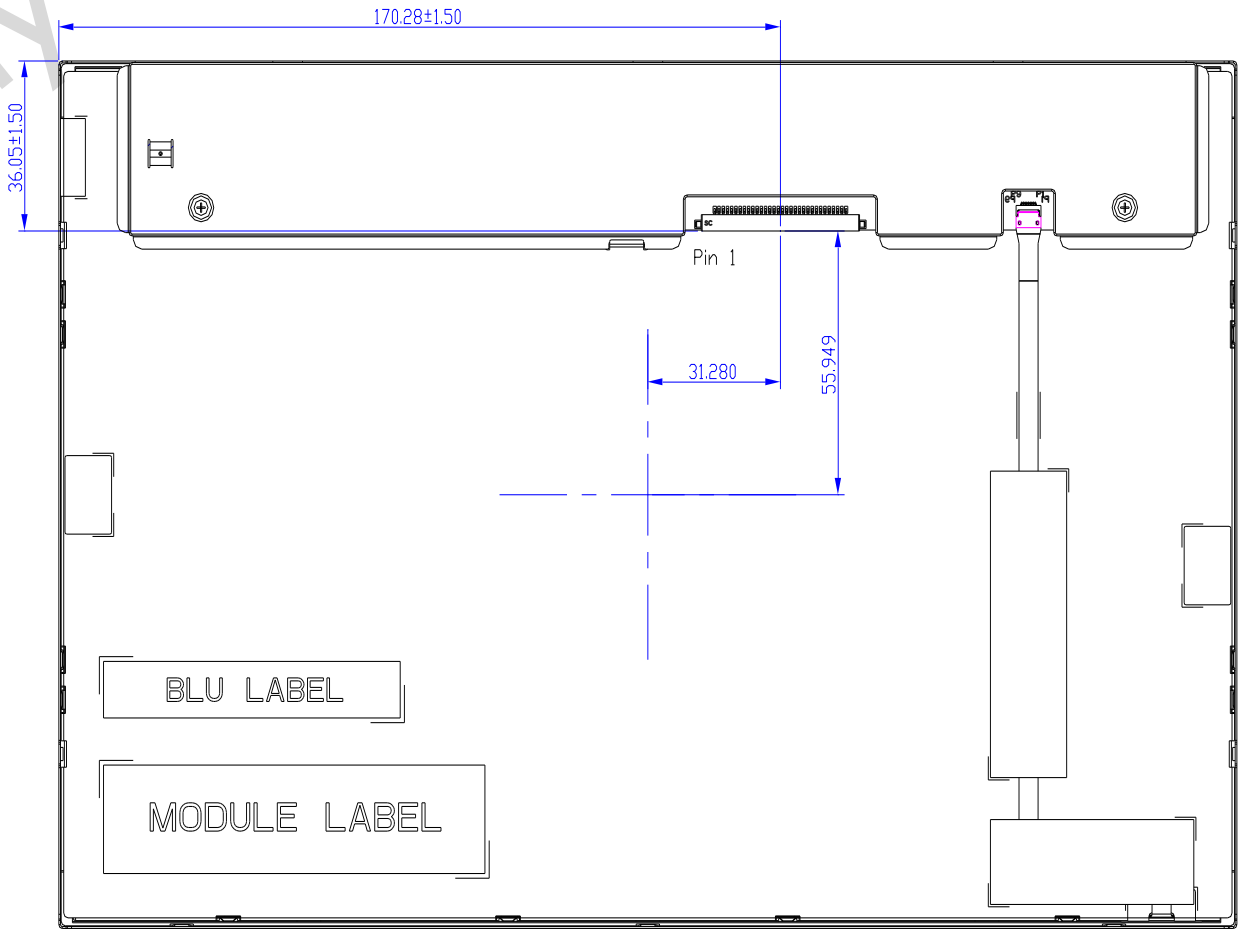

AUO Display+

Tap Into The Possibilities

AUO Display+