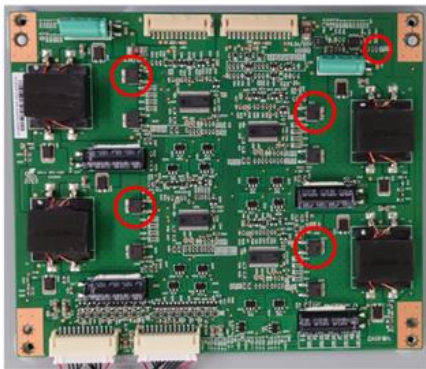
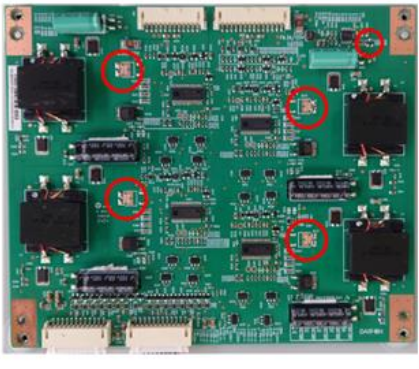
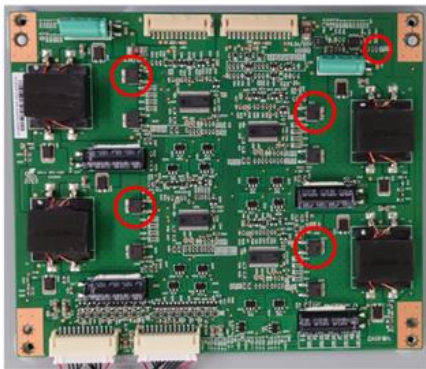
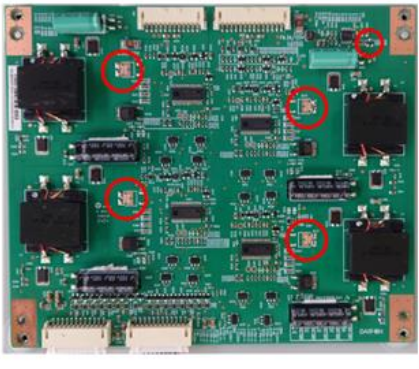
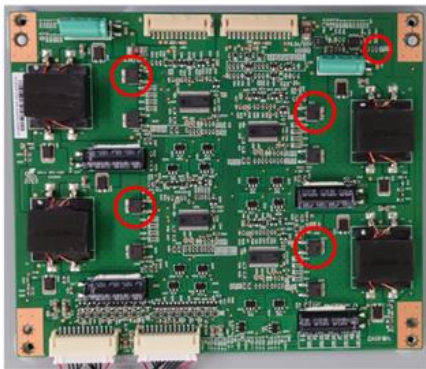
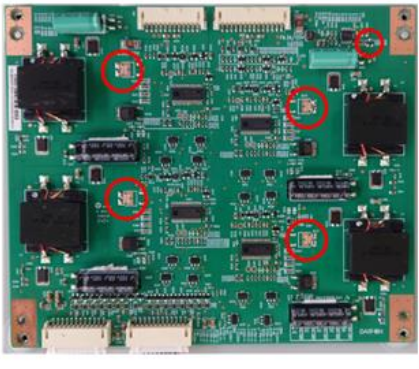


	Engineering Change Notice																									
Doc Number: PD-P430HVN05.1 Product Type: 43 Model Name: P430HVN05.1 Issued Date: 2024/06/28	Requested by <table border="1"> <tr> <td>Signature</td><td><i>Jimmy Hsu</i></td><td><i>Travis Huang</i></td></tr> <tr> <td>Date</td><td>2024/06/28</td><td>2024/06/28</td></tr> <tr> <td>Name</td><td>Jimmy Hsu</td><td>Travis Huang</td></tr> <tr> <td>Title</td><td>PM</td><td>PM Manager</td></tr> </table>		Signature	<i>Jimmy Hsu</i>	<i>Travis Huang</i>	Date	2024/06/28	2024/06/28	Name	Jimmy Hsu	Travis Huang	Title	PM	PM Manager												
Signature	<i>Jimmy Hsu</i>	<i>Travis Huang</i>																								
Date	2024/06/28	2024/06/28																								
Name	Jimmy Hsu	Travis Huang																								
Title	PM	PM Manager																								
1. Purpose P430HVN05.1 LED driver board output current reduced from 80mA to 67mA; Power consumption reduced from 134.9W to 110W																										
2. Changes LED driver board output current reduced from 80mA to 67mA																										
3. Desired Implementation Method & Date 2024/7/13; running change																										
3. Attachment																										
<table border="1"> <tr> <td colspan="2">P430HVN05.1 before EC²</td> <td colspan="2">P430HVN05.1 After EC²</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td>Model Name</td> <td>P430HVN05.1 (before EC)</td> <td>P430HVN05.1 (after EC)</td> <td></td> </tr> <tr> <td>Output Current</td> <td>80mA</td> <td>67mA</td> <td></td> </tr> <tr> <td>Output MOS</td> <td>2pcs (For Thermal) * 4_DCDC</td> <td>1pcs * 4_DCDC</td> <td></td> </tr> <tr> <td>Q106</td> <td>NA</td> <td>Add (reduce power consumption during standby mode)</td> <td></td> </tr> </table>			P430HVN05.1 before EC ²		P430HVN05.1 After EC ²						Model Name	P430HVN05.1 (before EC)	P430HVN05.1 (after EC)		Output Current	80mA	67mA		Output MOS	2pcs (For Thermal) * 4_DCDC	1pcs * 4_DCDC		Q106	NA	Add (reduce power consumption during standby mode)	
P430HVN05.1 before EC ²		P430HVN05.1 After EC ²																								
																										
Model Name	P430HVN05.1 (before EC)	P430HVN05.1 (after EC)																								
Output Current	80mA	67mA																								
Output MOS	2pcs (For Thermal) * 4_DCDC	1pcs * 4_DCDC																								
Q106	NA	Add (reduce power consumption during standby mode)																								
Customer Feedback																										
Disposition ☐ Agree ☐ Disagree, Comment: Note: Please Kindly reply to ADP within 14 calendar days upon receipt. This ECR will be regarded as "Agree" if ADP does not receive feedback with 14 calendar days.		Agreed by: <table border="1"> <tr> <td>Signature</td><td>_____</td></tr> <tr> <td>Date</td><td>_____</td></tr> <tr> <td>Name</td><td>_____</td></tr> <tr> <td>Title</td><td>_____</td></tr> </table>		Signature	_____	Date	_____	Name	_____	Title	_____															
Signature	_____																									
Date	_____																									
Name	_____																									
Title	_____																									

Comparison Table

	V100(Before EC)	V101(After EC)
DB Output Current	80mA	67mA
Power Consumption	134.9W	110W
Brightness	1500nits	1500nits