


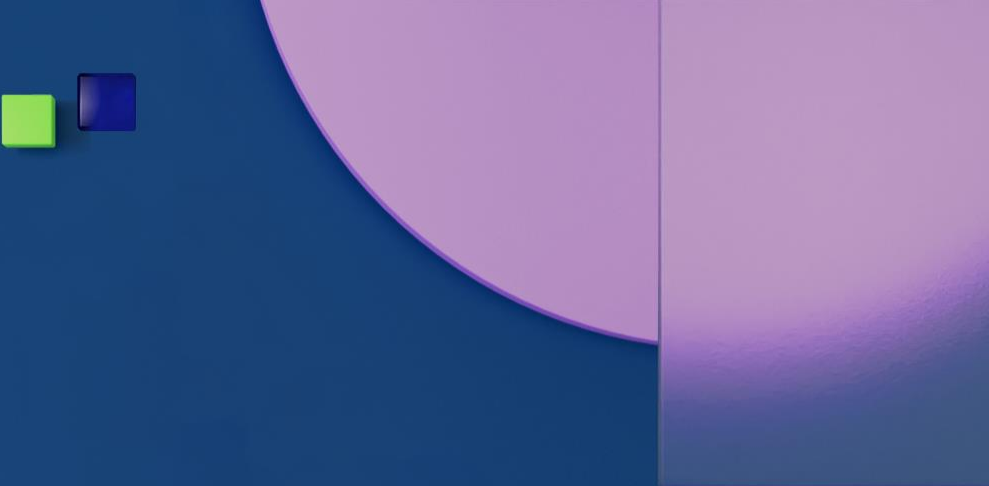

G156HAN04.0

EC Notice

2024. May. 7th

ADP Confidential _ Only for Internal Use

AUO
AUO Display+

G156HAN04.0_ EC Notice

- ❑ Purpose:
Since the current polarizer will be EOL, G156HAN04.0 will launch new polarizer.

- ❑ Changes:
Change polarizer vendor and polarizer type. This EC will not influence product spec.

Items	Before	After
Vendor	Sumika	Nitto Denko
Surface Hardness	3H	3H
Haze	25+/-5 % (inner 5%, outer 20%)	26+/-5 % (inner 20%, outer 6%)
Appearance at power-off	Sumika  Nitto Denko	

- ❑ EC Samples:
Available in [2024 Apr.](#)
- ❑ Implement Date& Method:
Running change from [2024 Jun.~Jul.](#)

G156HAN04.0_EC Notice

□ Evaluation Results: Optical

Optical Measurement Report															
Originator	chongfeng			Model/PCS		G156HAN04.0/5PCS				Date	2024/3/14				
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker														
Test System	Detector				Inverter				DC Voltage			Warm up time			
FPM-510	SR-UL2				NA				12V			30 min			
【Test Reason】															
G156HAN04.001 DVT1-1 變更 POL															
【Judgement】															
PASS															
Test Items	unit	PSS						3B7968DBZZS01	3B7968GNZZS01	3B7968ENZZS01	3B7968FPZZS01	3B7968AFZZS01	-4σ	mean	+4σ
		min	typ	max											
Center Brightness		cd/m ²	800	1000				1079.3	1127.9	1168.0	1135.7	1141.2	1001.2	1130.4	1259.6
Darkness (L0)								0.89	0.85	0.93	0.88	0.92	0.754	0.89	1.035
Contrast Ratio(CR)			700	1000				1212.7	1331.7	1250.1	1295.2	1237.5	1075.0	1265.4	1455.9
Brightness(5P Ave.)		cd/m ²						1020.6	1053.2	1067.7	1076.5	1058.8	969.9	1055.4	1140.8
Chromaticity															
	Wx	---	0.263	0.313	0.363	0.298	0.298	0.307	0.311	0.313	0.278	0.305	0.333		
	Wy	---	0.279	0.329	0.379	0.311	0.313	0.330	0.334	0.340	0.273	0.326	0.378		
	Rx	---	0.605	0.655	0.705	0.644	0.645	0.647	0.647	0.646	0.641	0.646	0.650		
	Ry	---	0.282	0.332	0.382	0.332	0.333	0.334	0.334	0.334	0.330	0.333	0.336		
	Gx	---	0.248	0.298	0.348	0.294	0.294	0.296	0.296	0.300	0.287	0.296	0.305		
	Gy	---	0.567	0.617	0.667	0.616	0.618	0.619	0.621	0.626	0.605	0.620	0.636		
	Bx	---	0.097	0.147	0.197	0.149	0.149	0.148	0.148	0.152	0.143	0.149	0.156		
	By	---	0.012	0.062	0.112	0.052	0.053	0.057	0.056	0.055	0.046	0.055	0.063		
	NTSC	---	---	72	---	75.6	75.7	75.7	76.1	76.1	74.845	75.857	76.868		

G156HAN04.0_EC Notice

□ Evaluation Results: Reliability

RA Test Summary Report

保儲單位 Storage	RA
保存年限 Retention Period:	依產品適用範圍保存 (參照: AUO@P-05-002 記憶控制流程)

Product No	G156HAN04.0	Part No	97 15048 001	Applicant/Dept	光電部RRRPF3	Judgement					
Test Purpose	G156HAN04.001 DVT1-1 變更 POL			Application Date	2024/03/11						
RA No	D240312012	Product Stage	DVT	Input Date	2024/03/12	PASS					
Test Item	Test Condition	Test Panel		Issue Date	2024/03/13	Test Result					
Hot-start	85°C 5	No	Chip_Id	Shipping_No	T0*	T1+FS*	Judgement	Judgement			
		D2403120120001		613b7968d9zzs0101	OK	OK	PASS				
		D2403120120002		613b7968d9zzs0101	OK	OK	PASS	PASS			
		D2403120120003		613b7968d9zzs0101	OK	OK	PASS				
HTO	85°C 500h	No	Chip_Id	Shipping_No	T0*	T100*	T200*	T300*	T500	Judgement	Judgement
		D2403120120001		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
		D2403120120002		613b7968d9zzs0101	OK	OK	OK	OK		PASS	PASS
		D2403120120003		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
LTO	-30°C 500h	No	Chip_Id	Shipping_No	T0*	T100*	T200*	T300*	T500	Judgement	Judgement
		D2403120120004		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
		D2403120120005		613b7968d9zzs0101	OK	OK	OK	OK		PASS	PASS
		D2403120120006		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
HTS	85°C 500h	No	Chip_Id	Shipping_No	T0*	T100*	T200*	T300*	T500	Judgement	Judgement
		D2403120120007		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
		D2403120120008		613b7968d9zzs0101	OK	OK	OK	OK		PASS	PASS
		D2403120120009		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
LTS	-30°C 500h	No	Chip_Id	Shipping_No	T0*	T100*	T200*	T300*	T500	Judgement	Judgement
		D2403120120010		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
		D2403120120011		613b7968d9zzs0101	OK	OK	OK	OK		PASS	PASS
		D2403120120012		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
THB	50°C 80% 500h	No	Chip_Id	Shipping_No	T0*	T60*	T100*	T200*	T300*	Judgement	Judgement
		D2403120120013		613b7968d9zzs0101	OK	OK	OK			PASS	
		D2403120120014		613b7968d9zzs0101	OK	OK	OK			PASS	PASS
		D2403120120015		613b7968d9zzs0101	OK	OK	OK			PASS	
TST	-20°C(30min)~60°C(30min), 100cycles Judge, 300cycles reference) 300cycles	No	Chip_Id	Shipping_No	C0*	C100*	C240	C264	C300	Judgement	Judgement
		D2403120120016		613b7968d9zzs0101	OK	OK	OK	OK		PASS	
		D2403120120017		613b7968d9zzs0101	OK	OK			OK	PASS	PASS
		D2403120120018		613b7968d9zzs0101	OK	OK			OK	PASS	

Remark

* 為 Judge Point , # Judge Point 的 Defect Alarm 請參考以下 Defect Description ,

ADP CO



Tap Into The Possibilities

ADP Confidential _ Only for Internal Use

AUO
AUO Display+