



G170ETN02.1 ECN (LVDS CNT/ POL)


AUO Display Plus Confidential For EC

- PGDBC0
- 2024/06

ECN Notice

- **Purpose:**
 - HRS CNT MDF76URW-30S-1H(55) is going to EOL, ADP will replace PTWO AL230F-A0G1D-P for the models.
 - For painless EC , physical OD , Mounting hole , I/F and General Specification wont change.
- **Changes:**
 - LVDS CNT : change from HRS CNT MDF76URW-30S-1H(55) to PTWO AL230F-A0G1D-P .
 - POL : POL with UV-328 EC to UV 328 Free POL
- **Change Items:**
 - LVDS CNT, POL

Model name	Before EC Part number	After EC part number	UV328 free Pol	HRS LVDS
G170ETN02.I	97.17G05.110	97D17G05.101	√	√

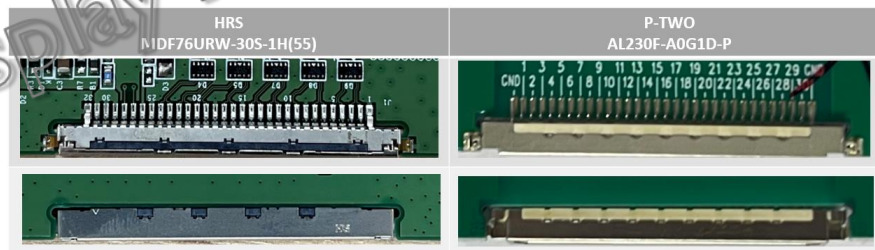

- **Schedule**
 - a. Customer Approval : 2024/12
 - d. Phase in : 2025/Q1

Optical & Image Sticking Report

Optical Measurement Report														
Originator	yongde				Model/PCS		G170ETN02.1/5PCS			Date	2024/4/1			
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk,Flicker													
Test System	Detector				Inverter		DC Voltage			Warm up time				
FPM-520-2	SR-UL1R				NA		12V			30 min				
【Test Reason】														
G170ETN02.1 RA														
【Judgement】														
PASS														
Test Items	unit	PSS					B5C2K7RKZZZS010 B5C2K7REZZZS010 B5C3C7DDZZZS010 B5C9C7CEZZZS010 B510G5HZZZS010 G600034211811P0291 G600034211811P0291 G600034211811P0291 G600034211811P0291 G600034211811P0291					-4σ	mean	+4σ
		min	typ	max										
Center Brightness	cd/m ²	640	800	962.2		954.6	956.5	979.9	978.0	918.5	966.2	1014.0		
Darkness (L0)				0.88		0.77	0.80	0.86	0.83	0.645	0.83	1.009		
Contrast Ratio(CR)		400	700	1096.6		1246.4	1196.5	1137.5	1176.2	942.4	1170.6	1398.9		
Brightness(EP Ave.)	cd/m ²			905.7		900.8	905.2	911.3	902.6	889.1	905.1	921.1		



Image sticking Test Report

保管單位

Storage

保存年限

Retention Period

RA

依產品適用範圍保存(參照：AUOP-05-002 銘錄管制流程)

RA No	D2403280010	Application/Dept	知習/RRPBF3	Test temperature	25℃
Product No	G170ETN02.1	Application Date	2024/03/20	Issue Date	2024/04/10
Test Purpose	G170ETN02.1 RA			Judgement	PASS
No	D2403280030010	D2403280030011	D2403280030012	D2403280030013	D2403280030014
Chip ID	-	-	-	-	-
S / N	g335C2k7RKZZZS0101	G335C2K7REZZZS0101	G34510G5HZZZZS0101	G335C3C7CEZZZS0101	G335C3C7DDZZZS0101
VCOM_Before(V)	-	-	-	-	-
VCOM_After(V)	-	-	-	-	-
Obv. pattern	50%Gray		50%Gray		50%Gray
觀測時間	S	L	S	L	S
T0	NA	NA	NA	NA	NA
M30	NA	NA	NA	NA	NA
T2	NA	NA	NA	NA	NA
T3	NA	NA	NA	NA	NA
T4	NA	NA	NA	NA	NA
T6	NA	NA	NA	NA	NA
T8	NA	NA	NA	NA	NA
T10	NA	NA	NA	NA	NA
T12	NA	NA	NA	NA	NA
T14	NA	NA	NA	NA	NA
T16	NA	NA	NA	NA	NA
T18	NA	NA	NA	NA	NA
T20	NA	NA	NA	NA	NA
T22	NA	NA	NA	NA	NA
T24	NA	NA	NA	NA	NA
T24+M30	NA	NA	NA	NA	NA

RA Report

Product No	G170ETN02.1			Part No	97.17G05.101			Applicant/Dept		郑习习/RRPBF3		Judgement
Test Purpose	G170ETN02.1 RA							Application Date		2024/03/20		
RA No	D240328003			Product Stage	DVT			Input Date		2024/04/01		
								Issue Date		2024/04/10		
Test Item	Test Condition	Test Panel				Test Result						
HTO	85°C 300h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	Judgement		Judgement
		D2403280030001		g335c3c7dlzzs0101		OK	OK	OK				
		D2403280030002		g335c3c7dgzzzs0101		OK	OK	OK				
		D2403280030003		g335c3c7daazzs0101		OK	OK	OK				
THB	50°C 80% 300h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	Judgement		Judgement
		D2403280030004		g34510g5gezzzs0101		OK	OK	OK				
		D2403280030005		g335c2k7whzzzs0101		OK	OK	OK				
		D2403280030006		g335c2k7wlzzzs0101		OK	OK	OK				
TST	-20°C (30min) 60°C (30min) 50cycles Judge, 100cycles reference. 100cycles	No	Chip_Id	Shipping_No		C0★	C50★	C100	Judgement	Judgement		
		D2406030290001		g335c3c7cbzzzs0101		OK	OK					
		D2406030290002		g34510g5hezzzs0101		OK	OK					
		D2406030290003		g335c3c7bkzzzs0101		OK	OK					

