




M240UAN01.0G2 ECR COF

2024/06/27

Summary

➤ Plan schedule:

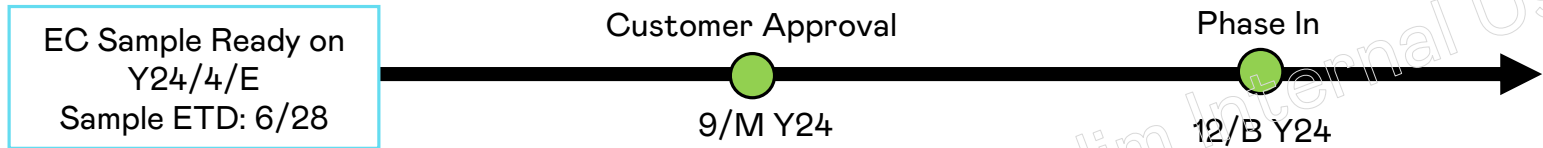

Item	EC item	As is	To be	Background and Purpose
1	COF	NT65001FH	NT61719K8H	The COF(NT65001FH) will be EOL. To keep supply smoothly, we would like to adopt new COF(NT61719K8H).

COF comparison

Before



After



- Due to source driver IC changed, the layout on the COF is different from original.



RA result: Pass

Product No	M240UAN01.0		Part No	97.24M13.0G2		Applicant/Dept		郑习习/RRPBF3		Judgement	
Test Purpose	M240UAN01.0G2 Driver IC 驗證					Application Date		2024/04/11		PASS	
						Input Date		2024/04/27			
RA No	R240424033		Product Stage	MVT		Issue Date		2024/05/17			
Test Item	Test Condition	Test Panel				Test Result					
THB	50°C 80% 300h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	Judgement	Judgement
		R2404240330001		2b4a26b9gdzzs01g2		OK	OK	OK	OK	PASS	PASS
		R2404240330002		2b4a2a45qhzzs01g2		OK	OK	OK	OK	PASS	
		R2404240330003		2b4a2a45lazzs01g2		OK	OK	OK	OK	PASS	
HTO	50°C 300h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	Judgement	Judgement
		R2404240330004		2b4a26b9kazzs01g2		OK	OK	OK	OK	PASS	PASS
		R2404240330005		2b4a2a45lmzzs01g2		OK	OK	OK	OK	PASS	
		R2404240330006		2b4a2a452bzzs01g2		OK	OK	OK	OK	PASS	
LTO	0°C 300h	No	Chip_Id	Shipping_No		T0★	T100★	T200★	T300★	Judgement	Judgement
		R2404240330007		2b4a2a45qazzs01g2		OK	OK	OK	OK	PASS	PASS
		R2404240330008		2b4a26b9ljzzs01g2		OK	OK	OK	OK	PASS	
		R2404240330009		2b4a26b9hkzzs01g2		OK	OK	OK	OK	PASS	
TST	-20°C(30min) ~ 60°C(30min), 100cycles judge, 200cycles reference. 200cycles	No	Chip_Id	Shipping_No		C0★	C100★	C200★		Judgement	Judgement
		R2404240330010		2b4a26b9kfzzs01g2		OK	OK	OK		PASS	PASS
		R2404240330011		2b4a26b9gkzzs01g2		OK	OK	OK		PASS	
		R2404240330012		2b4a26b9gmzzs01g2		OK	OK	OK		PASS	

Optical measurement result: Pass

Optical Measurement Report												
Originator	chun li			Model/PCS		M240UAN01.0/5PCS			Date	2024/4/28		
Test Condition	Lum.,CR,Chromaticity,Uniformity,Gary Scale,V-T,View Angle,RT,CrossTalk											
Test System	Detector		Inverter		DC Voltage					Warm up time		
FPM-520-2	SR-UL1R		NA		12V					30 min		
【 Test Reason 】												
M240UAN01.0G2 Driver IC 驗證												
【 Judgement 】												
PASS												
Test Items	unit	PSS			A2A45LKZZS01	A26B9HAZZS01	A26B9JCZZS01	A26B9LMZZS01	A2A45LFZZS01	-4σ	mean	+4σ
					I1300144A000M02	I1300144A000M02	I1300144A000M02	I1300144B000M02	I1300144A000M02			
		min	typ	max								
Center Brightness	cd/m ²	240	300		323.5	329.9	332.4	310.2	335.1	286.4	326.2	366.1
Darkness (L0)					0.26	0.25	0.26	0.23	0.25	0.208	0.25	0.294
Contrast Ratio(CR)		600	1000		1237.1	1326.9	1297.0	1328.5	1319.8	1148.6	1301.8	1455.0
Brightness(5P Ave.)	cd/m ²				305.0	319.7	319.6	298.7	322.6	270.7	313.1	355.5
Chromaticity												
Wx	---	0.283	0.313	0.343	0.317	0.314	0.318	0.318	0.317	0.311	0.317	0.323
Wy	---	0.299	0.329	0.359	0.342	0.340	0.343	0.343	0.343	0.337	0.342	0.348
Rx	---	0.629	0.659	0.689	0.658	0.658	0.659	0.659	0.659	0.657	0.659	0.660
Ry	---	0.302	0.332	0.362	0.334	0.334	0.334	0.334	0.334	0.333	0.334	0.335
Gx	---	0.275	0.305	0.335	0.307	0.305	0.306	0.305	0.308	0.301	0.306	0.311
Gy	---	0.596	0.626	0.656	0.626	0.628	0.627	0.628	0.625	0.621	0.627	0.633
Bx	---	0.118	0.148	0.178	0.147	0.147	0.147	0.147	0.147	0.147	0.147	0.148
By	---	0.023	0.053	0.083	0.058	0.057	0.058	0.058	0.058	0.056	0.058	0.060
NTSC	---	---	72		77.8	78.5	78.3	78.4	77.6	76.501	78.113	79.726
CCT	---	---	---		6232	6362	6162	6179	6214	5913.5	6229.8	6546.2


EMI result : Pass

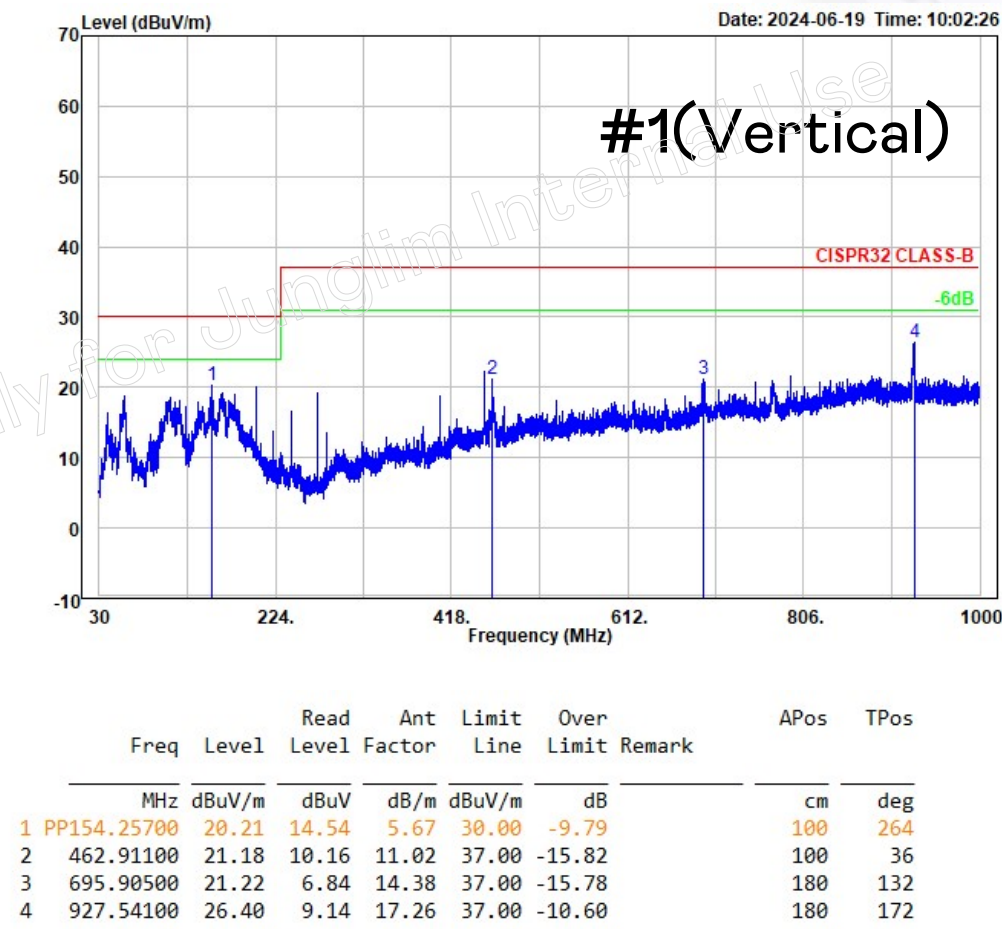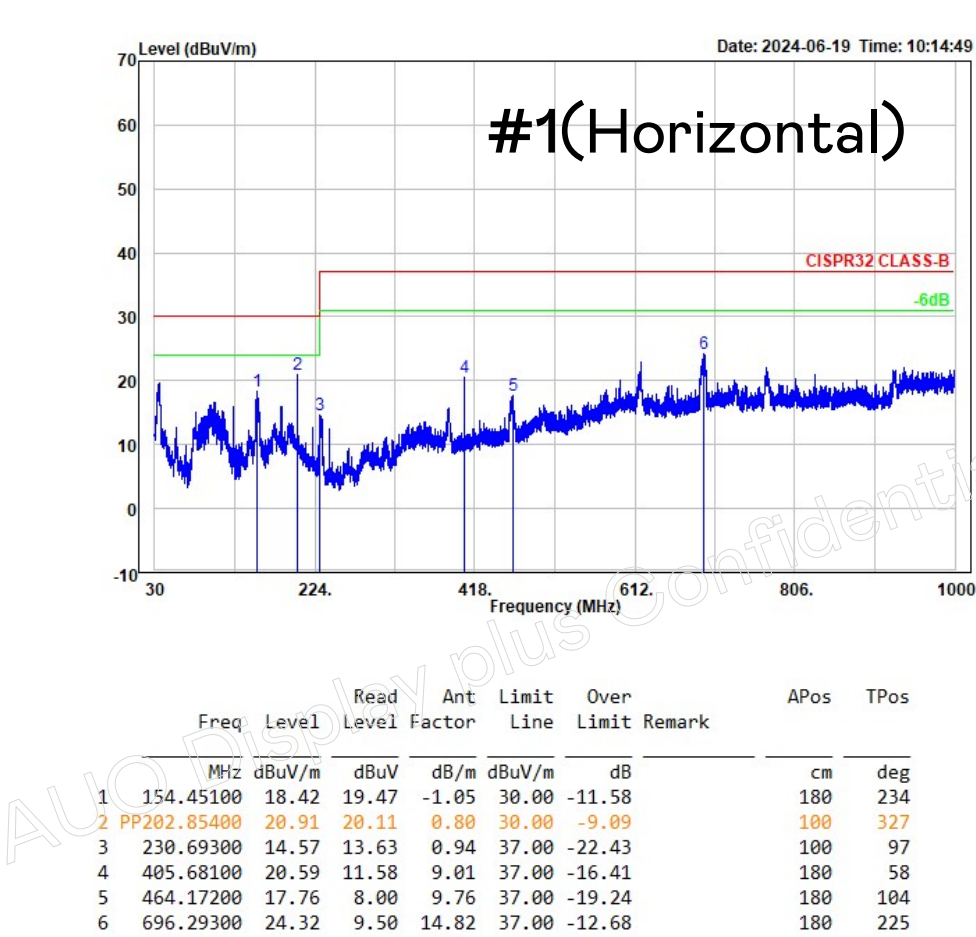

ESD result

Voltage	Sample1	Sample2	Sample3
	2B4A26B9GBZZ-ZS01G2	2B4A2A452CZZ-ZS01G2	2B4A2A452KZZ-ZS01G2
+ 8 KV	B	B	B
- 8 KV	B	B	B

File Name	20240621-5D2460023-M240UAN01.0			Test Ambient:	23 °C / 52% RH										
Application Sec.	RRCAB4	User	黃泓儒	Ext.	86-503004	Sample Received	2024/6/24								
Model Name	M240UAN01.0	Quantity (pcs)	3	Panel S/N	2B4A26B9GBZZ-ZS01G2	#1)									
					2B4A2A452CZZ-ZS01G2	#2)									
					2B4A2A452KZZ-ZS01G2	#3)									
Examiner	王溪源	Ext.	504202	Date Tested	2024/6/25	Date Completed	2024/6/25								
Test standard	☒ AUO Fixed Point Position Rules ☐ AUO IC Nearly Point Position Rules ☐ Customer Rules														
Stage	TEST		Resolution	Frame rate (Hz)	Color depth (bit)	Pixel clock (MHz)	Level B								
			1920 X 1200												
XPCB Part №		Layout №		PCB Vendor	N/A										
YPCB Part №		Layout №		PCBA Vendor	N/A										
C/B Part №		Layout №		ASIC											
Inverter Part №	NA	Inverter Vendor	NA	SOURCE IC											
				GATE IC											
Purposes	其他, DVT驗證														
Test Specification: Test Level Requirement: B					Results PASS										
Test Standard: AUO Fixed Point Position Rules (8 points, 25 times/point)															
Acceptance Definition:															
<table><tr><td>Class A</td><td>Normal operation. No degradation. No failures.</td></tr><tr><td>Class B</td><td>Some performance degradation allowed.</td></tr><tr><td>Class C</td><td>Temporary performance degradation. Recovery by operator (Reset) is acceptable. No Hardware failures.</td></tr><tr><td>Class D</td><td>Permanent damage.</td></tr></table>								Class A	Normal operation. No degradation. No failures.	Class B	Some performance degradation allowed.	Class C	Temporary performance degradation. Recovery by operator (Reset) is acceptable. No Hardware failures.	Class D	Permanent damage.
Class A	Normal operation. No degradation. No failures.														
Class B	Some performance degradation allowed.														
Class C	Temporary performance degradation. Recovery by operator (Reset) is acceptable. No Hardware failures.														
Class D	Permanent damage.														

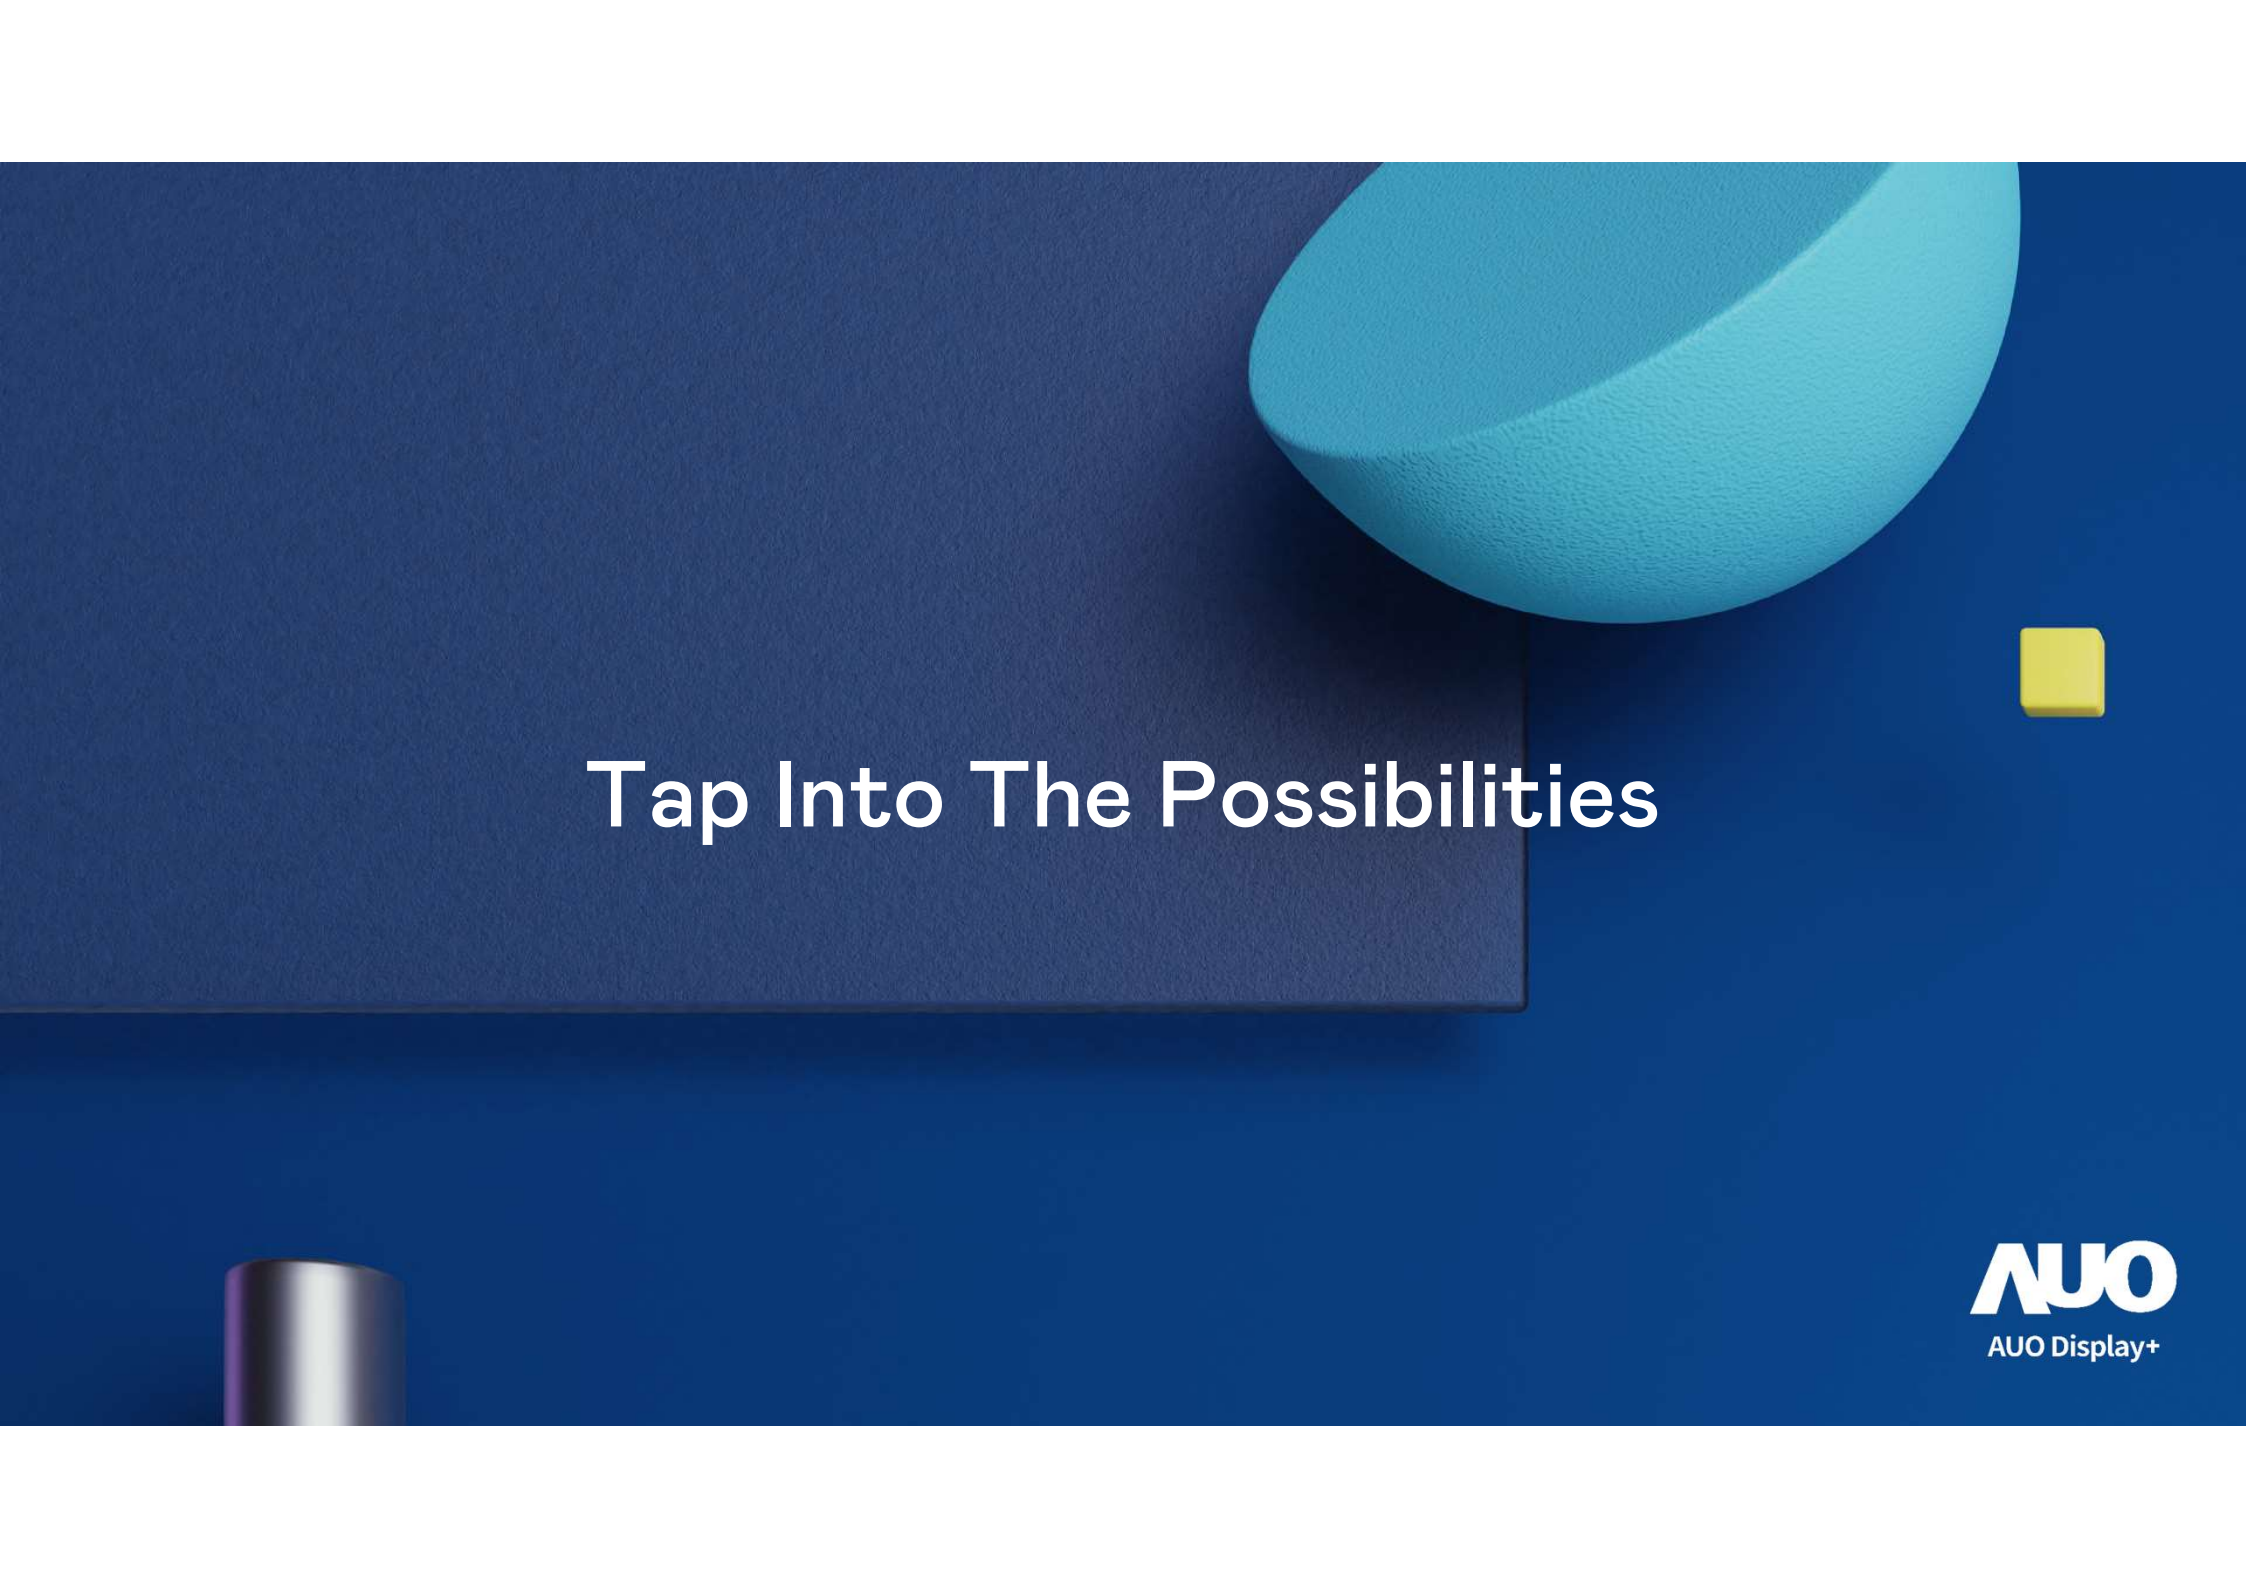

Tap Into The Possibilities

AUO
AUO Display+