

A blue triangle graphic is located on the left side of the slide, pointing to the right. It is a solid blue color and is positioned to the left of the main title text.

# G101EVT05.1 ECN for New TP Proposal

GD Business  
2024.10

## EC Notice

### \* Purpose:

Due to product capacity allocation and strategy consideration, G101EVT05.1 will launch a new touch panel for better allocation.

### \* Change Items:

- New TP Sensor

# GI01EVT05.1 SPEC Table





## One Page Spec

| Spec.                             | GI01EVT05.100 (Before EC)  | GI01EVT05.102 (After EC) |
|-----------------------------------|----------------------------|--------------------------|
| LCM Outline Dimensions (mm)       | 257.45 (H) x 175.5 (V)     | ←                        |
| CG Thickness (mm)                 | 1.1                        | ←                        |
| Sensor Type                       | OGS                        | Film sensor              |
| Touch points                      | 2 ponits                   | Multi points             |
| Total Thickness (mm)              | 10.14 (PCBA side)          | ←                        |
| Active Area (mm)                  | 216.96(H) x 135.6(V)       | ←                        |
| Resolution (Pixel)                | 1280 x 800                 | ←                        |
| Display Mode                      | AMVA                       | ←                        |
| Contrast Ratio                    | 1300:1                     | ←                        |
| Brightness                        | 500(Typ.)                  | ←                        |
| Response Time (typ.)              | 25ms                       | ←                        |
| Viewing Angle_ CR>10 (typ., H/ V) | 85 / 85 / 85 / 85          | ←                        |
| LED Life Time (min.)              | 50K                        | ←                        |
| Weight                            | 350g                       | ←                        |
| Interface                         | LVDS                       | ←                        |
| Support Color                     | 16.2M (8bit) / 262K (6bit) | ←                        |
| Color Gamut (typ.)                | 45%                        | ←                        |
| W(x, y) (typ.)                    | (0.313 , 0.329)            | ←                        |
| Power Consumption                 | 6.65W                      | ←                        |
| Power Supply Voltage (typ.)       | 12V                        | ←                        |
| Operation Temp. (°C)              | -20 ~ 70 °C                | ←                        |
| Storage Temp. (°C)                | -30 ~ 80 °C                | ←                        |
| Note                              |                            | New FW                   |

AUO Display+

# GI01EVT05.102 Drawing

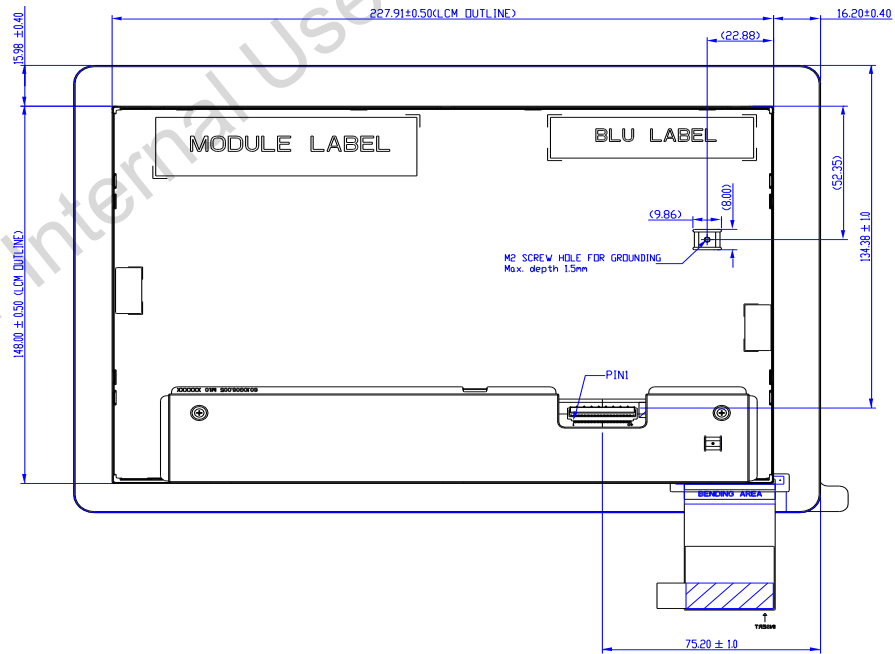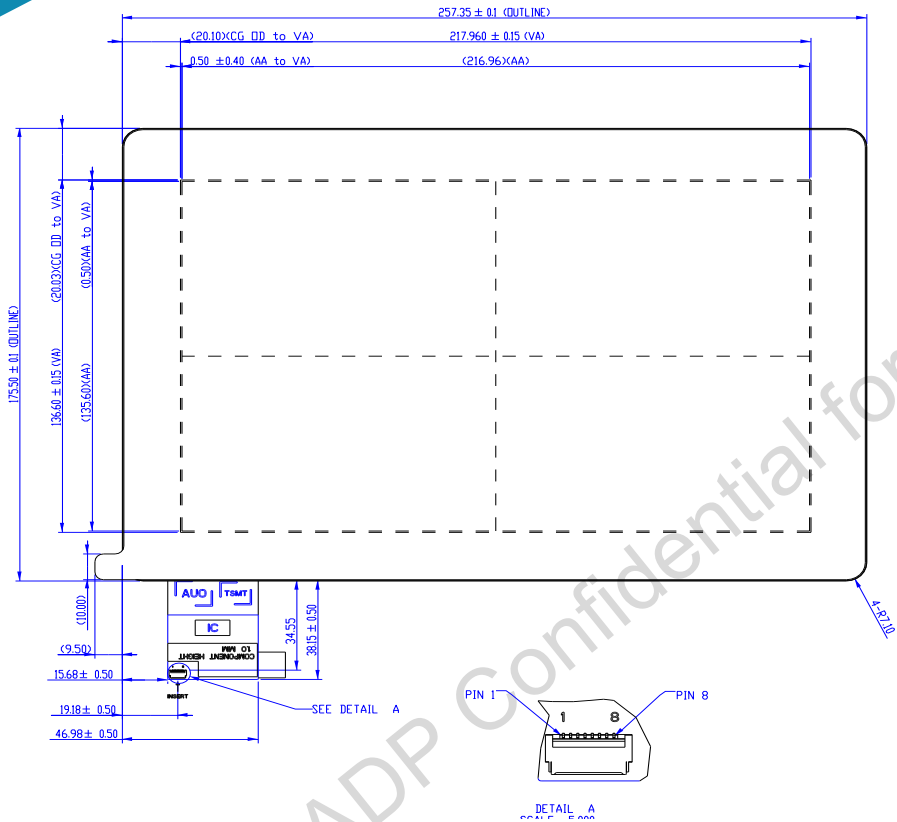


## AUO Display+

# EC Development Schedule



- TP development schedule

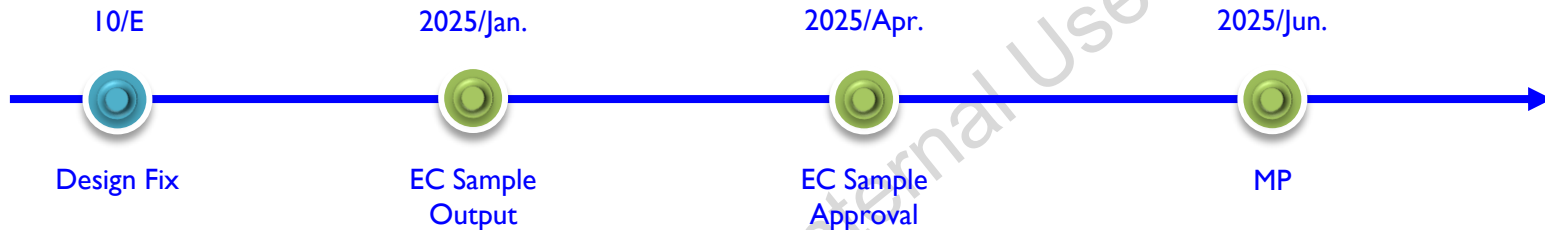

- Each stage will start after customer approval
- The 1<sup>st</sup> sample is equipped with initial firmware, firmware after tuning is expected to be provided in two weeks.
- Schedule will shift according the customer evaluation
- Capacity limitation, sample lead time (working days) listed above is for reference only
- Actual schedule will be updated accordingly



**NUO**

*Innovating Life*